

Engine & Cooling

Fuel

Ignition


Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations

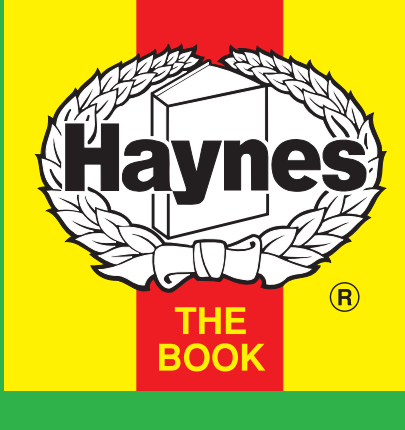

Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system

Shogun / Pajero 2.6

1989 to 1991

Type		4G54
Capacity (cm ³) / number of cylinders		2555 / 4
Compression ratio / pressure	bar	8.4 / ≥8.2
Oil pressure	bar	—
Oil temperature	°C	—
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order		1-3-4-2
No 1 cylinder position		TCE
Thermostat opening temperature	°C	88
Radiator cap pressure	bar	0.76 to 1.04

Fuel system

Shogun / Pajero 2.6

1989 to 1991

Idle speed - manual [auto]	rpm	700±50
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	1.0±0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	—
O2 @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection		Mikuni
Type / ref		32-35 DIDTA-389
Main jet / needle		118.8, 170
Injection pressure	bar	—
Pump pressure	bar	—
Octane rating	RON	91[E 91 RON]

Ignition system

Shogun / Pajero 2.6

1989 to 1991

Type		Electronic
Ignition coil		E089
Primary resistance	ohms	1.08 to 1.32
Ballast resistor	ohms	1.22 to 1.48
Voltage - Tmnl 15(+) to earth	V	—
Distributor		Mitsubishi
Points gap (air gap)	mm	—
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation		Clockwise
Ignition timing - basic [static	° Crankshaft @ rpm	5±2 BTDC @ idle
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	0 @ 1600
	° Crankshaft @ rpm	9 @ 2800
	° Crankshaft @ rpm	19 @ 6000
Vacuum range check	mbar	107 to 480
Maximum vacuum advance	° Crankshaft	20
Spark plugs		NGK/Champion
Type		BPR5ES / RN9YC
Electrode gap	mm	0.70 to 0.80

Electrical system

Shogun / Pajero 2.6

1989 to 1991

Battery	V / CC / RC	12 / 70Ah or / 115 / 390
Alternator voltage / full load current / engine rpm		13.4 to 14.9 / _ / 2500
Starter motor current / voltage - cranking	A / V	—
- locked	A / V	—

Running gear

Shogun / Pajero 2.6

1989 to 1991

Brakes -		
Front (min. friction material thickness)	mm	1.0
Rear (min. friction material thickness)	mm	1.0

Tyres		
Saloon	Size	—
Estate / Van	Size	215x15: 205x16
Pressure - front / rear - Saloon	bar	—
- Estate / Van	bar	¹

Front suspension / wheel alignment

Toe-in (+) / Toe-out (–)	mm [°]	+2.75±1.75
Camber		+1°±30'
Castor		+2°55'±1°
King pin inclination		+8°

Rear suspension / wheel alignment

Toe-in (+) / Toe-out (–)	mm [°]	0
Camber		0

Torque wrench settings

Shogun / Pajero 2.6

1989 to 1991

Cylinder head - stage 1	Nm	90 to 100 C
- stage 2	Nm	100 to 110 H
Cylinder head - stage 3	Nm	M8: 15 to 22
- stage 4	Nm	—
Big-end bearings	Nm	45 to 48
Main bearings	Nm	75 to 85
Clutch cover	Nm	15 to 22
Flywheel [driveplate]	Nm	130 to 140
Front hubs	Nm	WSM
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	100 to 120
Spark plugs	Nm	20 to 30

Capacities

Shogun / Pajero 2.6

1989 to 1991


Engine oil & filter	litres	4.9
Gearbox - 4-speed [5-speed]	litres	2.2 ²
Automatic transmission - refill	litres	7.2
Final drive	litres	Front: 1.1 ³
Cooling system	litres	8.0 ⁴
Fuel tank	litres	60. 4D: 92

Notes and Illustrations


- ¹215x15: 2D: 1.6 / 2.0. 4D: 1.8 / 1.8. 205x16: 2D: 1.8 / 2.2. 4D: 2.1 / 2.4
- ²Transfer box: 2.2. Transfer box with PTO: 2.6
- ³Rear: 1.8. 4D MT: 2.6
- ⁴With rear heater: 8.8

1: Idle speed


2: CO / Mixture

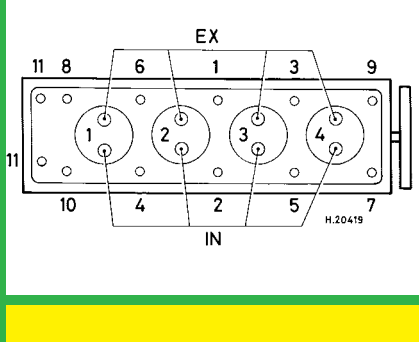

2555 cm³

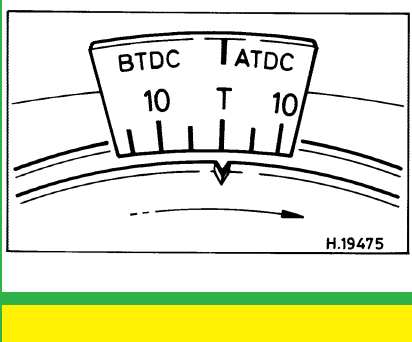

2555 cm³

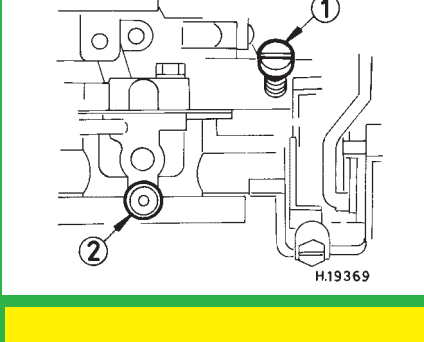

Mikuni