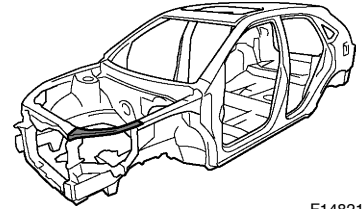
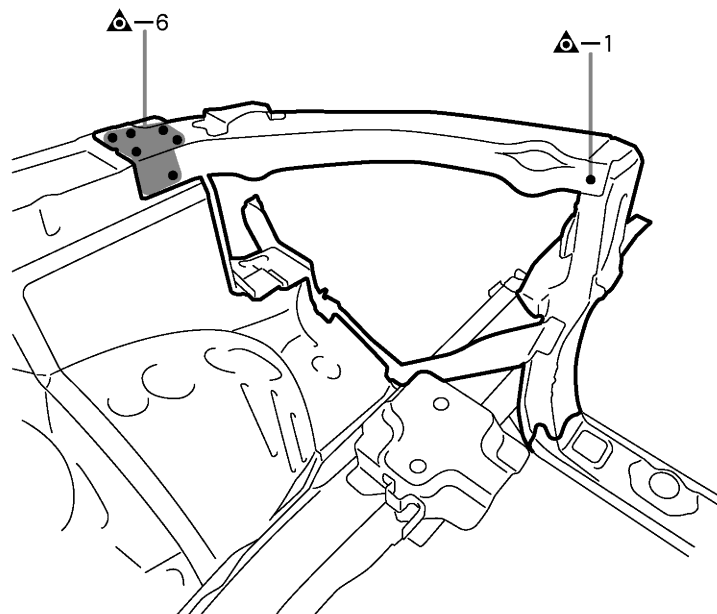
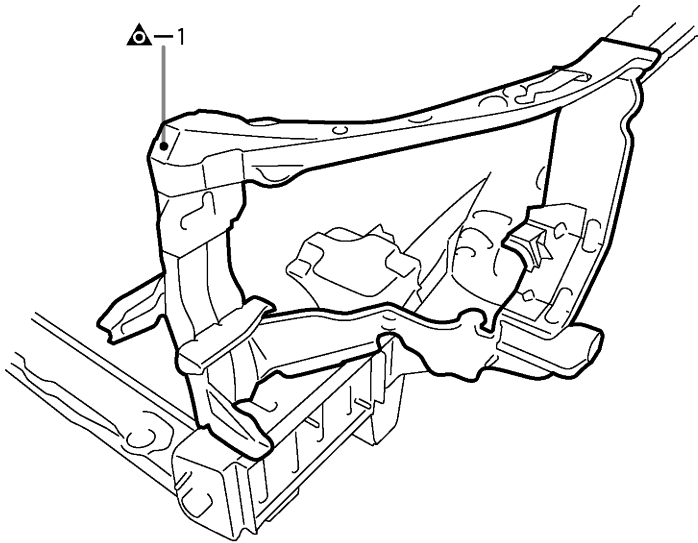


RADIATOR UPPER SUPPORT (ASSY)**REPLACEMENT**


F14821-A

REMOVAL

F20651

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

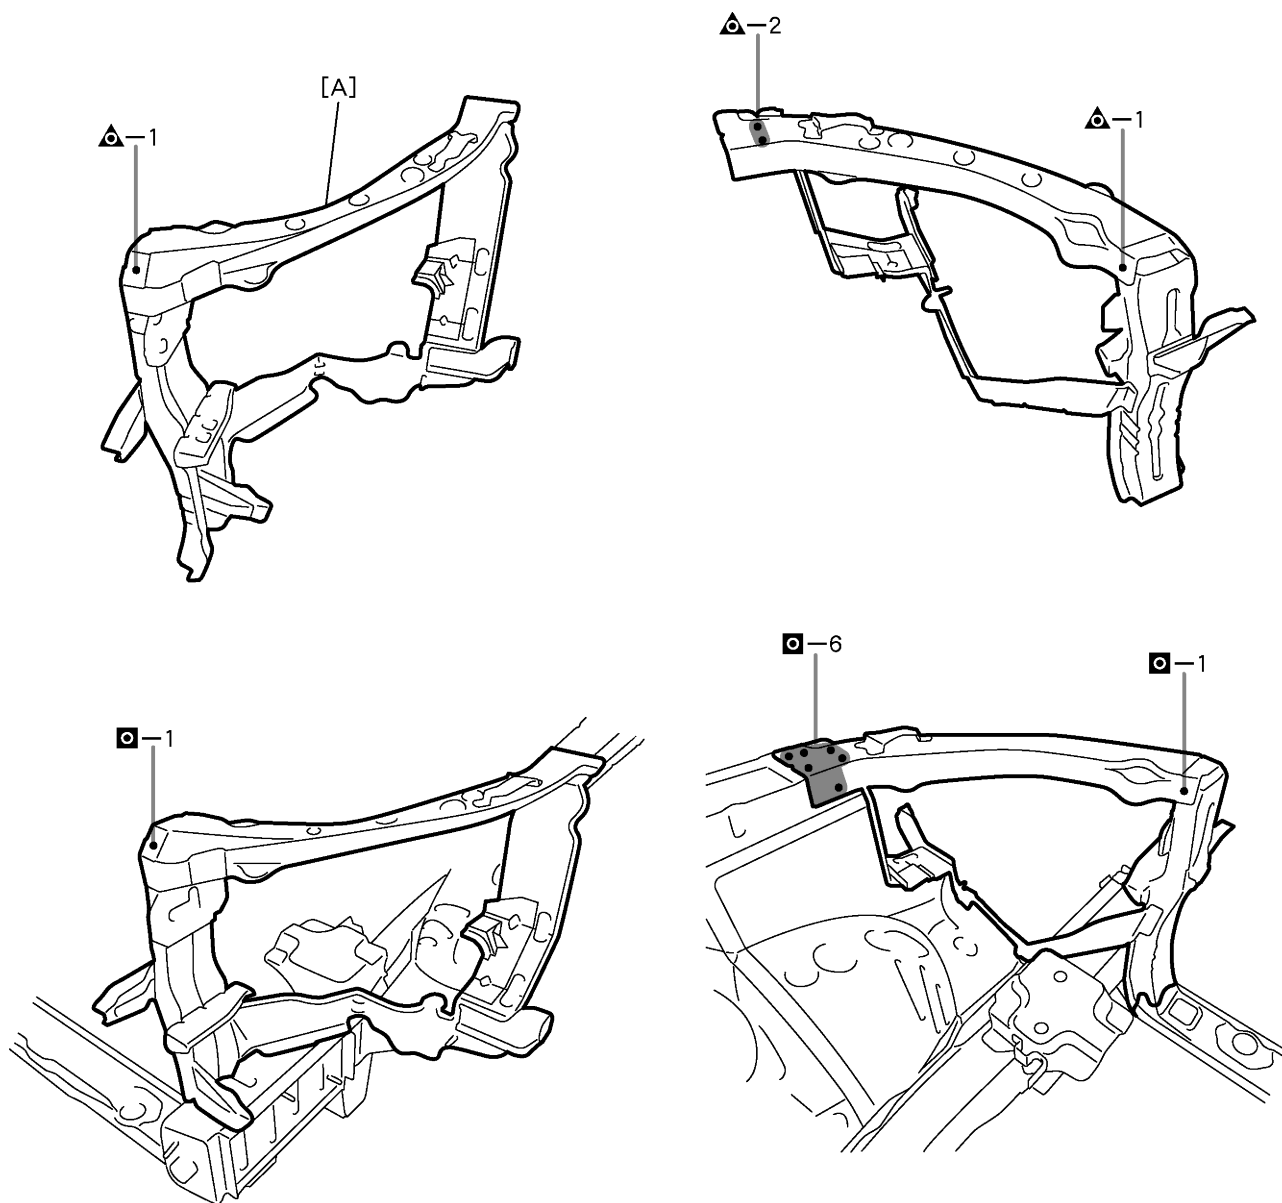

F20652

POINT

- 1 Remove the [A] from the new parts.
- 2 Inspect the fitting of the front fender and hood, etc., before welding, since this affects the appearance of the finish.

PART NAME

[A] Radiator Upper Support