

CLUTCH


SECTION **CL**

CONTENTS

PRECAUTIONS AND PREPARATION	2	Operating Cylinder	7
Precautions	2	Clutch Damper	8
Preparation	2	CLUTCH RELEASE MECHANISM	9
CLUTCH SYSTEM — Hydraulic Type	3	CLUTCH DISC AND CLUTCH COVER	11
CLUTCH SYSTEM — Mechanical Type	4	Clutch Disc	11
INSPECTION AND ADJUSTMENT	5	Clutch Cover and Flywheel	12
Adjusting Clutch Pedal	5	SERVICE DATA AND SPECIFICATIONS (SDS)	13
Bleeding Procedure — Hydraulic type	5	General Specifications	13
HYDRAULIC CLUTCH CONTROL	6	Inspection and Adjustment	14
Clutch Master Cylinder	6		

CL

PRECAUTIONS AND PREPARATION

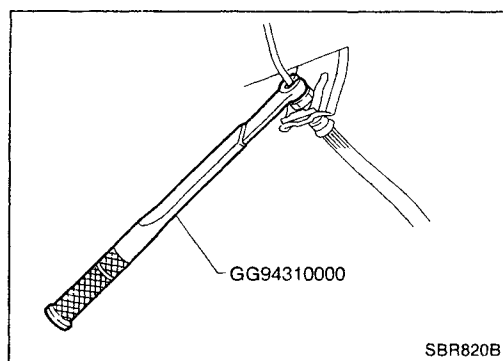

Precautions

- Recommended fluid is brake fluid "DOT 3".
- Do not reuse drained brake fluid.
- Be careful not to splash brake fluid on painted areas.
- When removing and installing clutch piping, use Tool.
- Use new brake fluid to clean or wash all parts of master cylinder, operating cylinder and clutch damper.
- Never use mineral oils such as gasoline or kerosene. It will ruin the rubber parts of the hydraulic system.

WARNING:

After cleaning clutch disc, wipe it with a dust collector. Do not use compressed air.

Preparation

SPECIAL SERVICE TOOLS

Tool number Tool name	Description
GG94310000 Flare nut torque wrench	NT406 a: 10 mm (0.39 in)
KV30101600 (New) KV30101000 (Former) Clutch aligning bar	New Former NT645 a: 15.9 mm (0.626 in) dia. b: 17.9 mm (0.705 in) dia. c: 40 mm (1.57 in)
ST20050240 Diaphragm spring adjusting wrench	NT404 a: 150 mm (5.91 in) b: 25 mm (0.98 in)

COMMERCIAL SERVICE TOOLS

Tool name	Description
Equivalent to GG94310000 ① Flare nut crows foot ② Torque wrench	NT360 a: 10 mm (0.39 in)

CL

SEC. 300·305·306·465

15 - 18 (1.5 - 1.8, 11 - 13)

16 - 22 (1.6 - 2.2, 12 - 16)

8 - 11 (0.8 - 1.1, 69 - 95)

16 - 22 (1.6 - 2.2, 12 - 16)

1 (RHD model)

16 - 22 (1.6 - 2.2, 12 - 16)

1 (LHD model)

13 - 16 (1.3 - 1.6, 9 - 12)

16 - 22 (1.6 - 2.2, 12 - 16)

13 - 16 (1.3 - 1.6, 9 - 12)

16 - 22 (1.6 - 2.2, 12 - 16)

L L

22 - 29 (2.2 - 3.0, 16 - 22)

30 - 40 (3.1 - 4.1, 22 - 30)

13 - 16 (1.3 - 1.6, 9 - 12)

15 - 18 (1.5 - 1.8, 11 - 13)

L : Apply lithium-based grease including molybdenum disulphide.

N·m (kg-m, ft-lb)


N·m (kg-m, in-lb)

SCL667

- CL-3**

CLUTCH SYSTEM — Mechanical Type


SEC. 300·307·465

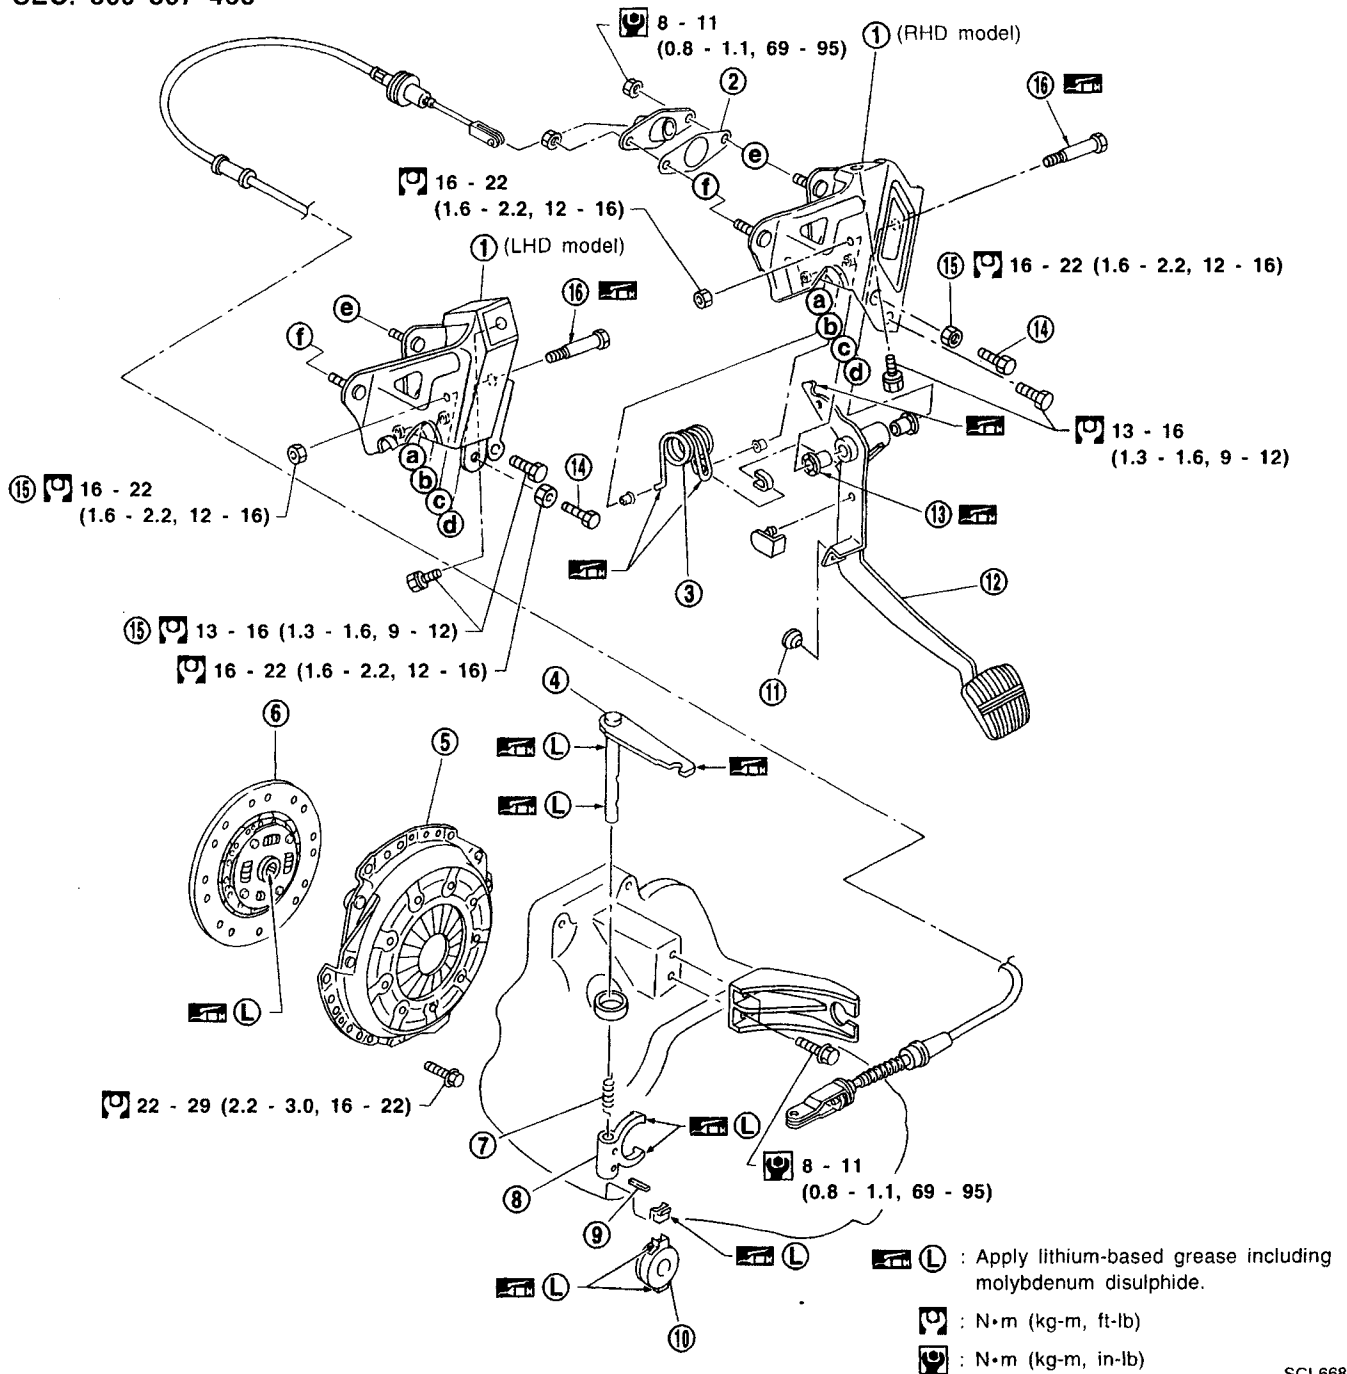

SCL668

- | | | |
|------------------------|-------------------|-----------------|
| ① Clutch pedal bracket | ⑦ Return spring | ⑫ Clutch pedal |
| ② Insulator | ⑧ Clutch lever | ⑬ Bushing |
| ③ Assist spring | ⑨ Spring pin | ⑭ Pedal stopper |
| ④ Withdrawal lever | ⑩ Release bearing | ⑮ Lock nut |
| ⑤ Clutch cover | ⑪ Stopper rubber | ⑯ Fulcrum pin |
| ⑥ Clutch disc | | |

INSPECTION AND ADJUSTMENT

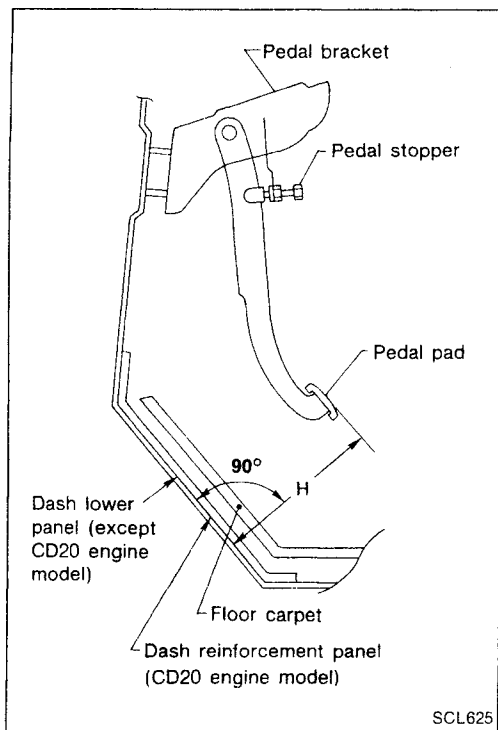


Adjusting Clutch Pedal

1. Adjust pedal height with pedal stopper.

Pedal height "H":

Refer to SDS, CL-14.

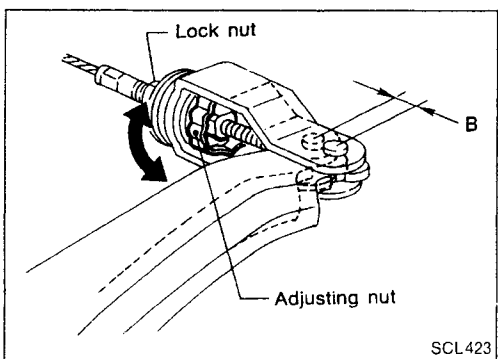

— For mechanical type —


2. Adjust withdrawal lever play "B" according to the following procedure.
 - a. Push withdrawal lever by hand until resistance is felt, and then tighten adjusting nut.
 - b. Turn back adjusting nut 2.5 to 3.5 turns, and then tighten lock nut.

Withdrawal lever play "B":

2.5 - 3.5 mm (0.098 - 0.138 in)

Lock nut:

⦿ : 3 - 4 N·m (0.3 - 0.4 kg-m, 26 - 35 in-lb)

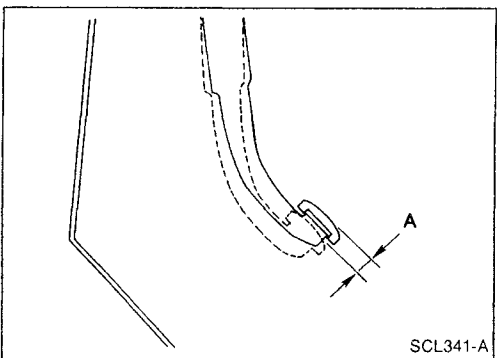


— For hydraulic type and mechanical type —

3. As a final check, measure pedal free travel "A" at center of pedal pad.

Pedal free travel "A":

Refer to SDS, CL-14.

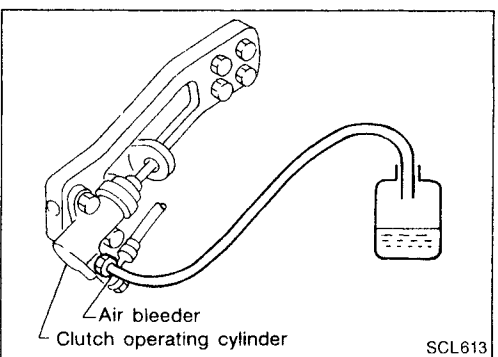

Bleeding Procedure — Hydraulic type


Bleed air according to the following procedure.

- **Carefully monitor fluid level at master cylinder during bleeding operation.**

1. Top up reservoir with recommended brake fluid.
2. Connect a transparent vinyl tube to air bleeder valve.
3. Fully depress clutch pedal several times.
4. With clutch pedal depressed, open bleeder valve to release air, then close bleeder valve.
5. Repeat steps 3 through 5 above until clear brake fluid comes out of air bleeder valve.

HYDRAULIC CLUTCH CONTROL


Clutch Master Cylinder

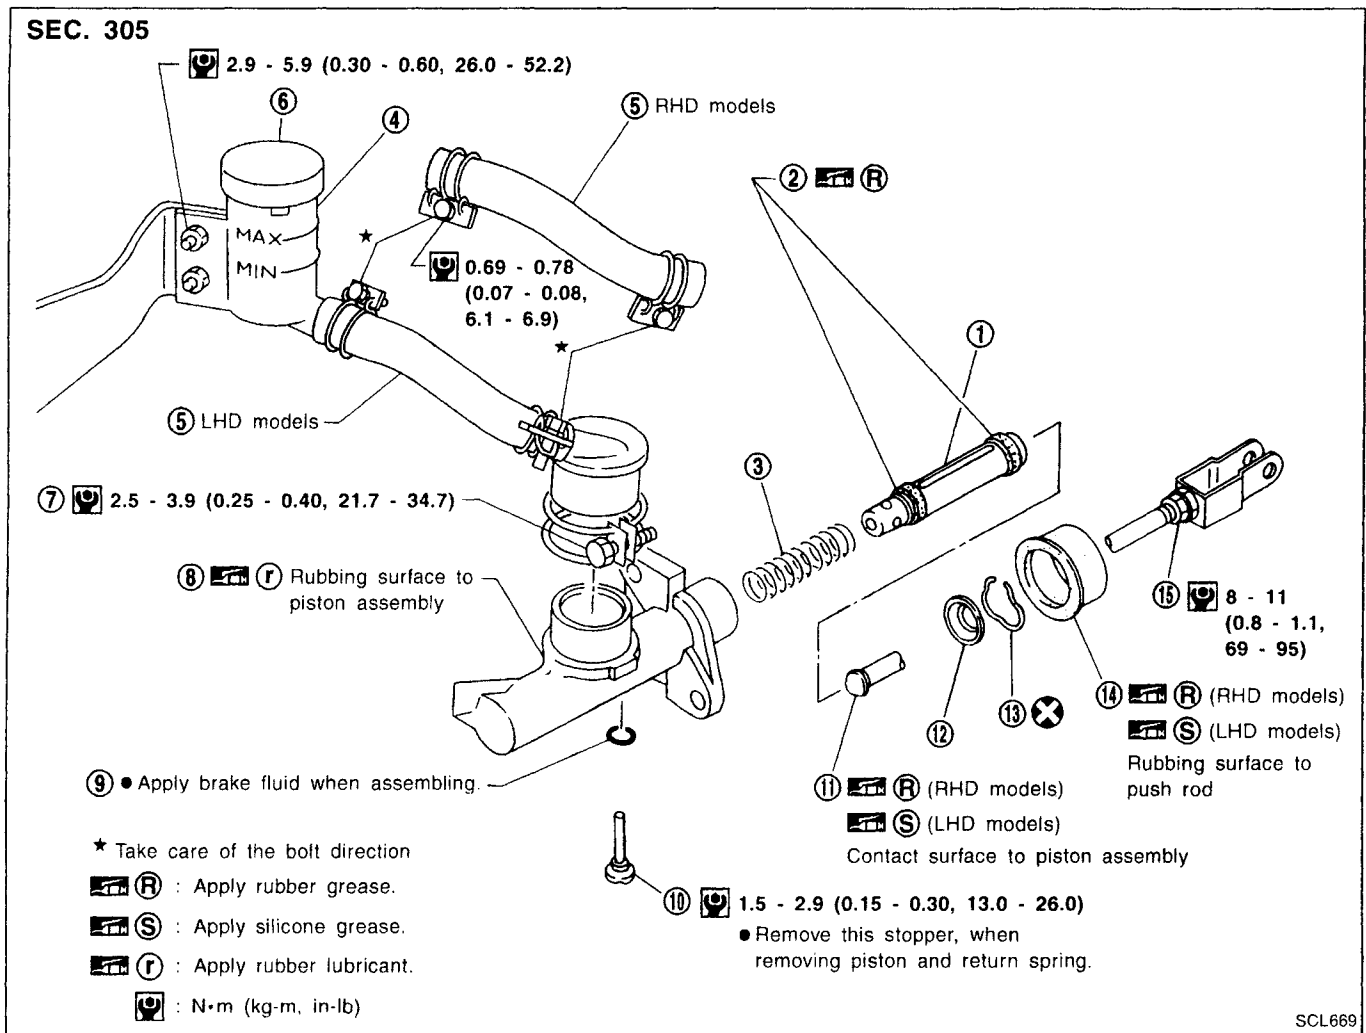

- | | | |
|-------------------|------------------|----------------|
| ① Piston assembly | ⑥ Reservoir cap | ⑪ Push rod |
| ② Piston cup | ⑦ Reservoir band | ⑫ Stopper |
| ③ Return spring | ⑧ Cylinder body | ⑬ Stopper ring |
| ④ Reservoir tank | ⑨ Packing | ⑭ Dust cover |
| ⑤ Reservoir hose | ⑩ Valve stopper | ⑮ Lock nut |

DISASSEMBLY AND ASSEMBLY

- Push piston into cylinder body with screwdriver when removing and installing valve stopper.

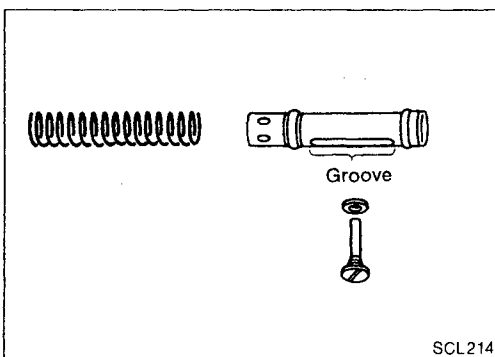

HYDRAULIC CLUTCH CONTROL


Clutch Master Cylinder (Cont'd)

INSPECTION

Check the following items, and replace if necessary.

- Rubbing surface of cylinder and piston, for uneven wear, rust or damage
- Piston with piston cup, for wear or damage
- Return spring, for wear or damage
- Dust cover, for cracks, deformation or damage
- Reservoir, for deformation or damage

Operating Cylinder

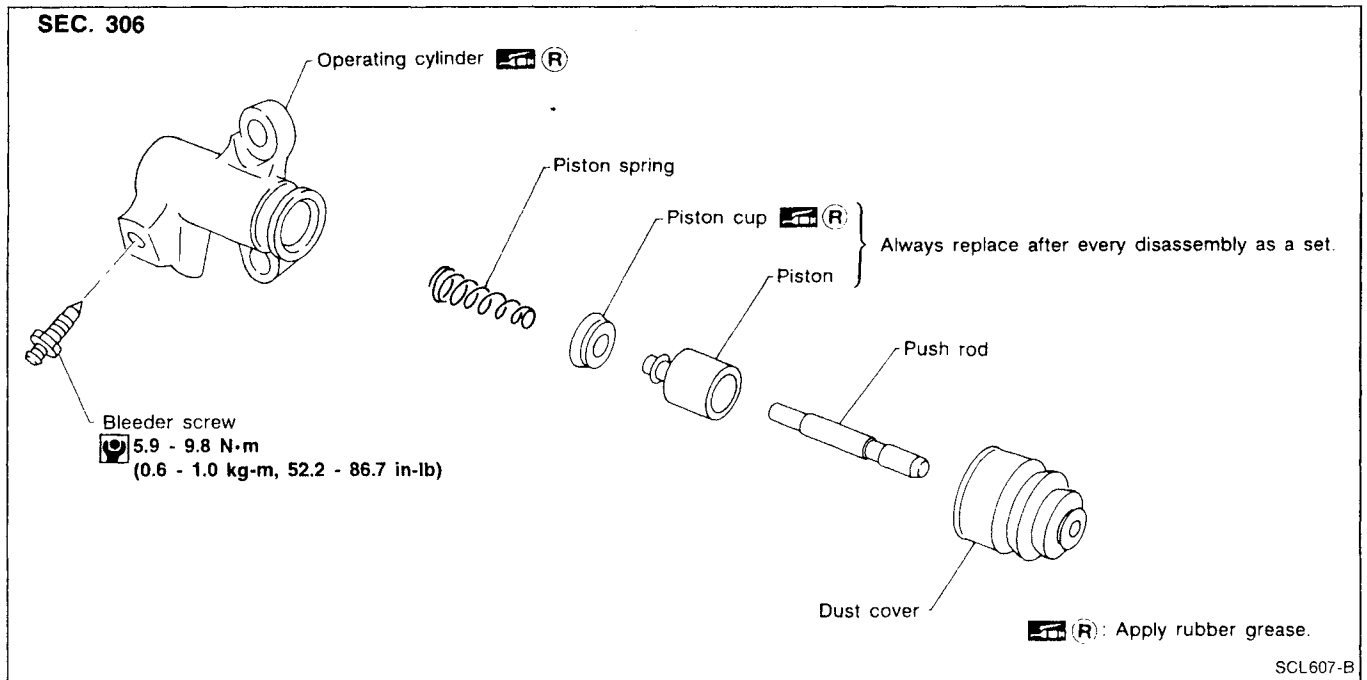

INSPECTION

Check the following items, and replace if necessary.

- Rubbing surface of cylinder and piston, for uneven wear, rust or damage
- Piston with piston cup, for wear or damage
- Piston spring, for wear or damage
- Dust cover, for cracks, deformation or damage


HYDRAULIC CLUTCH CONTROL

Clutch Damper

SEC. 306

Bleeder screw

5.9 - 9.8
(0.60 - 1.00, 52.2 - 86.7)

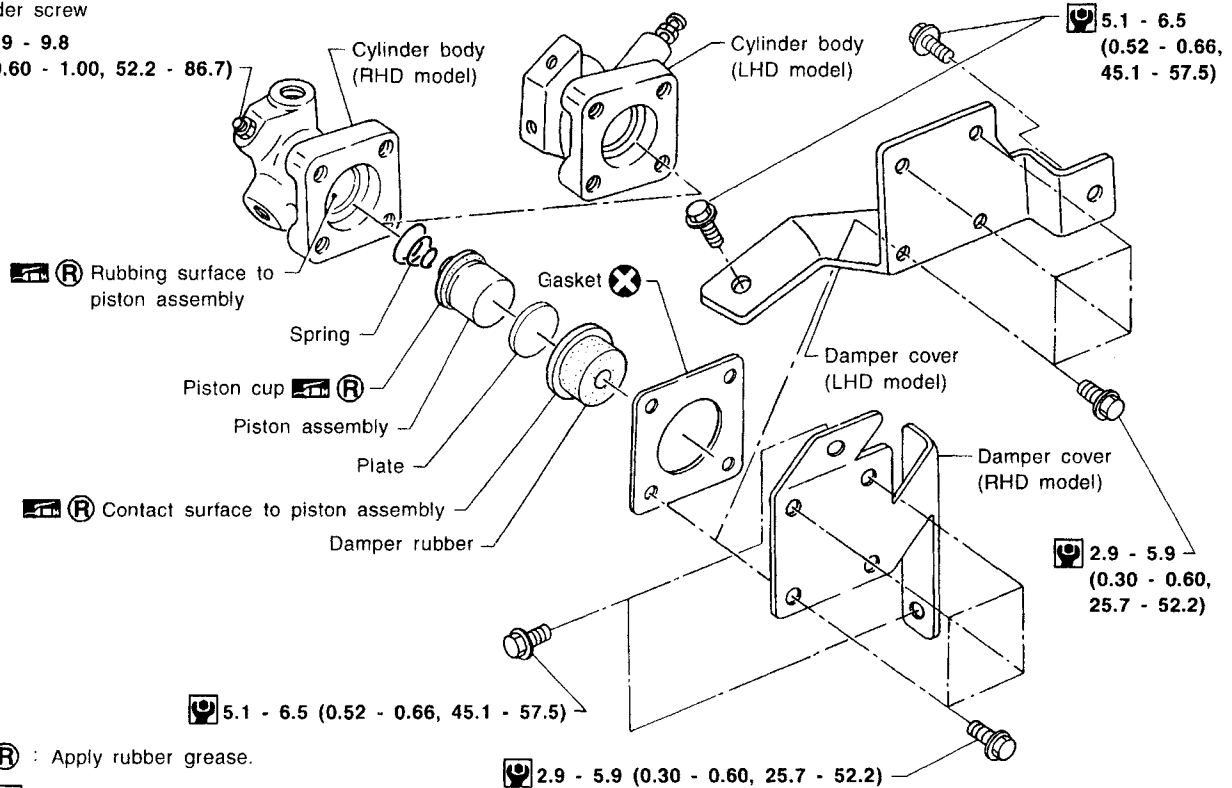


SCL672

INSPECTION

- Check cylinder and piston rubbing surface for uneven wear, rust or damage. Replace if necessary.
- Check damper rubber and piston cup for cracks, deformation or damage. Replace if necessary.

CLUTCH RELEASE MECHANISM

SEC. 321

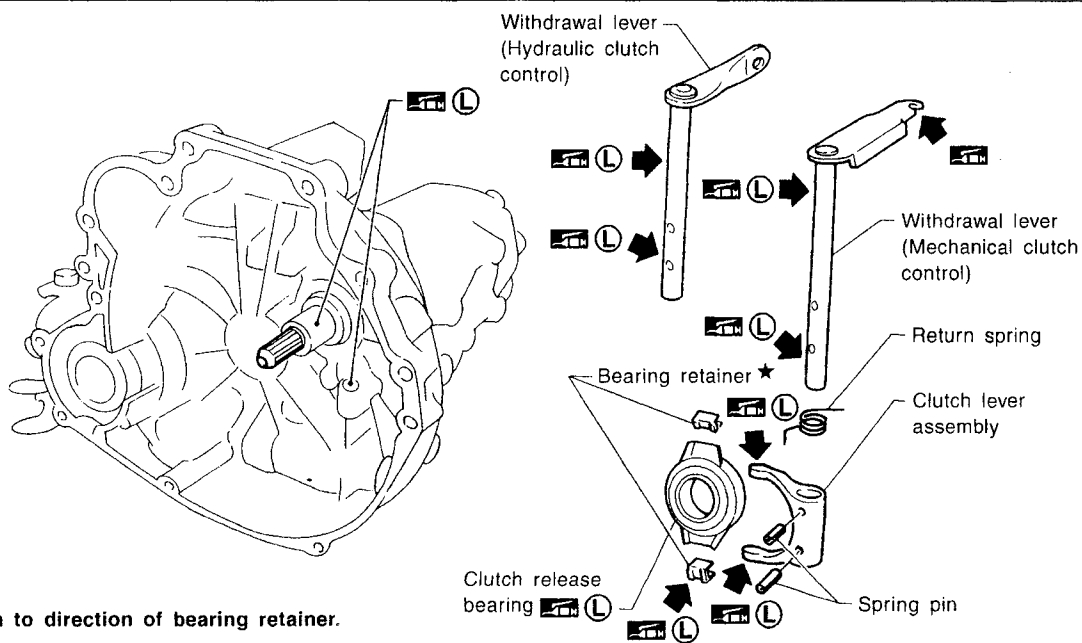


★ : Pay attention to direction of bearing retainer.

(L) : Apply lithium-based grease including molybdenum disulphide.


SCL670

CL

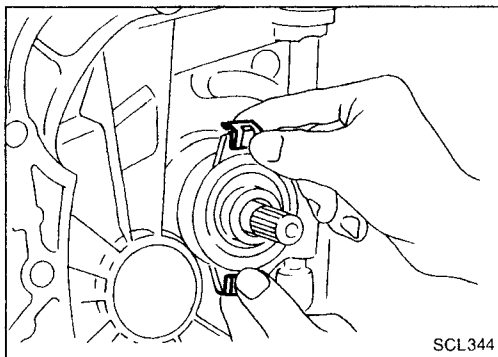

REMOVAL AND INSTALLATION

- Remove release bearing by pulling bearing retainers outward.

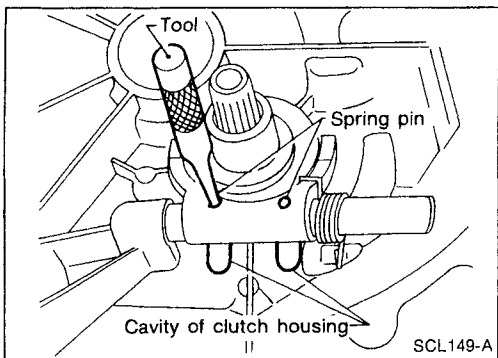


- Align spring pin with cavity of clutch housing and tap out spring pin.

INSPECTION

Check the following items, and replace if necessary.

- Release bearing, to see that it rolls freely and is free from noise, cracks, pitting or wear
- Release sleeve and withdrawal lever rubbing surface, for wear, rust or damage

CLUTCH RELEASE MECHANISM

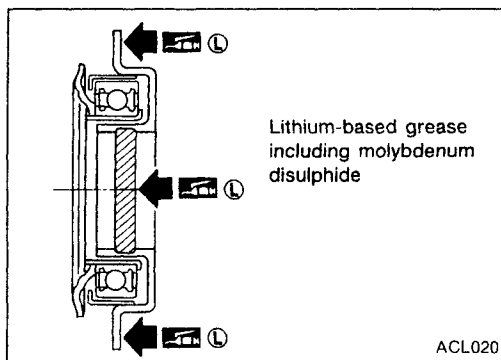


LUBRICATION

- Apply recommended grease to contact surface and rubbing surface.
- **Too much lubricant might damage clutch disc facing.**

CLUTCH DISC AND CLUTCH COVER

SEC. 300

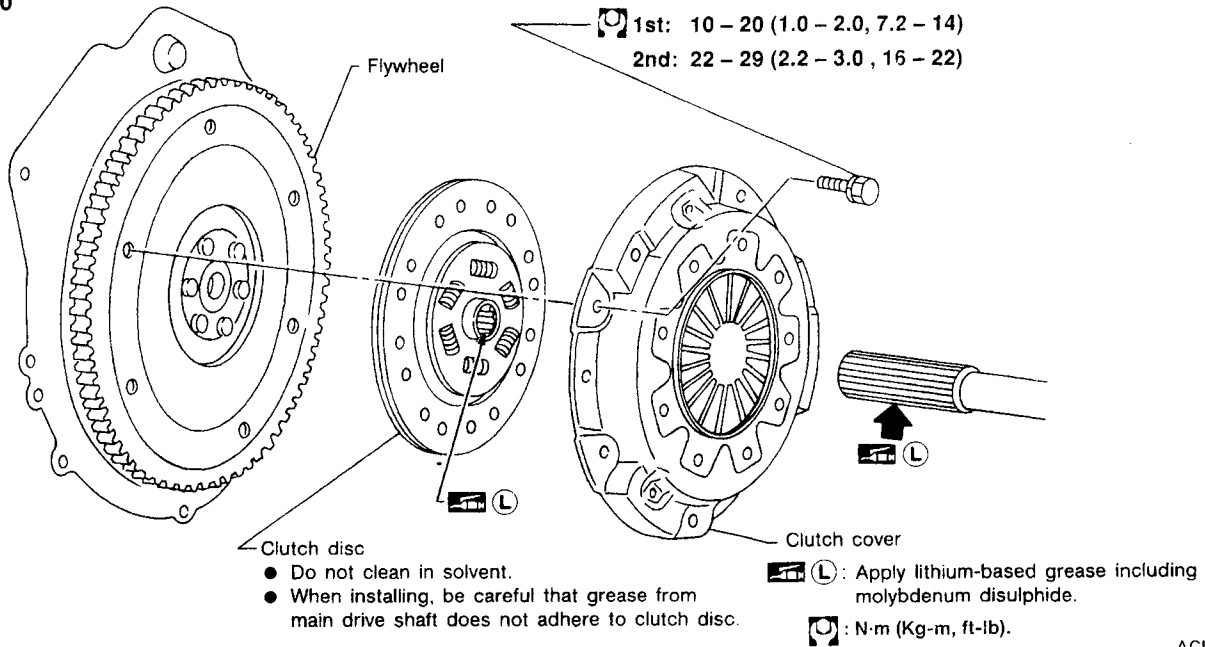

ACL019



Clutch Disc

INSPECTION

Check the following items, and replace if necessary.

- Clutch disc, for burns, discoloration, oil or grease leakage
- Clutch disc, for wear of facing

Wear limit of facing surface to rivet head:
 0.3 mm (0.012 in)

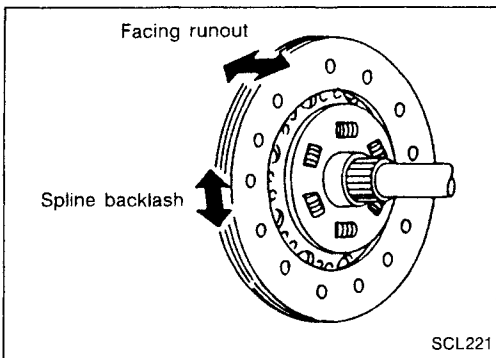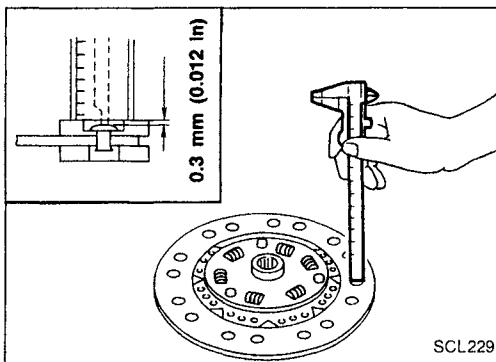

- Clutch disc, for backlash of spline and runout of facing.

Maximum backlash of spline (at outer edge of disc):

Model 180	0.7 mm (0.028 in)
Model 190 and 200	0.8 mm (0.031 in)
Model 215	0.9 mm (0.035 in)

Runout limit:

1.0 mm (0.039 in)


Distance of runout check point (from hub center):

Model 180	85 mm (3.35 in)
Model 190	90 mm (3.54 in)
Model 200	95 mm (3.74 in)
Model 215	102.5 mm (4.04 in)

CLUTCH DISC AND CLUTCH COVER

Clutch Disc (Cont'd) INSTALLATION

- Apply recommended grease to contact surface of splines.
- Too much lubricant may damage clutch disc facing.

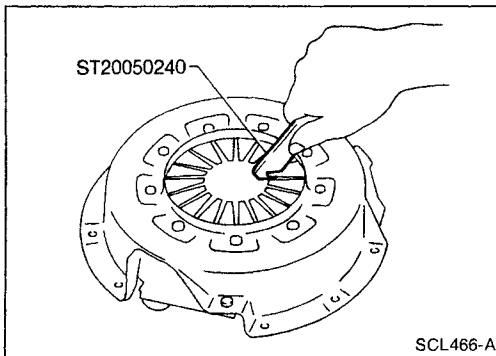

Clutch Cover and Flywheel

INSPECTION AND ADJUSTMENT


- Check clutch cover, installed on vehicle, for uneven diaphragm spring toe height.

Uneven limit:

Model 180 1.0 mm (0.039 in)

Model 190, 200 and 215 0.7 mm (0.028 in)

- If out of limit, adjust the height with Tool.

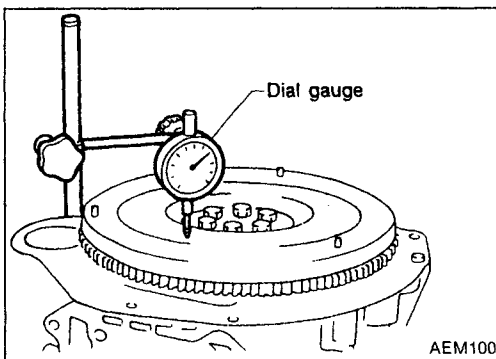

FLYWHEEL INSPECTION


CAUTION:

Do not allow any magnetic materials to contact the ring gear teeth.

- Inspect contact surface of flywheel for slight burns or discoloration. Clean flywheel with emery paper.
- Check flywheel runout.

Maximum allowable runout:

Refer to EM section ("Inspection", "CYLINDER BLOCK").

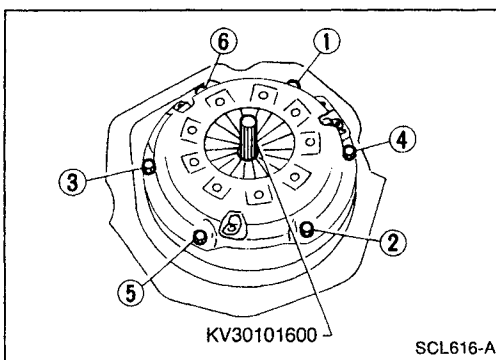

INSTALLATION

- Insert Tool into clutch disc hub when installing clutch cover and disc.
- Be careful not to allow grease to contaminate clutch facing.
- Tighten bolts in numerical order, in two steps.

First step:

⌚: 10 - 20 N·m (1.0 - 2.0 kg-m, 7 - 14 ft-lb)

Final step:

⌚: 22 - 29 N·m (2.2 - 3.0 kg-m, 16 - 22 ft-lb)

SERVICE DATA AND SPECIFICATIONS (SDS)

General Specifications

CLUTCH CONTROL SYSTEM

Engine	Except for CD20	CD20
Type of clutch control	Mechanical	Hydraulic

CLUTCH DAMPER

Inner diameter	mm (in)	19.05 (3/4)
----------------	---------	-------------

CLUTCH MASTER CYLINDER

Inner diameter	mm (in)	15.87 (5/8)
----------------	---------	-------------

CLUTCH OPERATING CYLINDER

Inner diameter	mm (in)	17.46 (11/16)
----------------	---------	---------------

CLUTCH DISC

Unit: mm (in)

Engine	GA14DE	GA15DE, GA16DE	CD20	SR20DE
Model	180	190	200	215
Facing size (Outer dia. x inner dia. x thickness)	180 x 125 x 3.5 (7.09 x 4.92 x 0.138)	190 x 132 x 3.5 (7.48 x 5.20 x 0.138)	200 x 130 x 3.5 (7.87 x 5.12 x 0.138)	215 x 140 x 3.5 (8.46 x 5.51 x 0.138)
Thickness of disc assembly with load	8.0 - 8.4 (0.315 - 0.331) with 3,923 N (400 kg, A2 lb)			7.6 - 8.0 (0.299 - 0.315) with 3,923 N (400 kg, 882 lb)

CLUTCH COVER

Engine	GA14DE	GA15DE	GA16DE	CD20	SR20DE
Model	180	190		200	215
Full-load N (kg, lb)	3,236 (330, 728)	3,432 (350, 772)	3,825 (390, 860)	3,481 (355, 783)	4,413 (450, 992)

CL

SERVICE DATA AND SPECIFICATIONS (SDS)

Inspection and Adjustment

CLUTCH PEDAL

Unit: mm (in)

Applied model	Except for CD20 engine models		CD20 engine models	
	RHD	LHD	RHD	LHD
Pedal height "H"	159 - 169 (6.26 - 6.65)*1	153 - 163 (6.02 - 6.42)*2	156 - 166 (6.14 - 6.54)*1	149 - 159 (5.87 - 6.26)*2
Pedal free travel "A" (at pedal pad)	11 - 15 (0.43 - 0.59)		9 - 16 (0.35 - 0.63)	
Withdrawal lever play "B"	2.5 - 3.5 (0.098 - 0.138)		—	

*1: Measured from surface of dash reinforcement panel to surface of pedal pad.

*2: Measured from surface of dash lower panel to surface of pedal pad.

CLUTCH DISC

Unit: mm (in)

Disc model	180	190	200	215
Wear limit of facing surface to rivet head	0.3 (0.012)			
Runout limit of facing	1.0 (0.039)			
Distance of runout check point (from hub center)	85 (3.35)	90 (3.54)	95 (3.74)	102.5 (4.04)
Maximum backlash of spline (at outer edge of disc)	0.7 (0.028)	0.8 (0.031)		0.9 (0.035)

CLUTCH COVER

Unit: mm (in)

Cover model	180	190	200	215
Uneven limit of diaphragm spring toe height	1.0 (0.039)	0.7 (0.028)		