


8. Tweeter

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the front door trim. <Ref. to EI-47, RE-MOVAL, Door Trim.>
- 3) Remove the tweeter mounting screws.

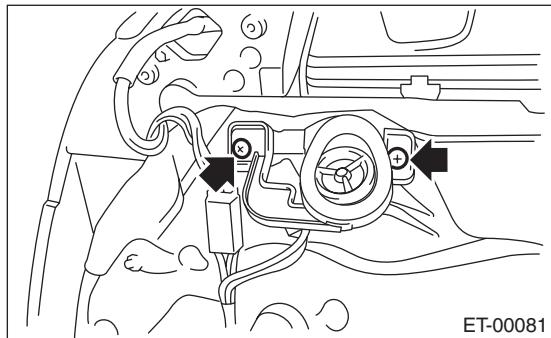

- 4) Disconnect the harness connector and remove the tweeter.

B: INSTALLATION

Install in the reverse order of removal.