


35. Day Time Running Resistor

A: REMOVAL

- 1) Remove the front bumper face assembly. <Ref. to EI-39, REMOVAL, Front Bumper.>
- 2) Remove the daytime running resistor.
 - (1) Disconnect the connector.
 - (2) Remove the bolt, and remove the daytime running resistor.

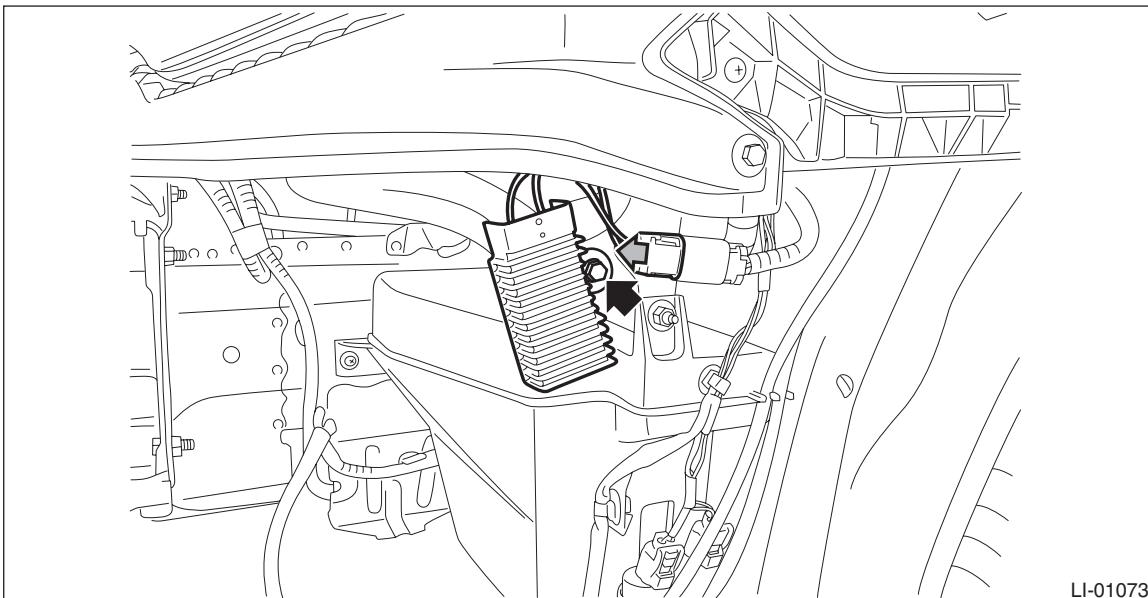

B: INSTALLATION

Install each part in the reverse order of removal.

Tightening torque:

Daytime running resistor: 7.5 N·m (0.76 kgf-m, 5.5 ft-lb)