
FRONT FENDER APRON (ASSY)

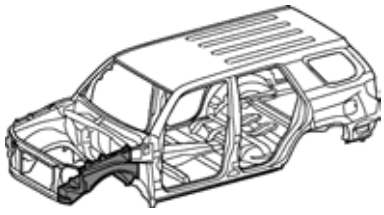

F42921A


With the radiator support and front body pillar lower gusset removed.

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: Plug Weld : Body Sealer

F42921B

REMOVAL·INSTALLATION

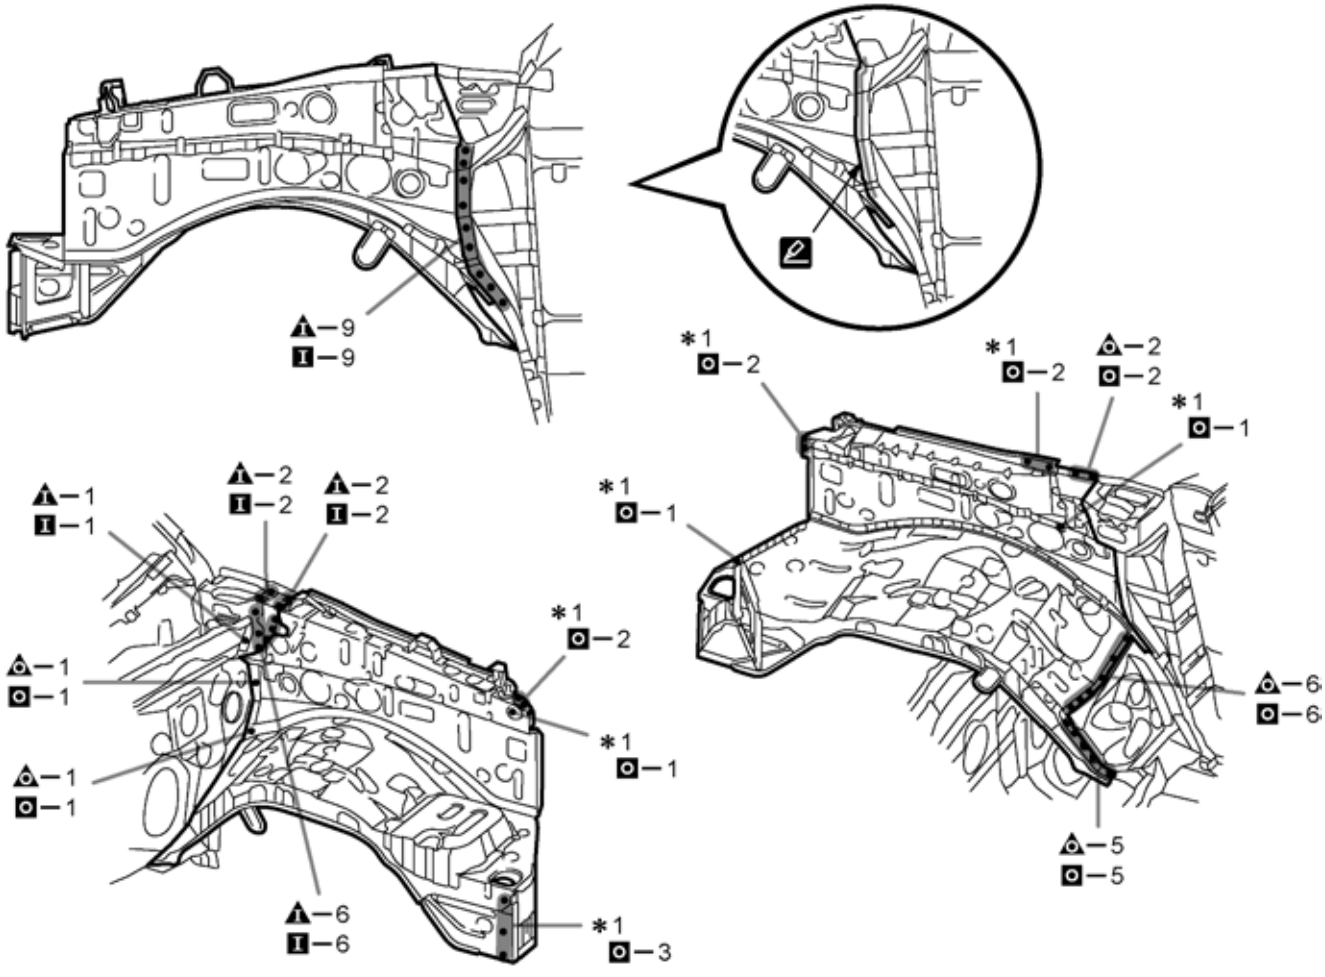

F42921

INSTALLATION POINT

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
3 *1 is only for installation.
4 Before installing a new part, apply body sealer.
HINT:
Apply body sealer in an even, continuous bead.
5 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
6 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.