
VEHICLE POSITION MARK DEVIATES GREATLY

INSPECTION PROCEDURE

1 CHECK THE GPS MARK

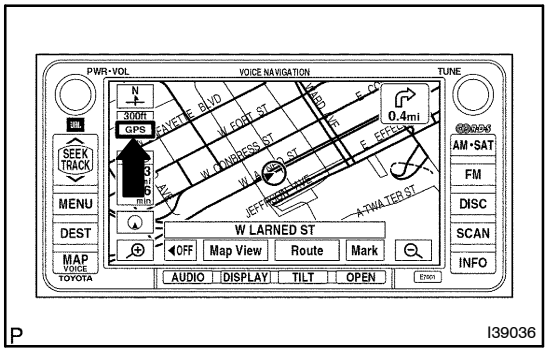

P I39036


(a) Check that the GPS mark is displayed.
Standard:The GPS mark is displayed.

NG → **GO TO "GPS MARK IS NOT DISPLAYED" IN THE FLOW CHART (SEE PAGE 05–92)**

OK

2 NAVIGATION CHECK MODE(VEHICLE SENSORS CHECK)

(a) Enter the "Navigation Check" mode (Vehicle Sensors) (see page 05–56).

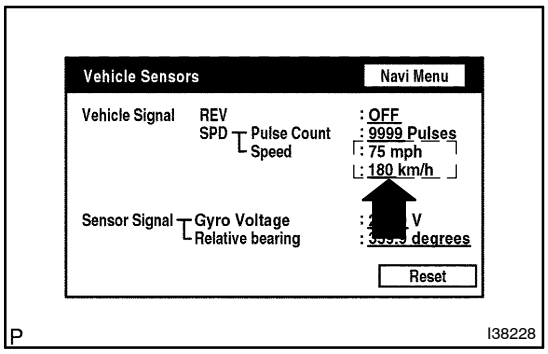


P I38228

(b) While driving, compare the "SPEED" indicator to the reading on the speedometer. Check that these readings are almost the same.
Standard: The readings are almost the same.

NG → **GO TO "SPEED SIGNAL CIRCUIT" IN THE FLOW CHART (SEE PAGE 05–106)**

OK

3 NAVIGATION CHECK MODE(VEHICLE SENSORS CHECK)

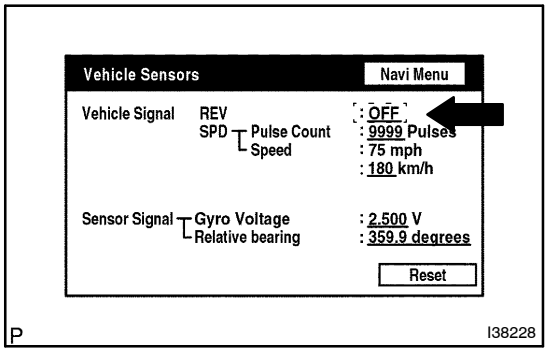

(a) Move the shift lever to the R or P position.

Standard:

Shift lever	Display
P	OFF
R	ON

HINT:

The display is updated once per second. As a result, it is normal for the display to lag behind the actual change in the switch.

NG → **GO TO "REVERSE SIGNAL CIRCUIT" IN THE FLOW CHART (SEE PAGE 05–109)**

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE (SEE PAGE 05–46)