
MAP DISC READ ERROR

INSPECTION PROCEDURE

1	CHECK THE MAP DISC

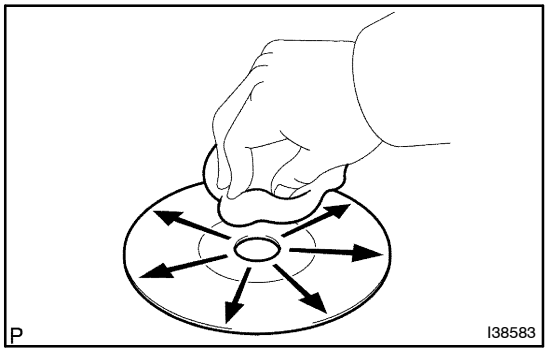

(a) Check for dirt on the map disc surface.
Standard: No dirt is on the map disc surface.


HINT:
If dirt is on the map disc surface, wipe it with a soft cloth from inside to outside in a radial direction.

NOTICE:
Do not use conventional record cleaner or anti–static preservative.

NG → **CLEAN THE MAP DISC**

OK

2	CHECK THE MAP DISC

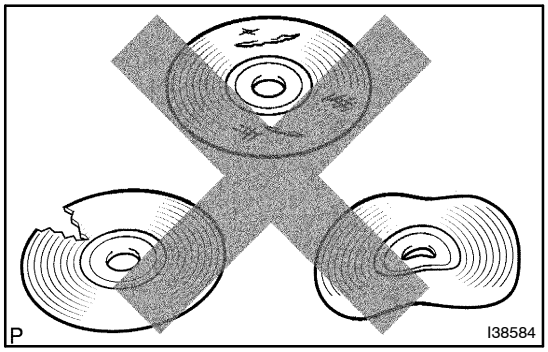

(a) Check that the map disc is not deformed or cracked.
Standard: No deformations or cracks appear on the map disc.

NG → **REPLACE THE MAP DISC**

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN DIAGNOSTIC TROUBLE CODE CHART (SEE PAGE 05–44)