

FENDER OUTER PANEL (CUT)




F20543A

REPLACEMENT

REMOVAL

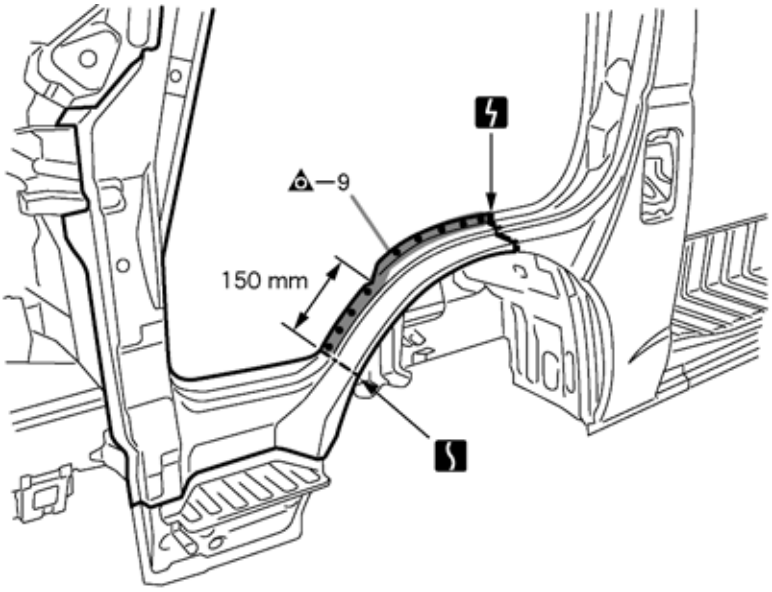


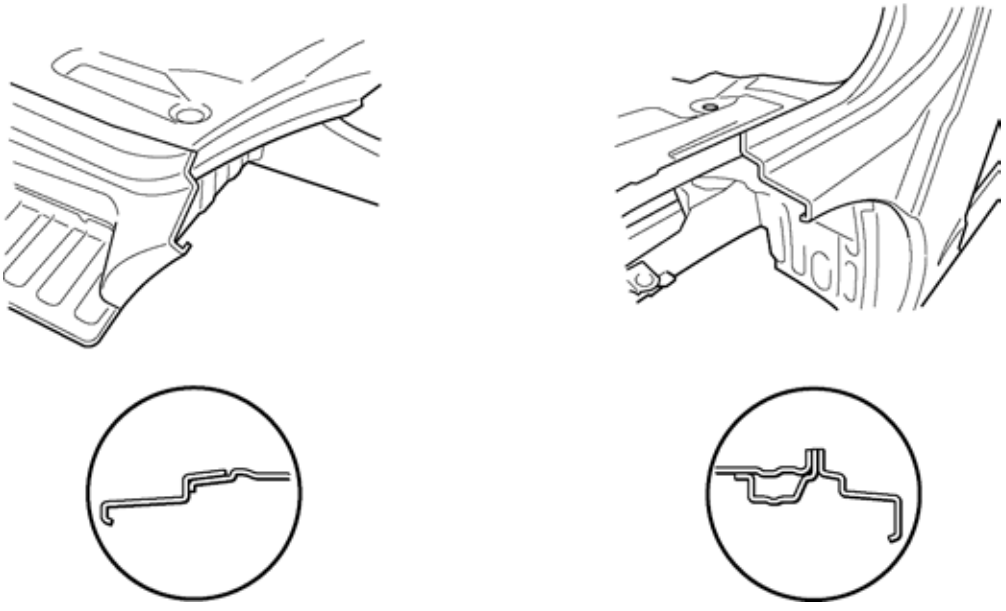


F20543

150 mm (5.91 in.)

〔Standard body(Driver's Side)〕

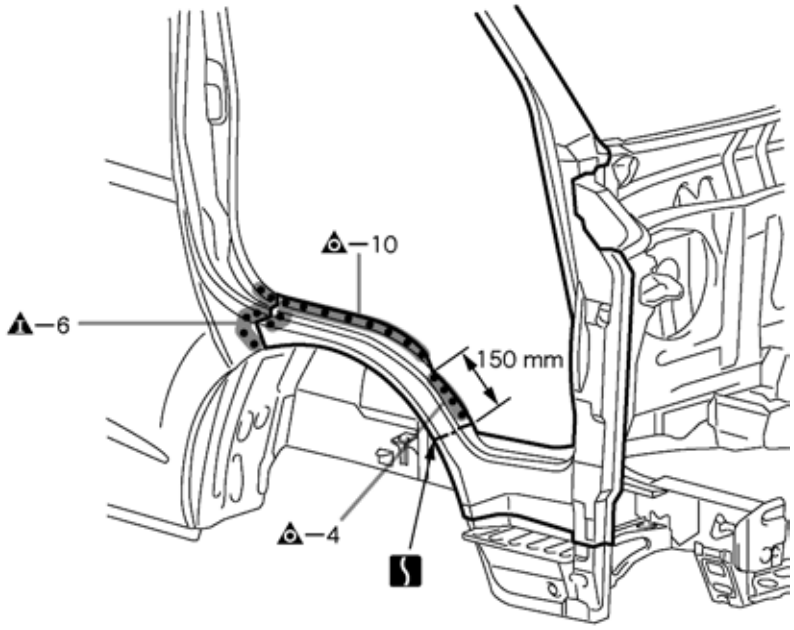

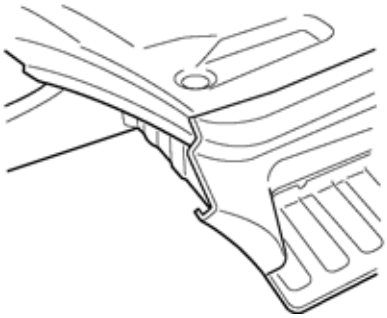




F20544


150 mm (5.91 in.)

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

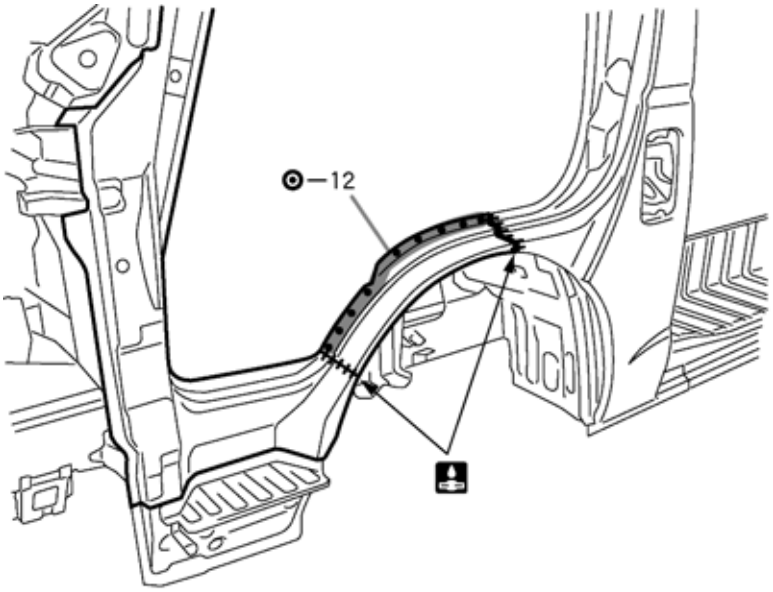

〔Standard body(Driver's Side)〕

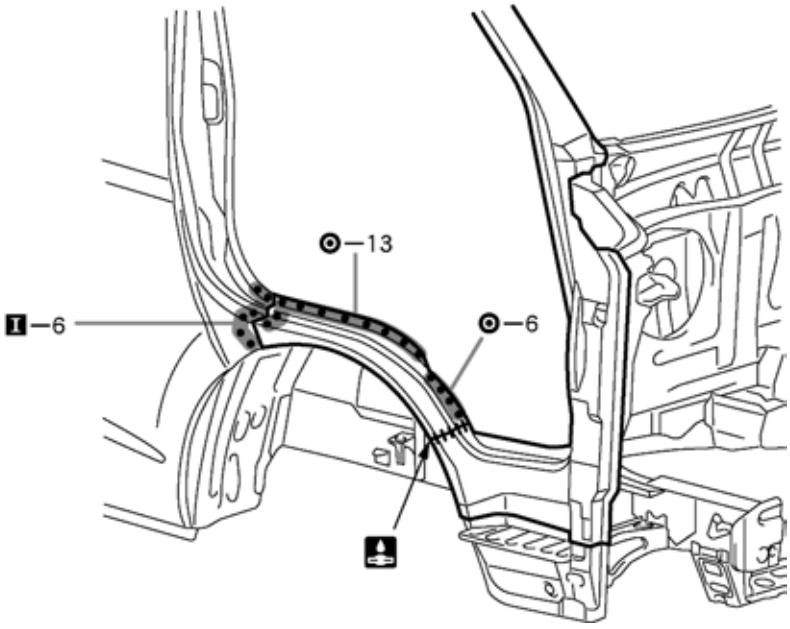

F20545