
FRONT SIDE OUTER PANEL (ASSY): 4-DOOR (FRONT PASSENGER'S SIDE)




F20584A

REPLACEMENT

With the rocker outer panel and quarter panel removed.

REMOVAL

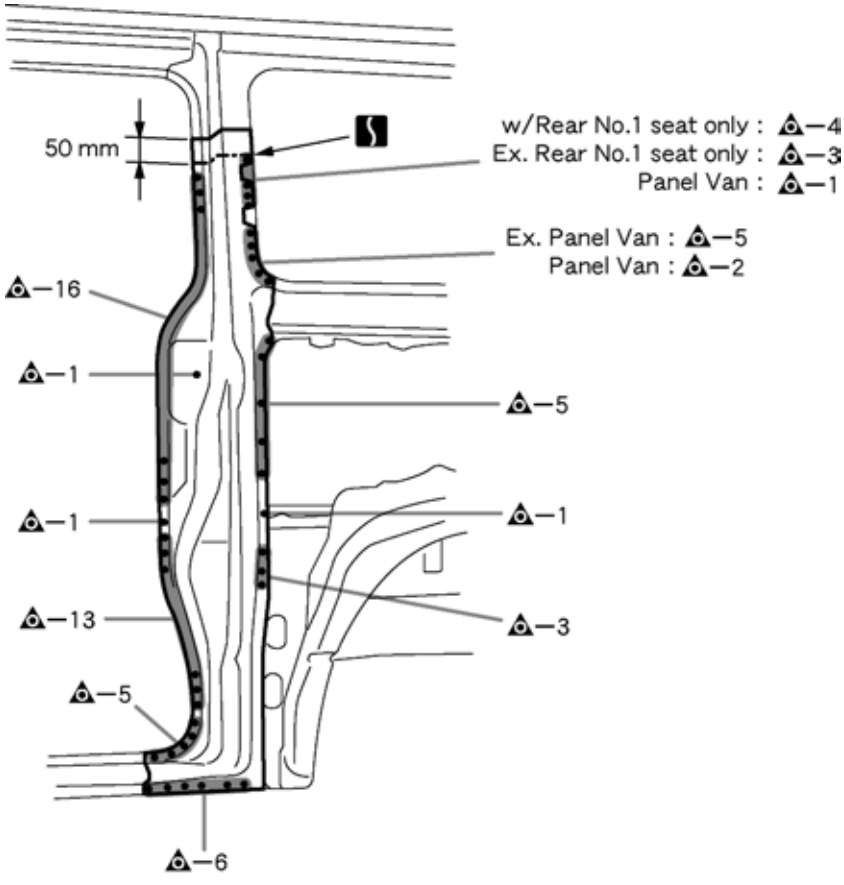


F20584

50 mm (1.97 in.)

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

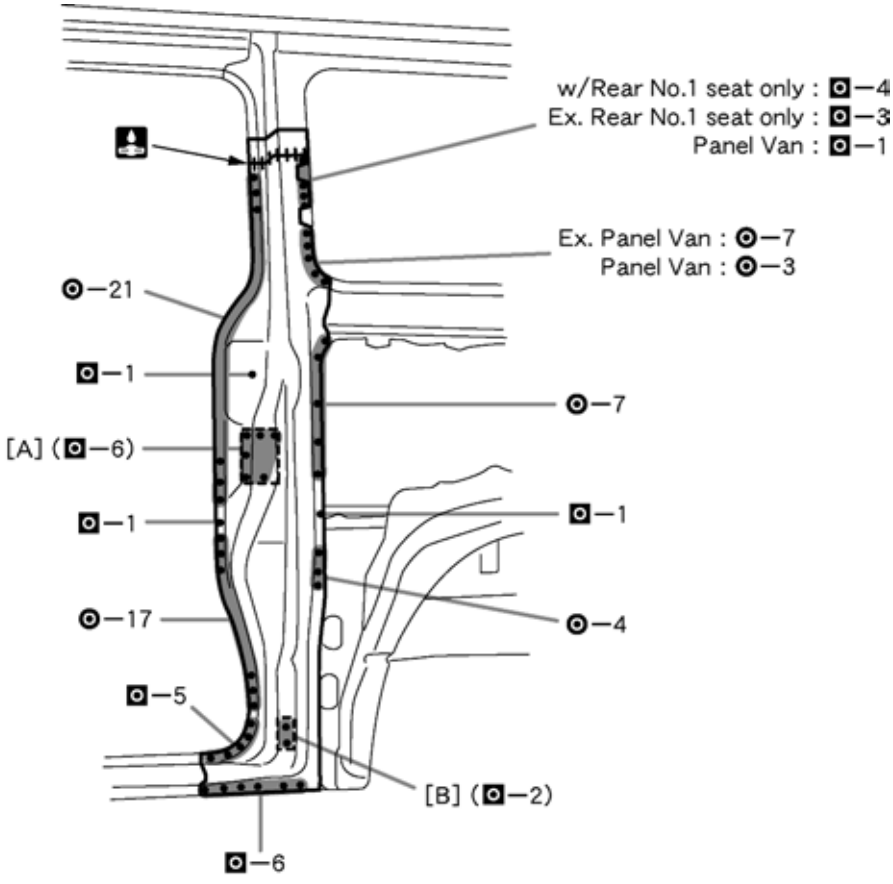

F20585

PART NAME

[A] Side Door Lock Striker Reinforement [B] No.3 Lower Rail Inner Plate