INTRODUCTION

OUTLINE OF NEW FEATURES

The following changes have been made for the new HIACE.


1. Model Line-up

The newly added models are shown in the table below.

Destination	Newly Added Model Code
G.C.C. Countries	● TRH203L-REPDKV ● TRH213L-JEPDKV ● TRH223L-LEPDKV ● TRH223L-LEPNKV

2. Exterior

An engine mark has been attached on the center pillar for the models for Vietnam. (2TR-FE engine equipped vehicles: VVT-i, 2KD-FTV engine equipped vehicles: D-4D)

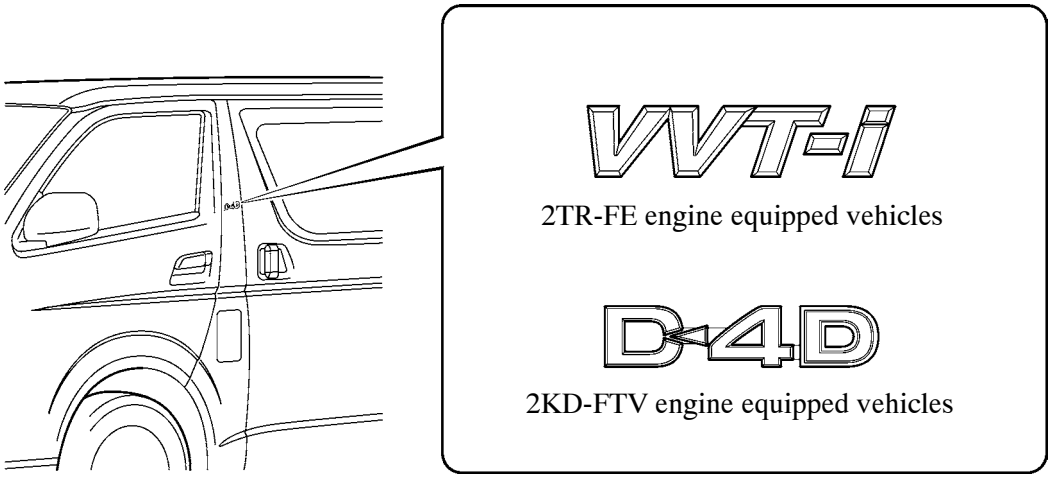

Engine Marks 04Z5MO01Z

3. Exterior Color

Black mica (color number: 209) is available as an option for the Hong Kong package models.

4. Engine


- It was decided that the 2TR-FE engine and 1KD-FTV engine for Hong Kong would comply with the EURO V regulations.
- The air cleaner shape has been changed from a square type to a round type for the 2TR-FE engine equipped vehicles for China and countries other than Hong Kong.
- A Brake Override System has been adopted for all models.

5. Transmission

The transmission has been changed from a manual transmission (R351) to an automatic transmission (A343E) for the 2TR-FE engine equipped Commuter models for G.C.C.


6. Body

- Dash silencer has been provided for the 1KD-FTV engine equipped Hong Kong package models.

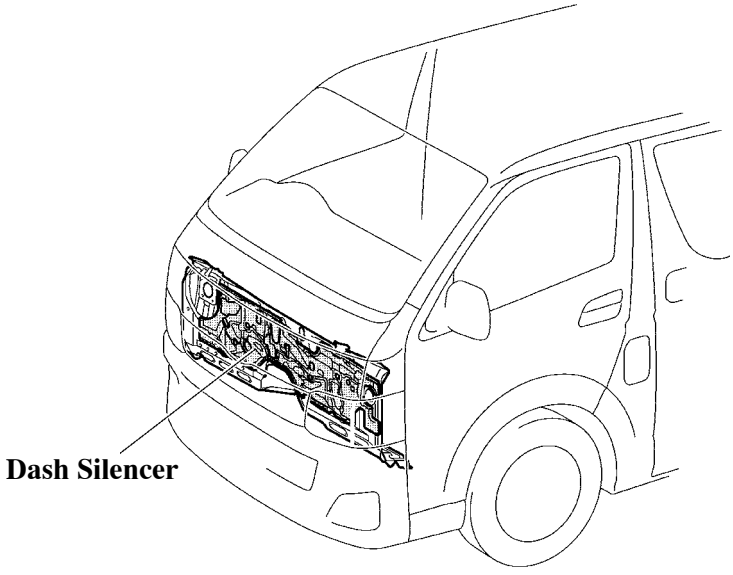


04Z5MO02

- Dash asphalt seats have been provided to the dash panel of the 1KD-FTV engine equipped Hong Kong package AT models.

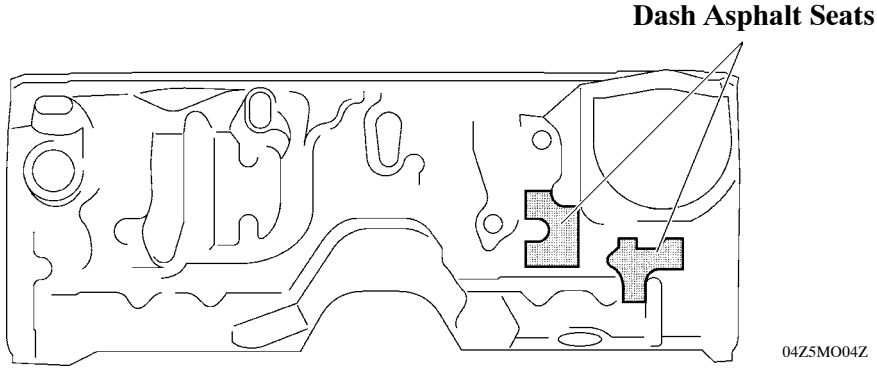

04Z5MO04Z

- Pad (foamed PP material) is provided to the steering column lower cover for the models for Australia and the New Zealand package models.

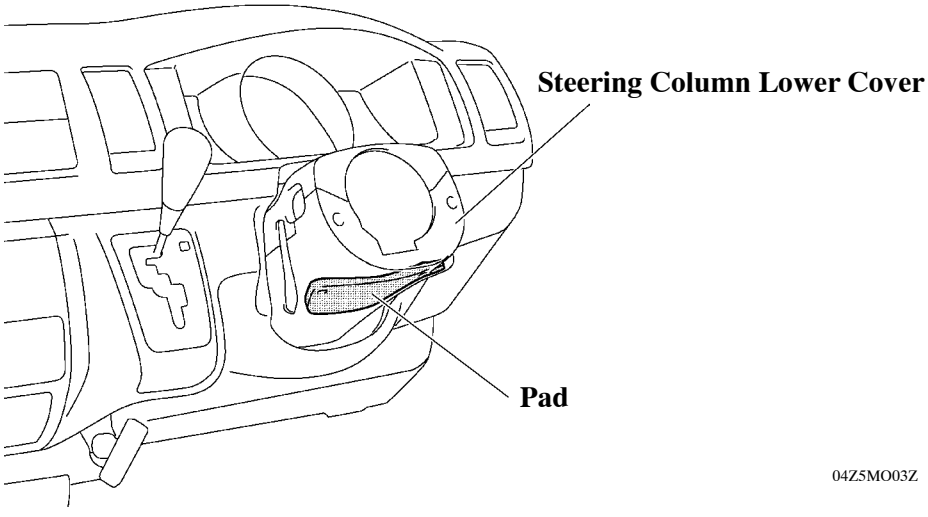

04Z5MO03Z

7. Seat

Rear seats with head rests are available as an option for the Super Long Commuter DX grade models for General Countries.


8. Seat Belt

Low friction webbing that has reduced the frictions between webbings has been adopted for the seat belts for rear No. 1 to No. 4 seats to reduce a feeling of pressure when the seat belt is used.

9. Combination Meter

- A DPF indicator light has been provided for the 1KD-FTV engine equipped Hong Kong package models.
- For the 1KD-FTV engine equipped Hong Kong package models, the water temperature threshold value that is used for one of the conditions to turn on the engine oil lower level warning light has been increased from 55°C to 60°C.
- For the 1KD-FTV engine equipped Hong Kong package models, a part of the system has been changed, including the change of the target to which the oil pressure terminal connected from the oil pressure switch to the engine ECU.

DPF Indicator Light

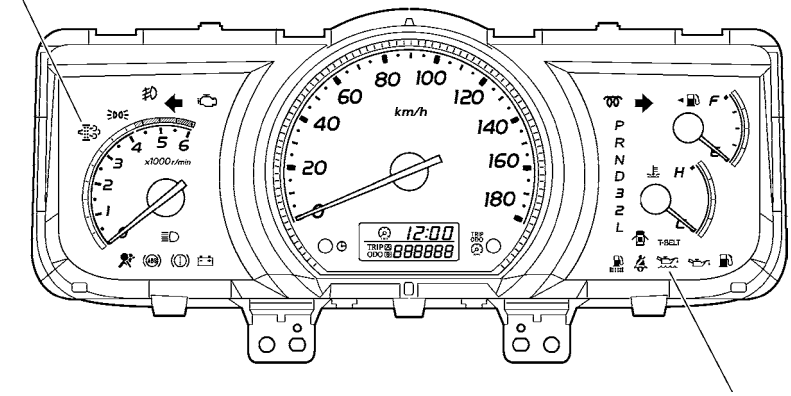

Engine Oil Lower Level Warning Light

04Z5MO05Z

10. Audio

- The provision of audio head unit with cassette player has been discontinued.
- Along with the above discontinuation, audio head unit with CD player is available as an option for all G.C.C. Countries models.

11. Battery

The battery has been changed from 105D31RB (60AH) to 85D26R (55AH) for the 1KD-FTV engine equipped Hong Kong package models.