INTRODUCTION

OUTLINE OF NEW FEATURES

The following changes have been made for the new HIACE.

1. Model Line-up

The newly added and discontinued models are shown in the table below.

Destination	Newly Added Model Code	Destination	Discontinued Model Code
Russia	KDH223L-LEMNYX	Vietnam	● TRH213L-JEMDKU ● TRH213L-JDMNKU ● KDH212L-JEMDYU

2. Exterior

The engine mark (2TR-FE engine models: VVT-i, 2KD-FTV engine models: D-4D) that was attached on the center pillar for the previous models has been abolished.*

*: Engine mark attached models

3. Engine


- Specifications for 2TR-FE engines for China package have been modified for compliance with EURO V regulations from EURO IV regulations.
- A new specification 1KD-FTV engine that complies with the EURO IV C/D mode (Chassis Dynamo mode) regulations has been adopted for the models for Russia.

4. Brake

Rear brake specification for some models has been changed, as indicated in the table shown below.


Model			New Model	Previous Model
Vehicle Type			Commuter	←
Body Type			4-door, High Roof, Wide	←
Wheel Base Type			Super Long	←
Gear Shift Type			5-Speed Manual	←
Destination			South Africa and Thailand and General*	←
Rear Brake Type			Leading-trailing Drum	←
Parking Brake Type			Leading-trailing Drum	Dual Mode Drum
Rear Brake	Lining Area	cm^2 ($in.^2$)	147 (22.78) × 2	121 (18.75) × 2
	Wheel Cylinder Diameter	mm (in.)	25.4 (1.0)	22.22 (0.87)
	Drum Inner Diameter	mm (in.)	295 (11.61)	254 (10.0)
Parking Brake	Type		Drum	←
	Drum Inner Diameter	mm (in.)	295 (11.61)	254 (10.0)

*: Except models for China package

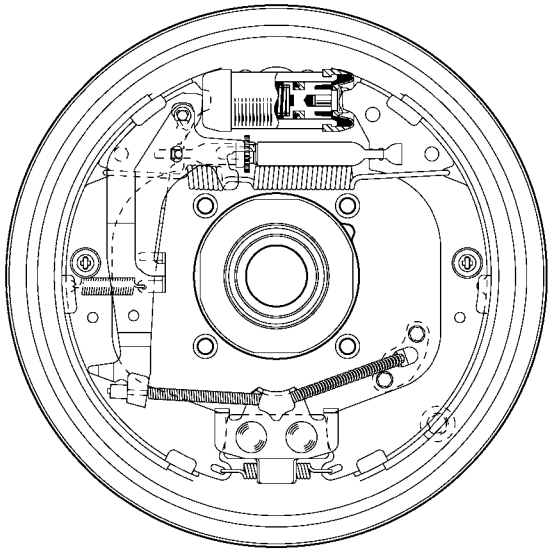

Front

New Model

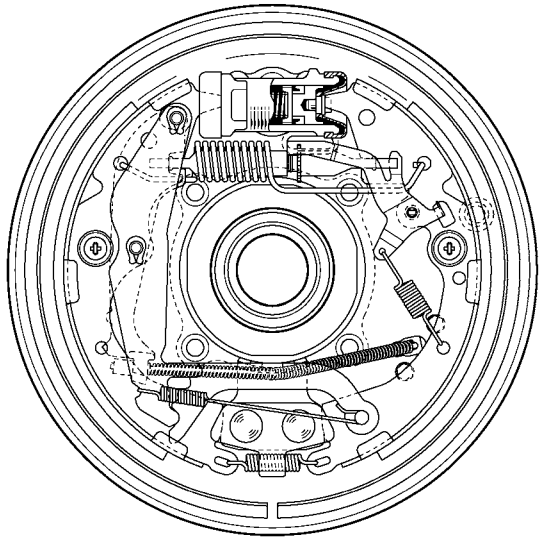

Front

Previous Model

04Z6MO01


5. Rear View Mirror

- The inner rear view mirror assembly, which consists of an automatic glare-resistant EC (Electrochromic) mirror and rear view monitor system display unit, has been provided.*
- For details about the automatic glare-resistant EC mirror, refer to page 19.
- For details about the rear view monitor system, refer to page 30.

*: Models with automatic glare-resistant EC mirror and rear view monitor system


6. Seat

- The new DX grade of super long wheel base models for Vietnam package uses 16 (3+3+3+3+4) seat layout.
- Rear seats with head rests are available as an option for the models for Vietnam package.

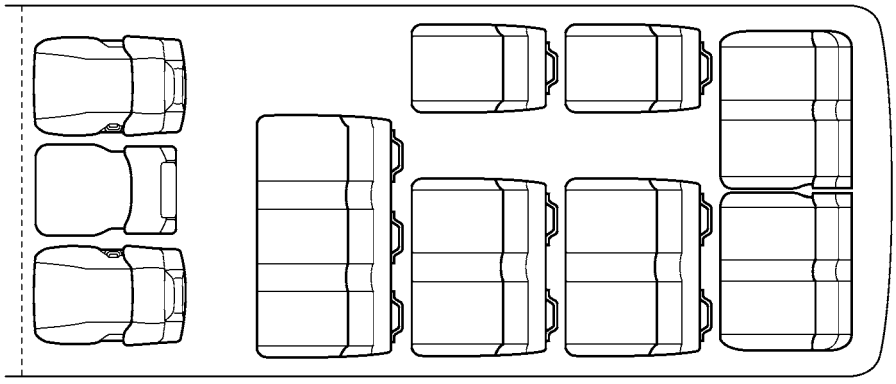

04Z6BO02

- The front three-seater with all separate seats LHD models for Vietnam package use L-shaped headrest (front seat headrest assembly) to achieve excellent rearward visibility.

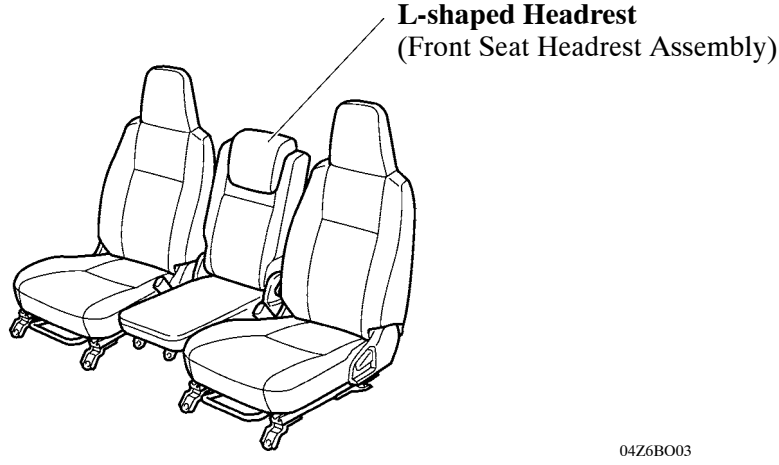

04Z6BO03

- Vinyl leather seat covers are provided as standard equipment on the models for Indonesia package.
- The front three-seater with integrated front passenger and center seats RHD models are provided as standard equipment on the models for Indonesia package.
- Fabric seat covers are provided on the high grade of models for Indonesia package.
- The front three-seater with all separate seats RHD models are provided on the high grade of models for Indonesia package.

7. Lighting

- A timer feature has been added to the illuminated entry system.
- The fog light assembly has been made larger.
- A new design has been adopted for the center stop light assembly.
- For details of the lighting, see page 21.

8. Combination Meter

A speed warning system is no longer included with the Nigeria package.

9. Air Conditioner

An air conditioner unit with a hot-gas power heater and PTC heater has been adopted in 1KD-FTV equipped vehicles bound for Russia. For details of the air conditioner, see page 24.


10. Rear View Monitor System

The rear view monitor system* in which the image from the camera is shown on the display located in the inner rear view mirror assembly. For details, see page 30.


*: Models except for G.C.C. Countries, Thailand, Malaysia and China package.

11. Wireless Door Lock Remote Control System

The design of the transmitter has been changed as follows.

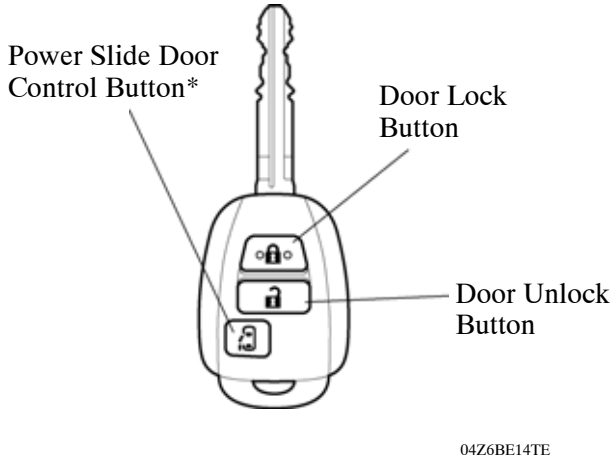

New Model

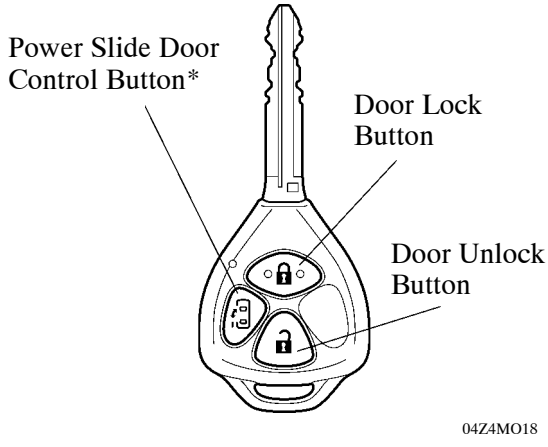

Previous Model

*: Models with power slide door system

12. Slide Door

A protector plate has been provided for the slide door lock assembly rear of the manual operation type slide doors.

13. Power Slide Door System

A halfway stop control is added to the power slide door system*. This will stop the operation if reverse operations are performed three times while operating the power slide door or jamming is detected twice.

*: Models for Australia (including New Zealand package and Singapore package) and Thailand.

14. Battery

Two 85D26R (55AH) batteries are provided as standard for the 1KD-FTV engine models for Russia.

15. Escape Hammer and Buzzer

The shape and set quantity of back window glass hammer assembles for the China package has been modified. New labels have also been adopted for the escape hammer buzzer and back window glass hammer assembly. For details of the escape hammer and buzzer, see page 36.