


BODY DIMENSION DRAWINGS
ENGINE COMPARTMENT


(Three-Dimensional Distance)

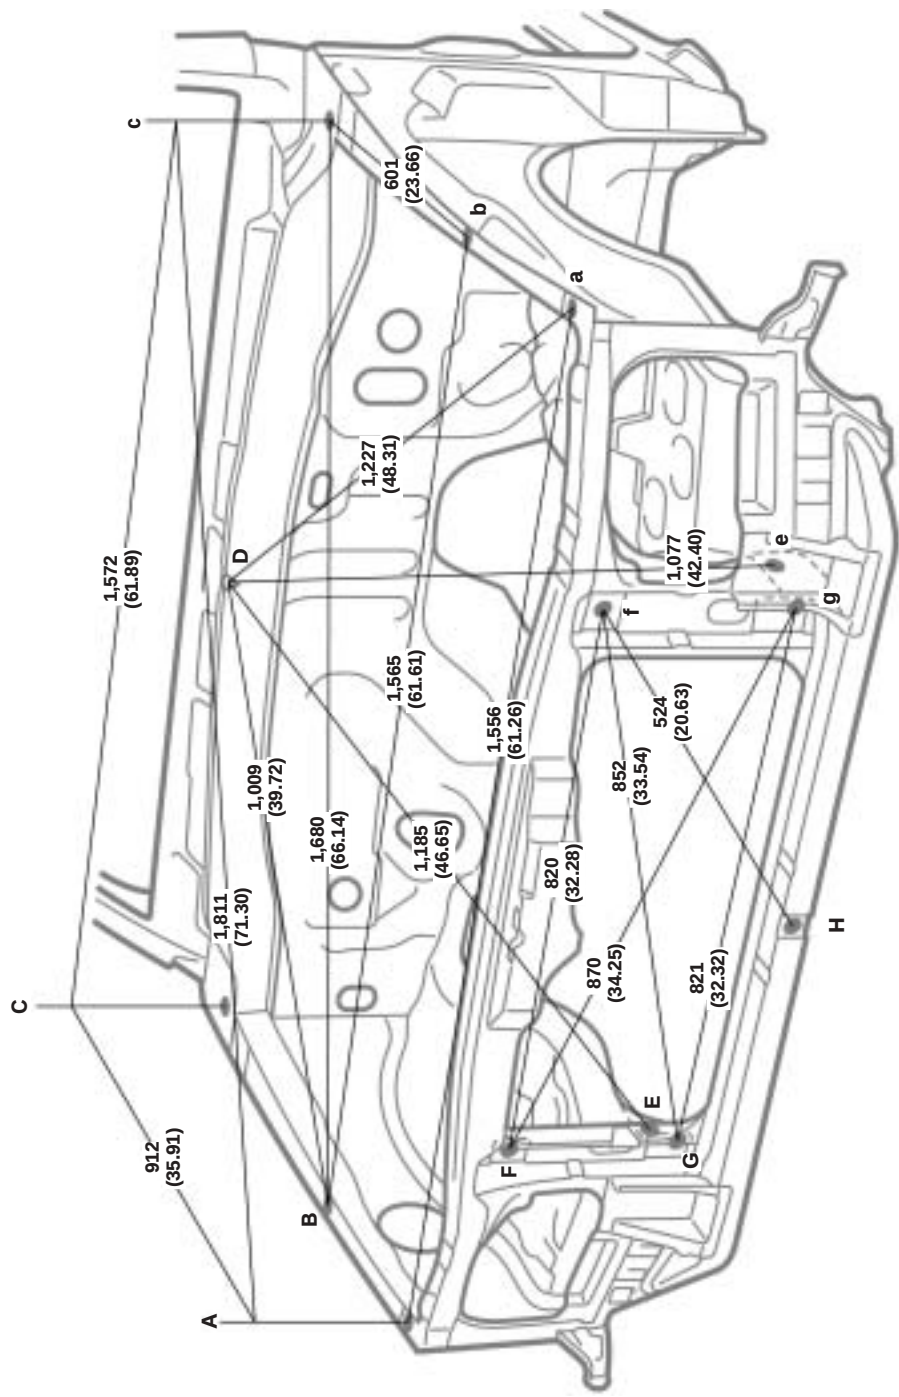

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).


Symbol	Name	Hole dia.	Symbol	Name	mm (in.)
A, a	Front fender installation nut	6 (0.24) nut	F, f	Radiator installation hole	12 (0.47)
B, b	Front fender installation nut	6 (0.24) nut	G	Radiator installation hole	9 (0.35)
C, c	Front fender installation nut	6 (0.24) nut	g	Radiator installation hole	11 x 9 (0.43 x 0.35)
D	Cowl top panel vehicle center mark	—	H	Hood lock support installation nut	6 (0.24) nut
E, e	Front fender apron standard hole	10 (0.39)	—	—	—

BODY OPENING AREAS
(Side View-Front)

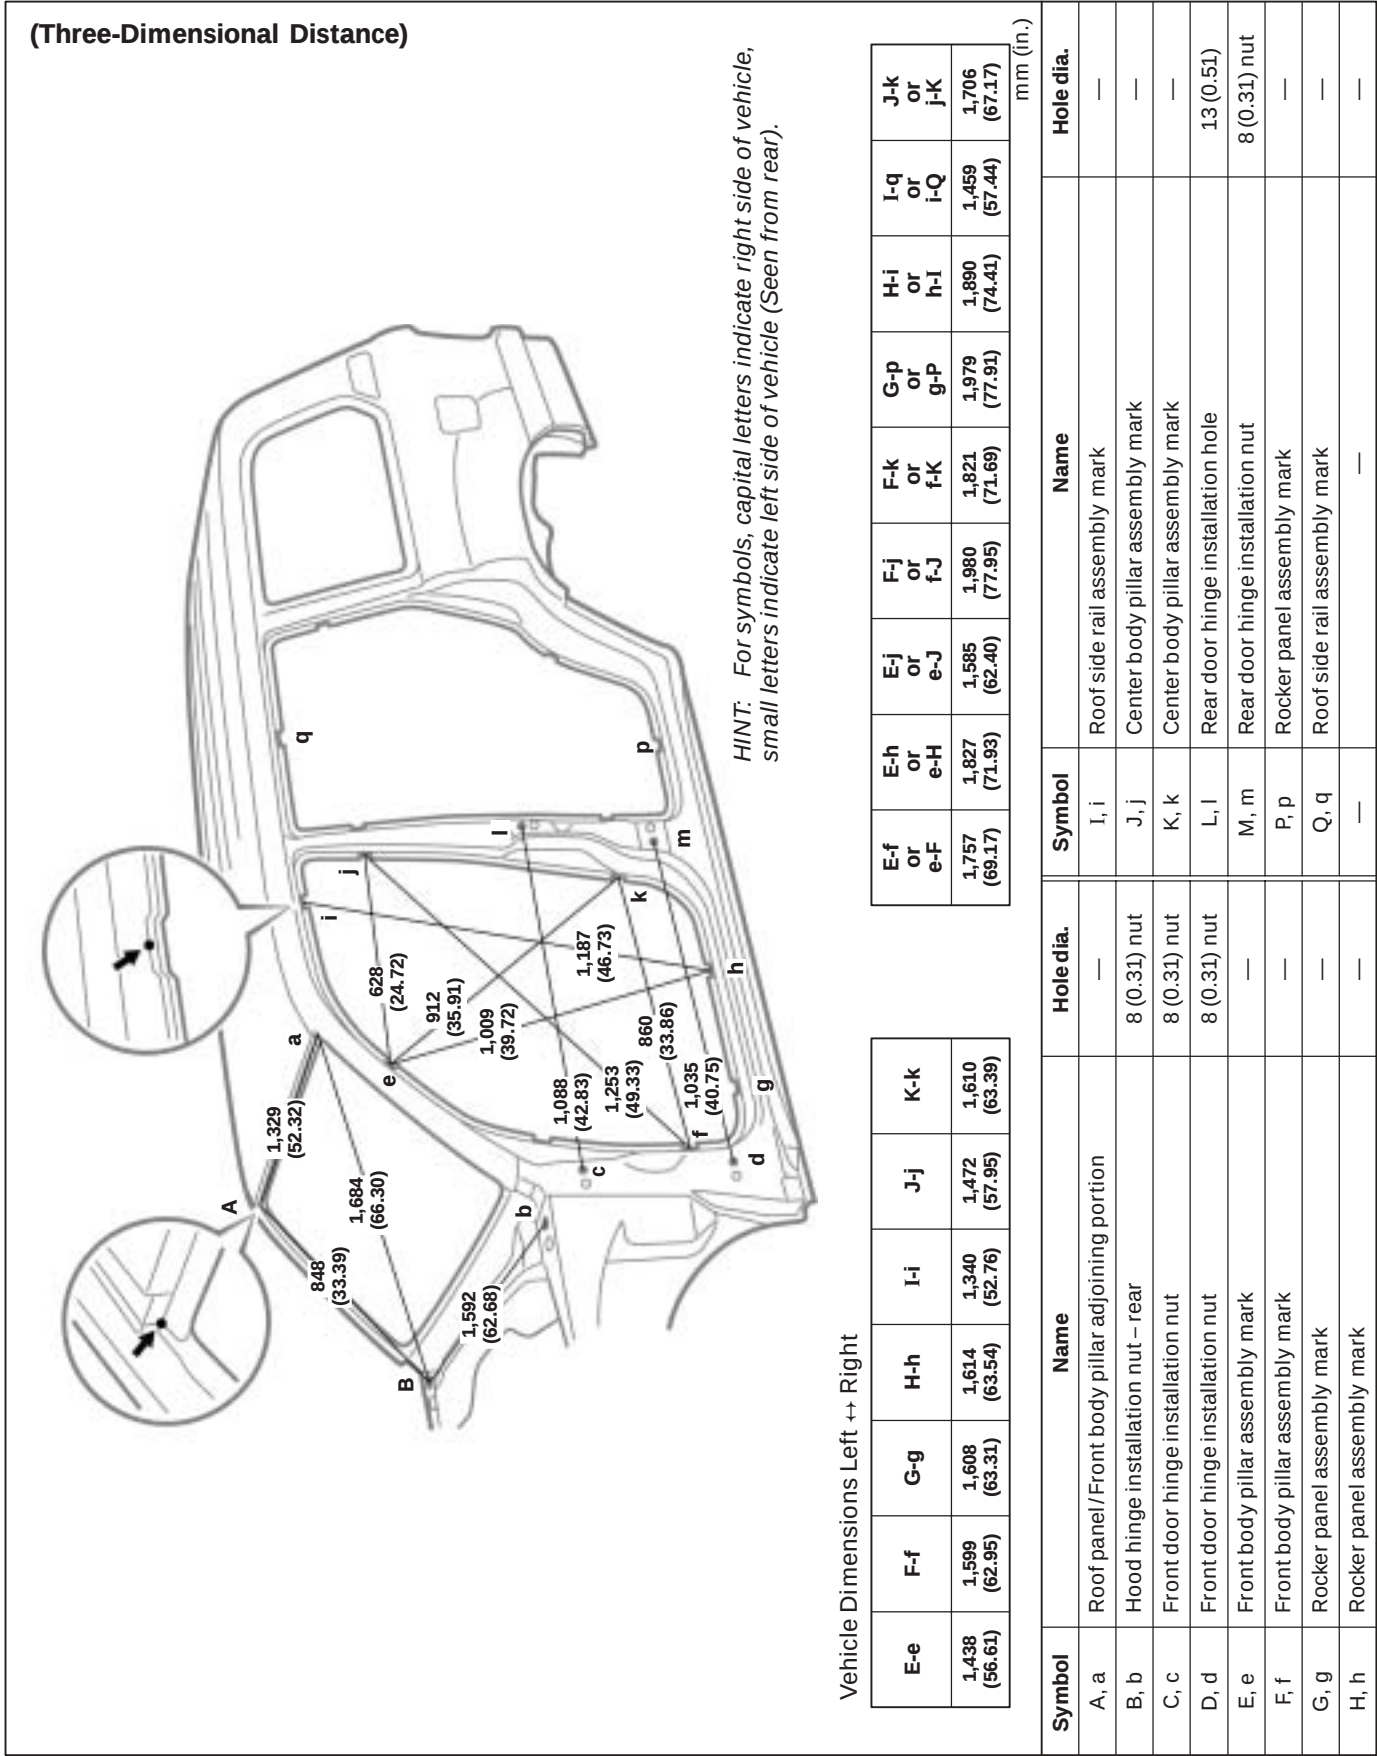

BODY OPENING AREAS
(Side View-Rear)

(Three-Dimensional Distance)

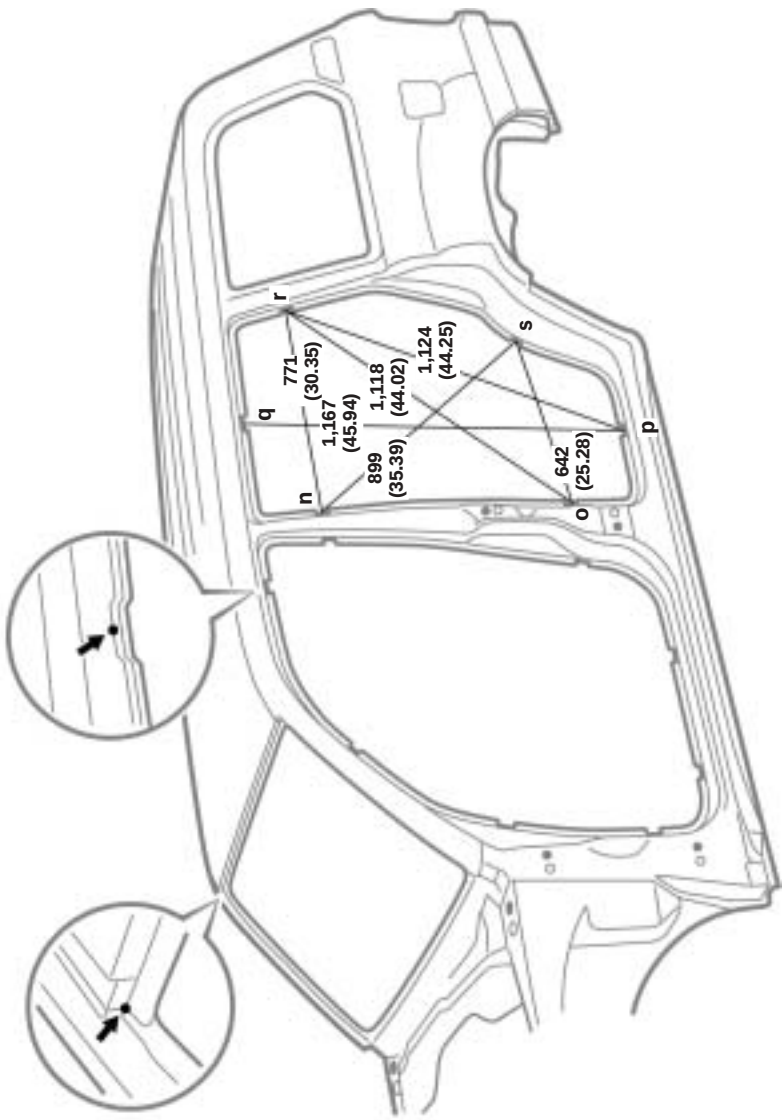

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right


N-n	O-o	P-p	Q-q	R-r	S-s
1,472 (57.95)	1,613 (63.50)	1,619 (63.74)	1,330 (52.36)	1,442 (56.77)	1,607 (63.27)

N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
1,649 (64.92)	1,782 (70.16)	1,734 (68.27)	1,875 (73.82)	1,692 (66.61)

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
N, n	Center body pillar assembly mark	—	Q, q	Roof side rail assembly mark	—
O, o	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
P, p	Rocker panel assembly mark	—	S, s	Quarter panel assembly mark	—

BODY OPENING AREAS
(Rear View: Lift-Up Type)

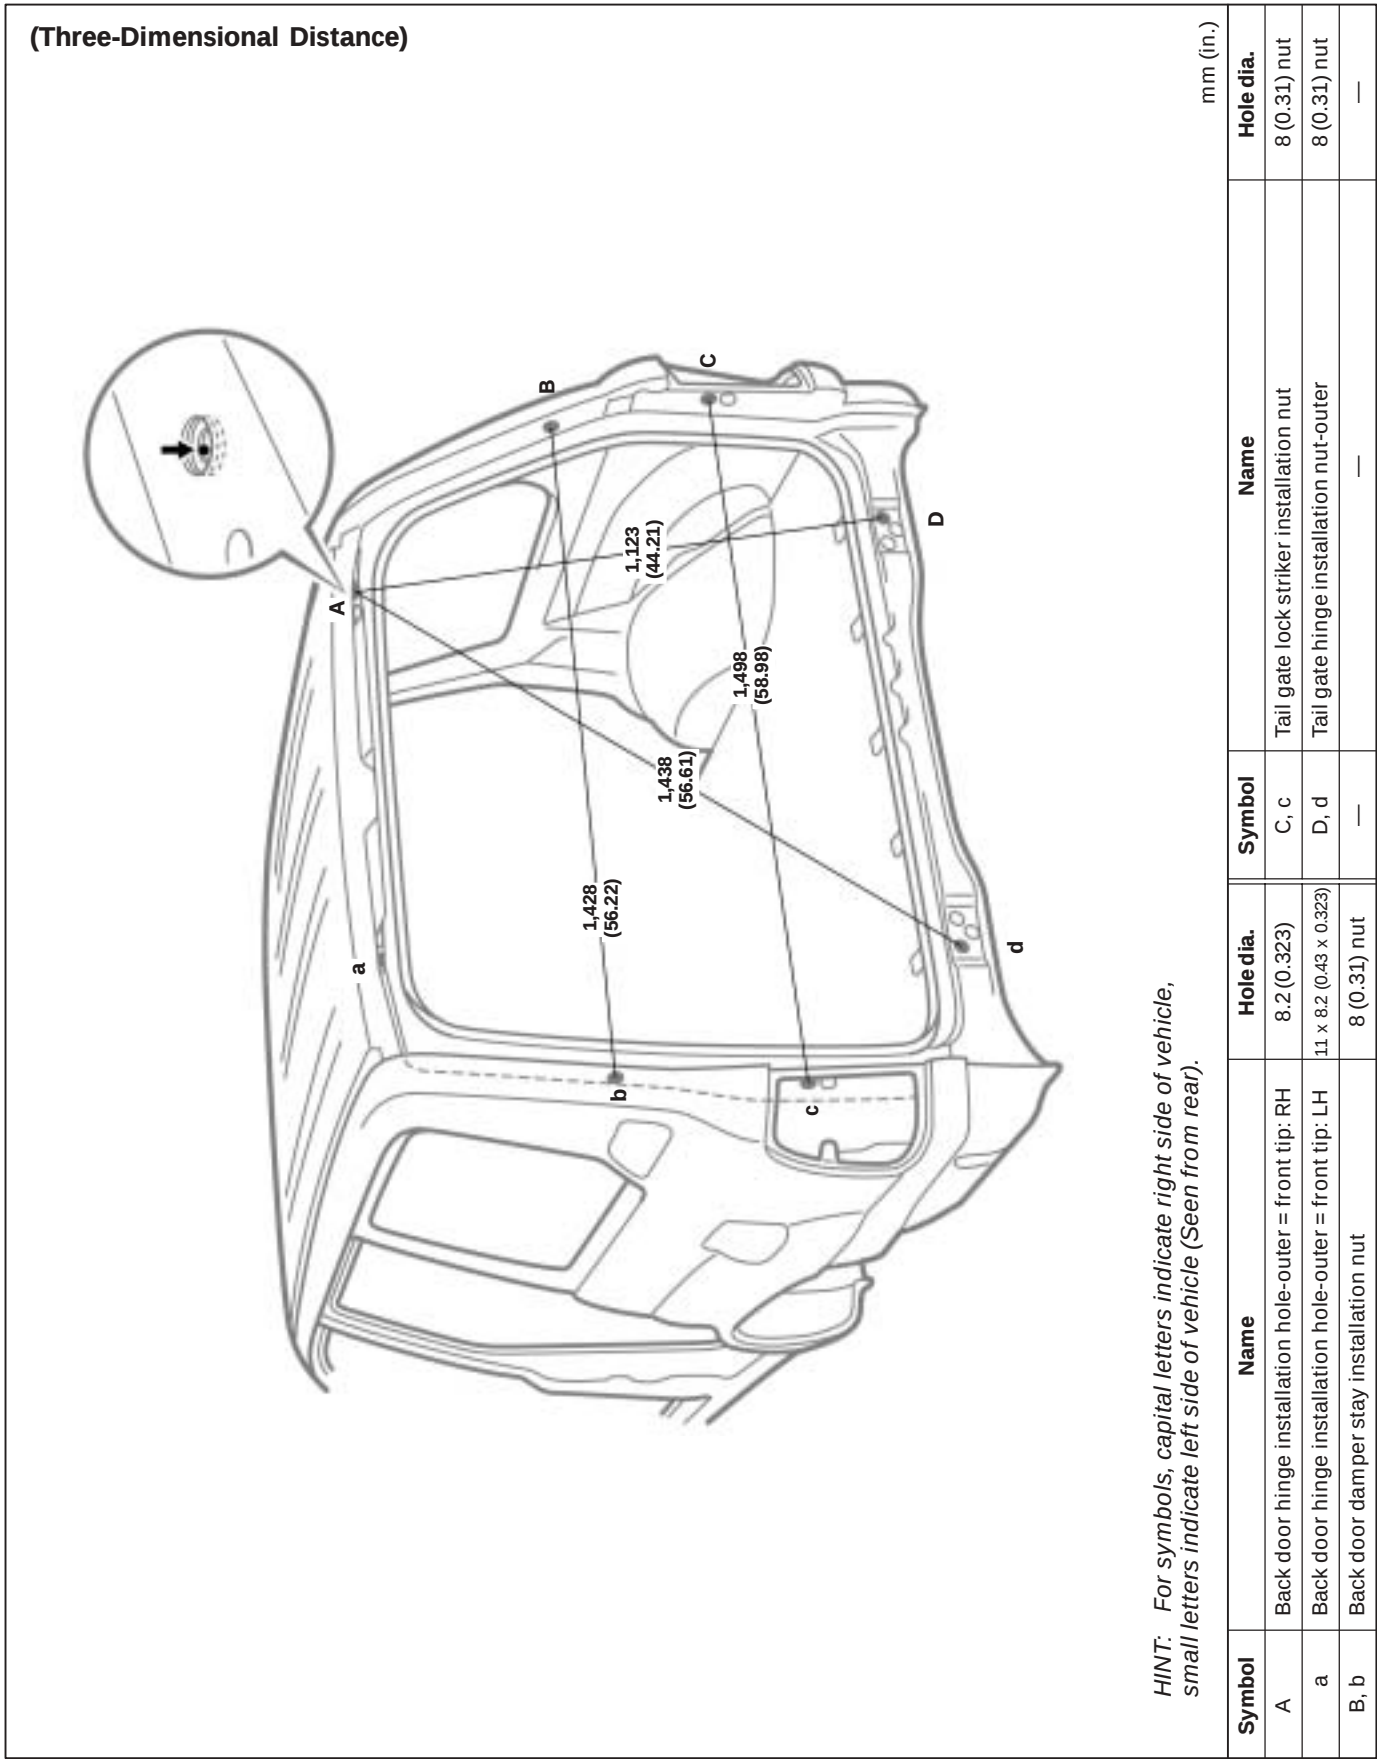

BODY OPENING AREAS
(Rear View: Swing Type)


(Three-Dimensional Distance)

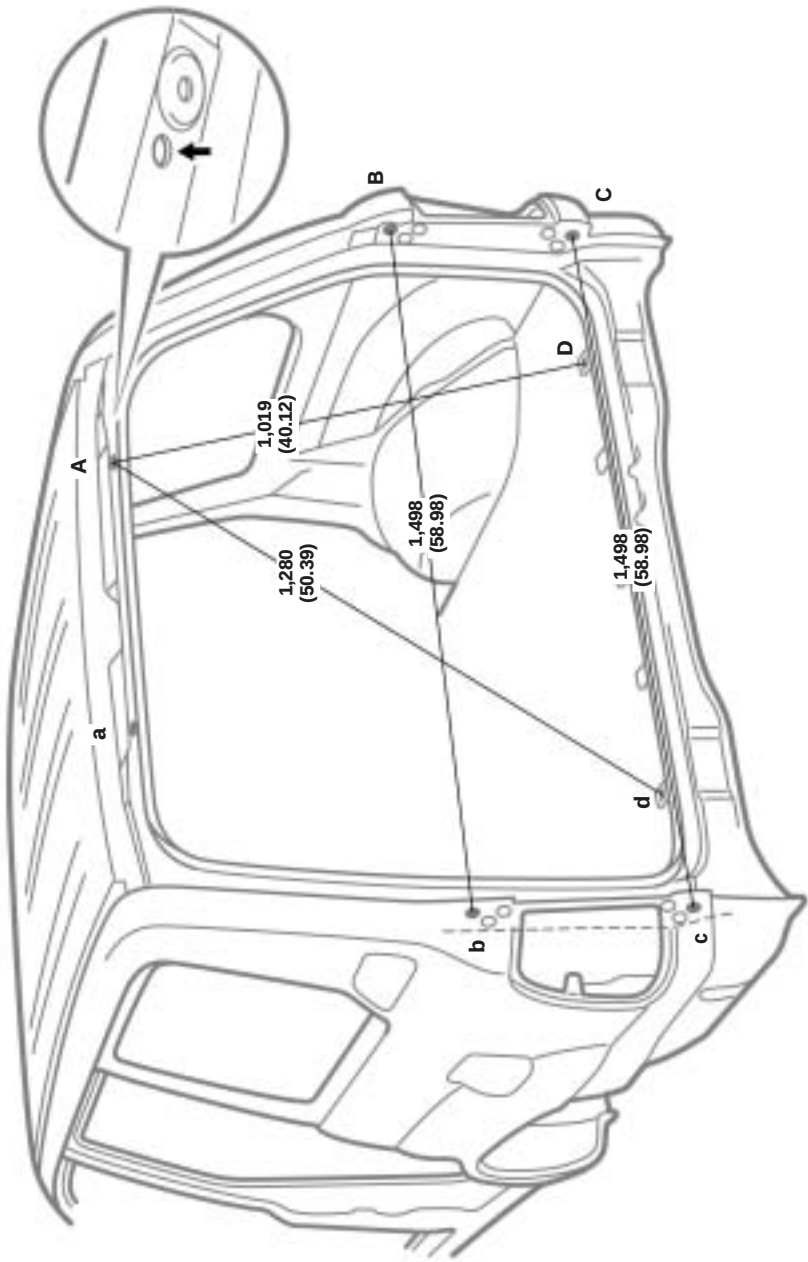

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

		mm (in.)	
Symbol	Name	Hole dia.	Hole dia.
A, a	Back door opening frame standard hole	10 (0.39)	8 (0.31) nut
B, b	Back door hinge installation nut-upper	8 (0.31) nut	12.5 x 8.5 (0.492 x 0.335)
	Back door hinge installation nut-lower		
	Rear floor finish plate installation hole		


FRAME DIMENSION
UZJ100 series · HDJ100, 101 series · FZJ100 series

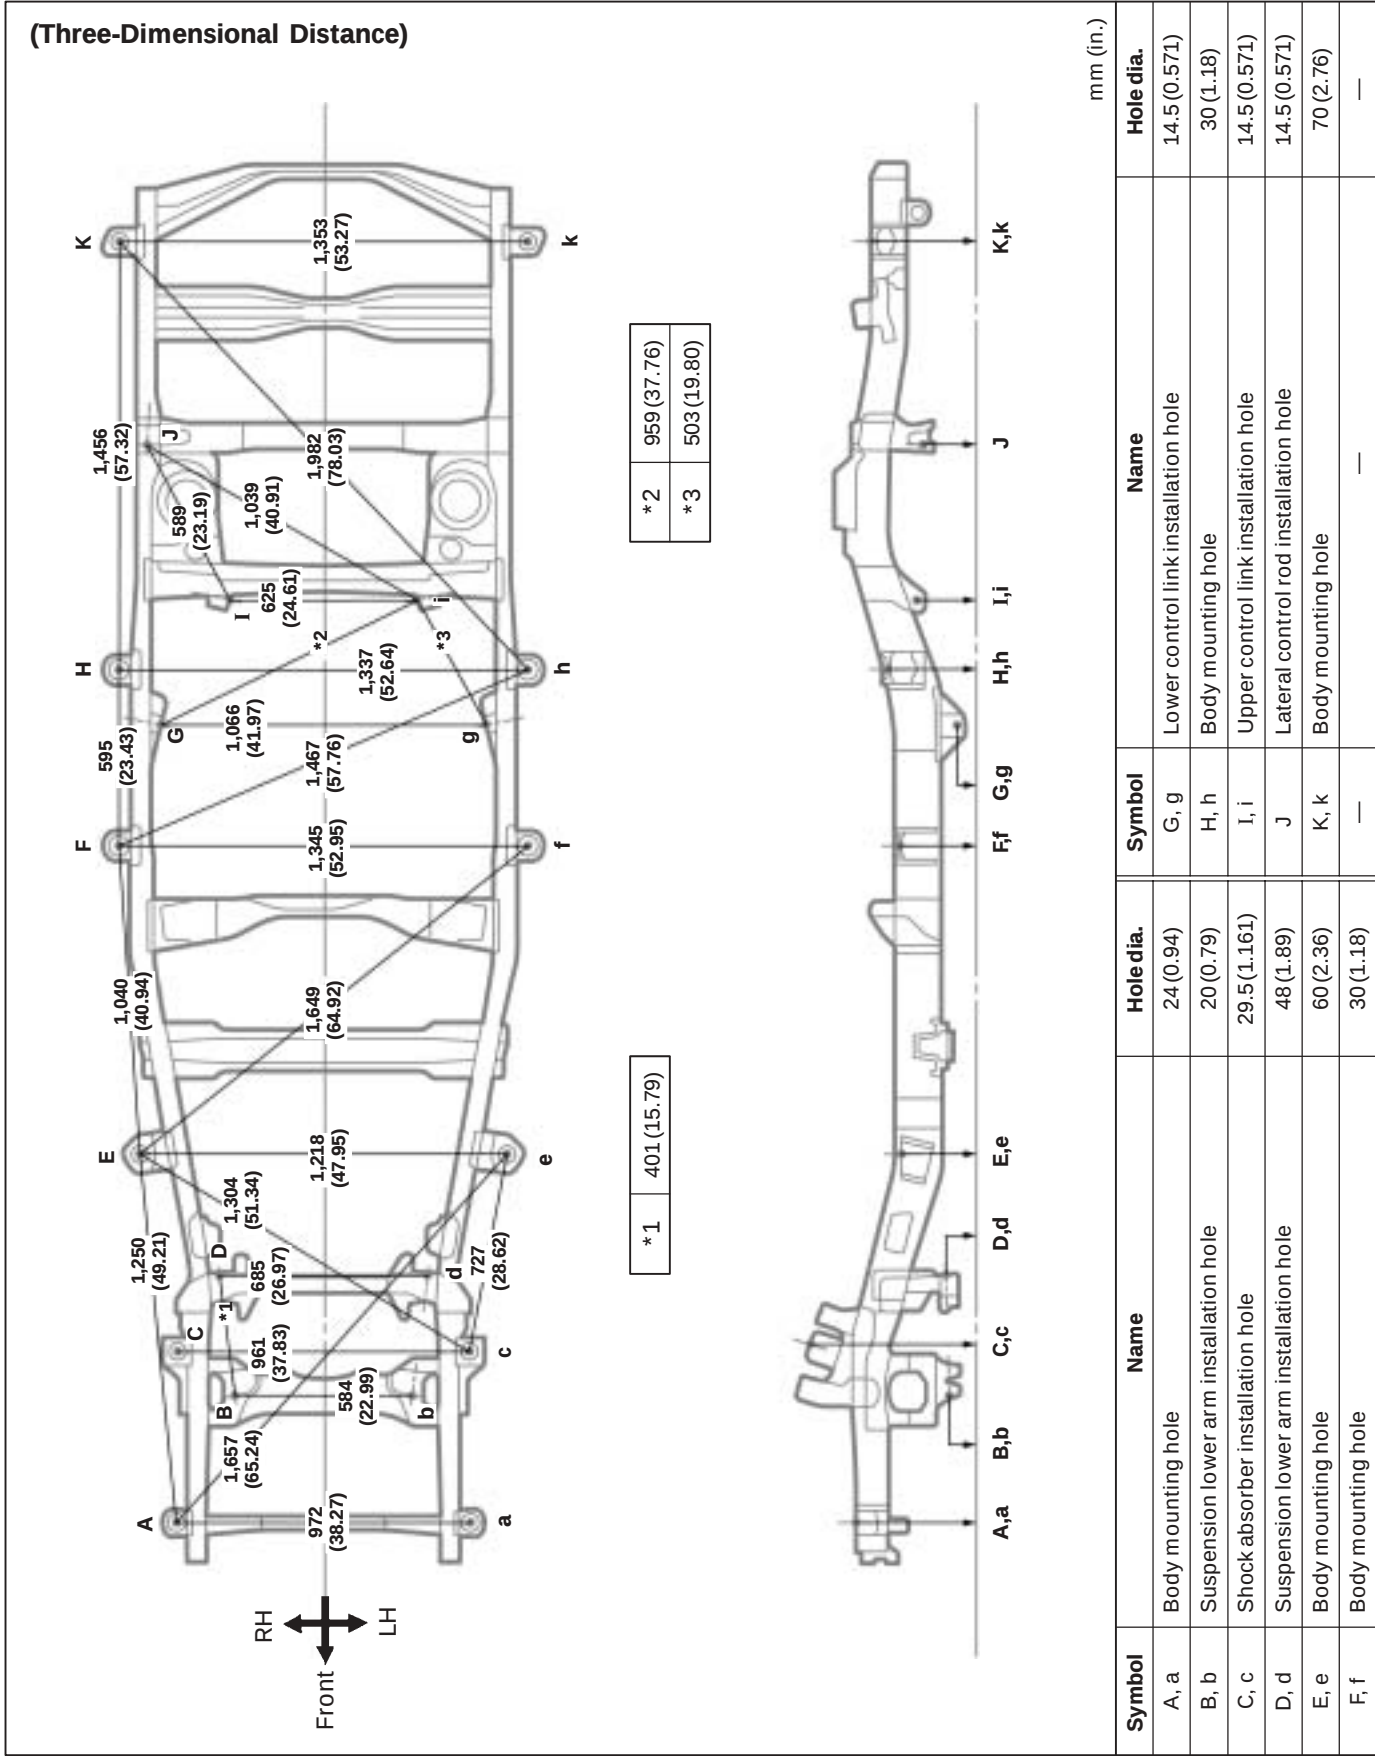


FRAME DIMENSION

UZJ100 series · HDJ100, 101 series · FZJ100 series
(Cont'd)

(Two-Dimensional Distance)

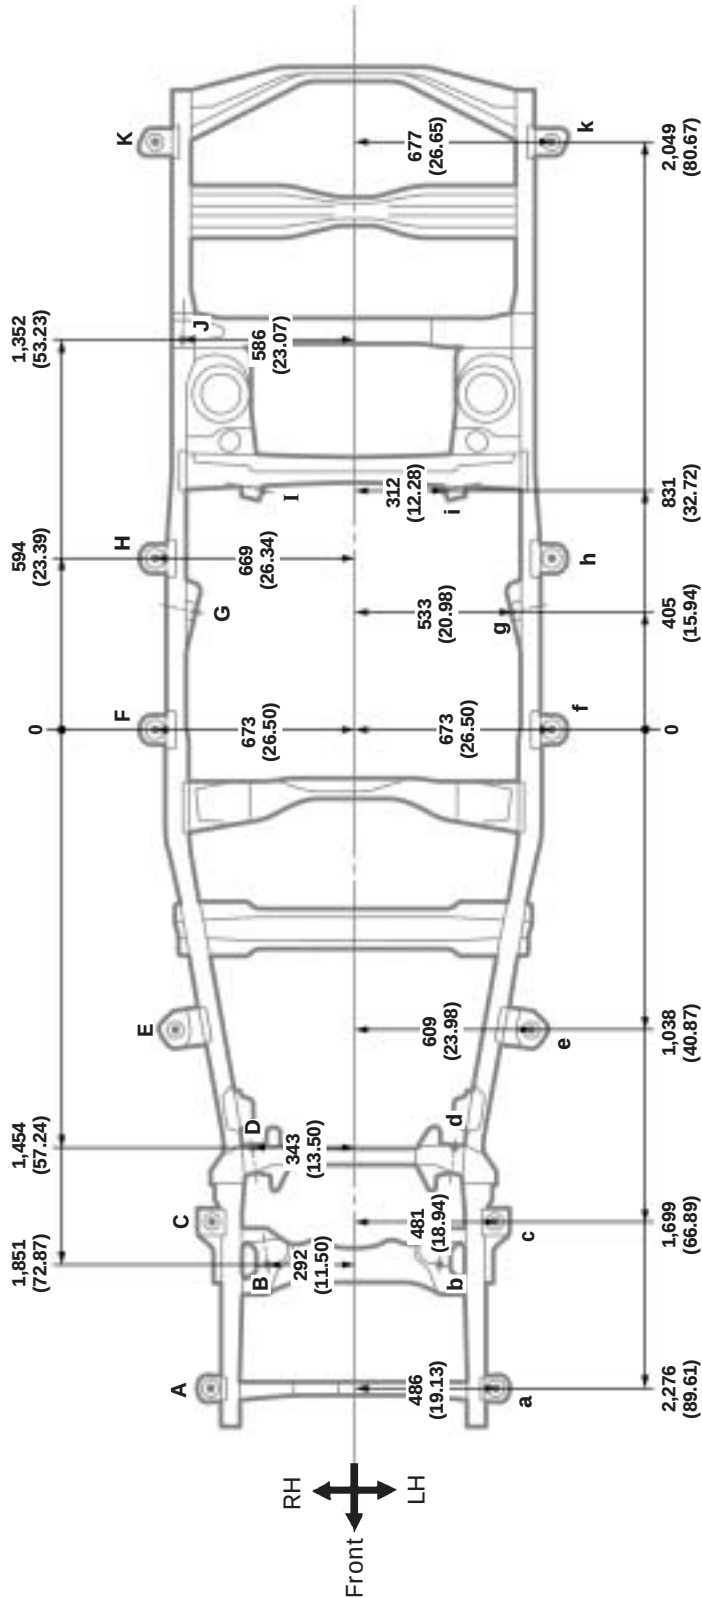


Wheel Base 2,850 (112.20)

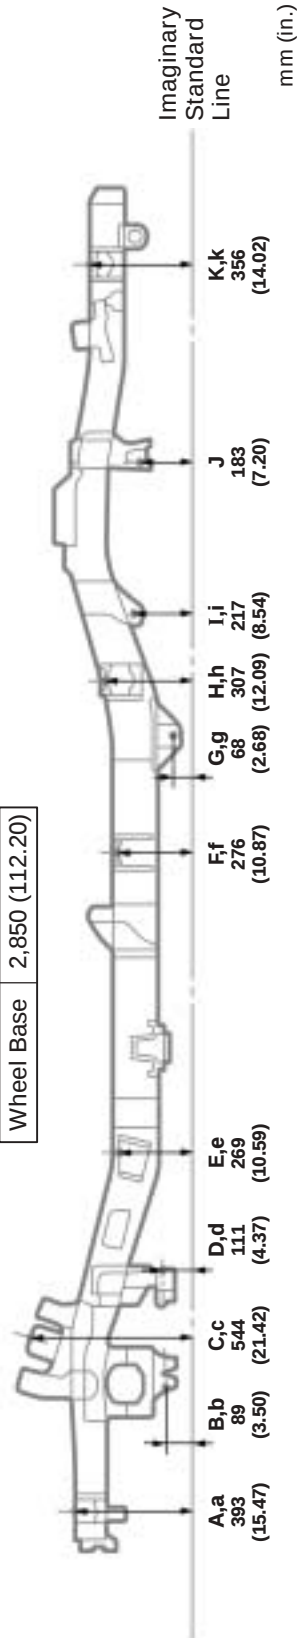

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	G, g	Lower control link installation hole	14.5 (0.571)
B, b	Suspension lower arm installation hole	20 (0.79)	H, h	Body mounting hole	30 (1.18)
C, c	Shock absorber installation hole	29.5 (1.161)	I, i	Upper control link installation hole	14.5 (0.571)
D, d	Suspension lower arm installation hole	48 (1.89)	J	Lateral control rod installation hole	14.5 (0.571)
E, e	Body mounting hole	60 (2.36)	K, k	Body mounting hole	70 (2.76)
F, f	Body mounting hole	30 (1.18)	—	—	—



FRAME DIMENSION
FZJ105 series (RHD) · HZJ105 series (RHD)

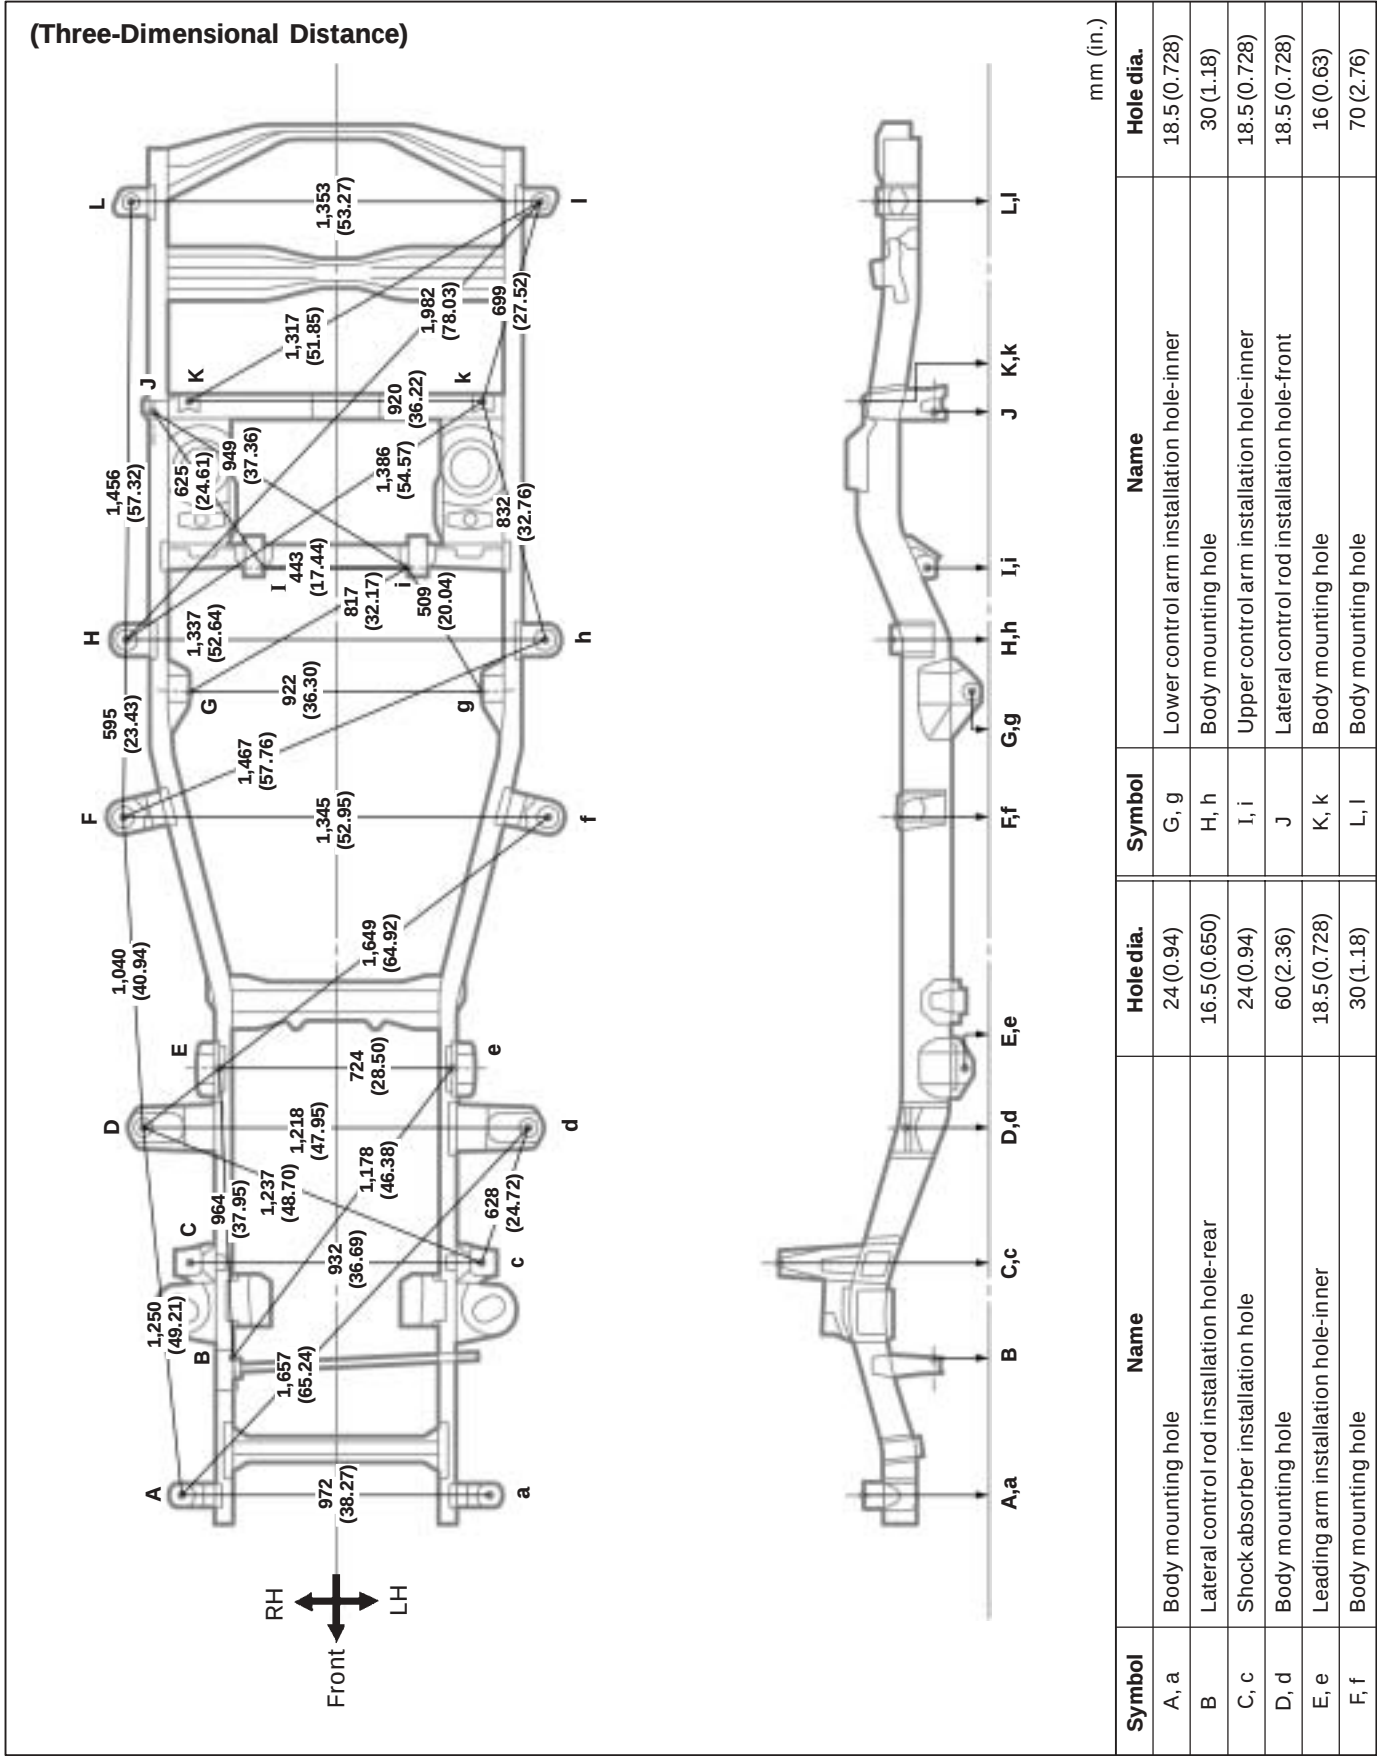

FRAME DIMENSION


FZJ105 series (RHD) · HZJ105 series (RHD) (Cont'd)

(Two-Dimensional Distance)

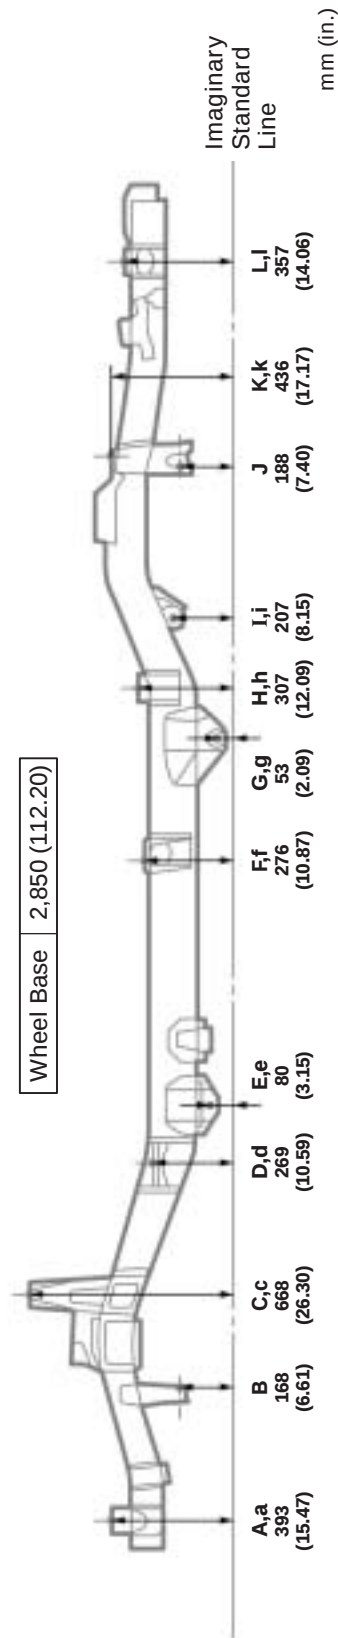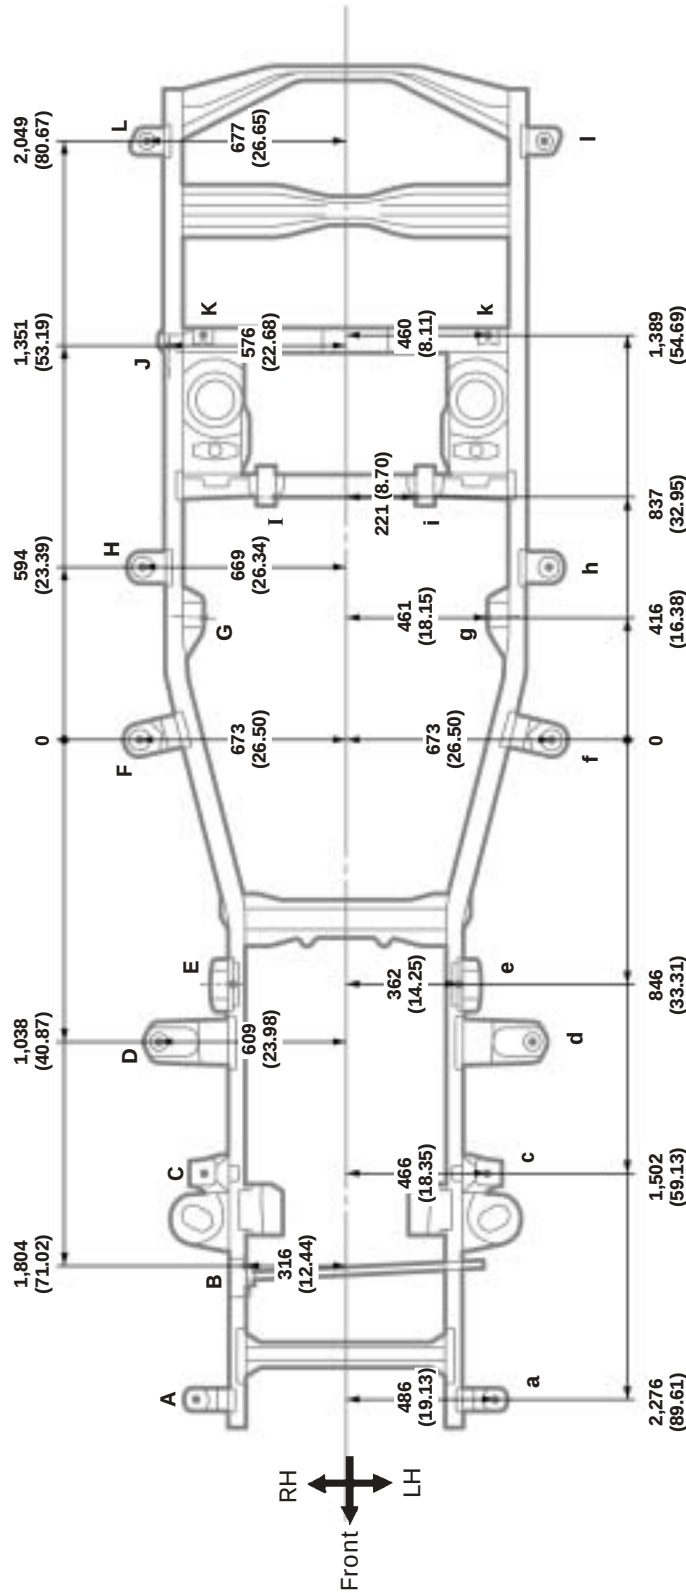

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	25 (0.94)	G, g	Lower control arm installation hole-inner	18.5 (0.728)
B	Lateral control rod installation hole-rear	16.5 (0.650)	H, h	Body mounting hole	30 (1.18)
C, c	Shock absorber installation hole	24 (0.94)	I, i	Upper control arm installation hole-inner	18.5 (0.728)
D, d	Body mounting hole	60 (2.36)	J	Lateral control rod installation hole-front	18.5 (0.728)
E, e	Leading arm installation hole-inner	18.5 (0.728)	K, k	Body mounting hole	16 (0.63)
F, f	Body mounting hole	30 (1.18)	L, l	Body mounting hole	70 (2.76)


FRAME DIMENSION
FZJ105 series (LHD) · HZJ105 series (LHD)

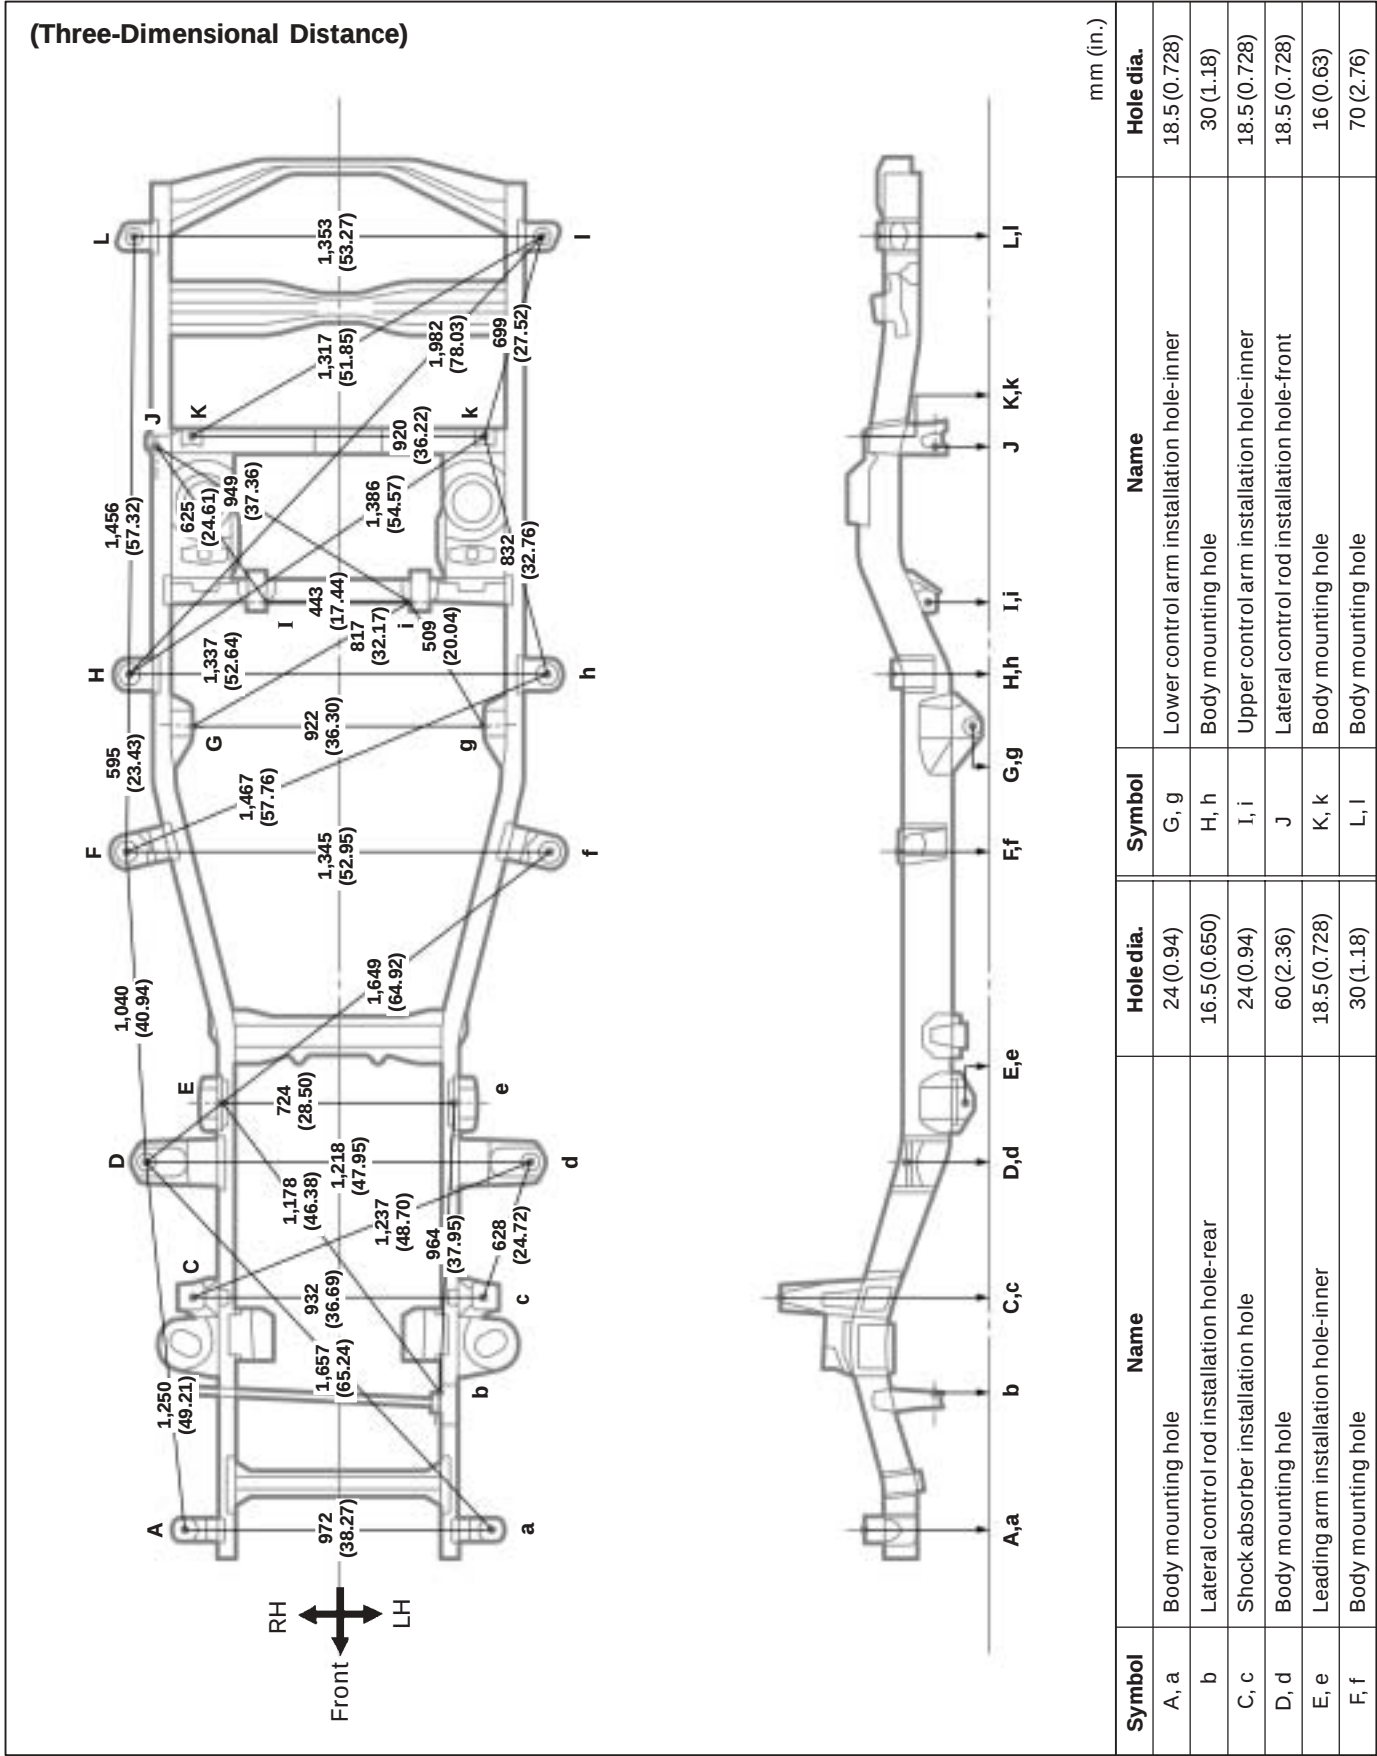

FRAME DIMENSION


FZJ105 series (LHD) · HZJ105 series (LHD) (Cont'd)

(Two-Dimensional Distance)

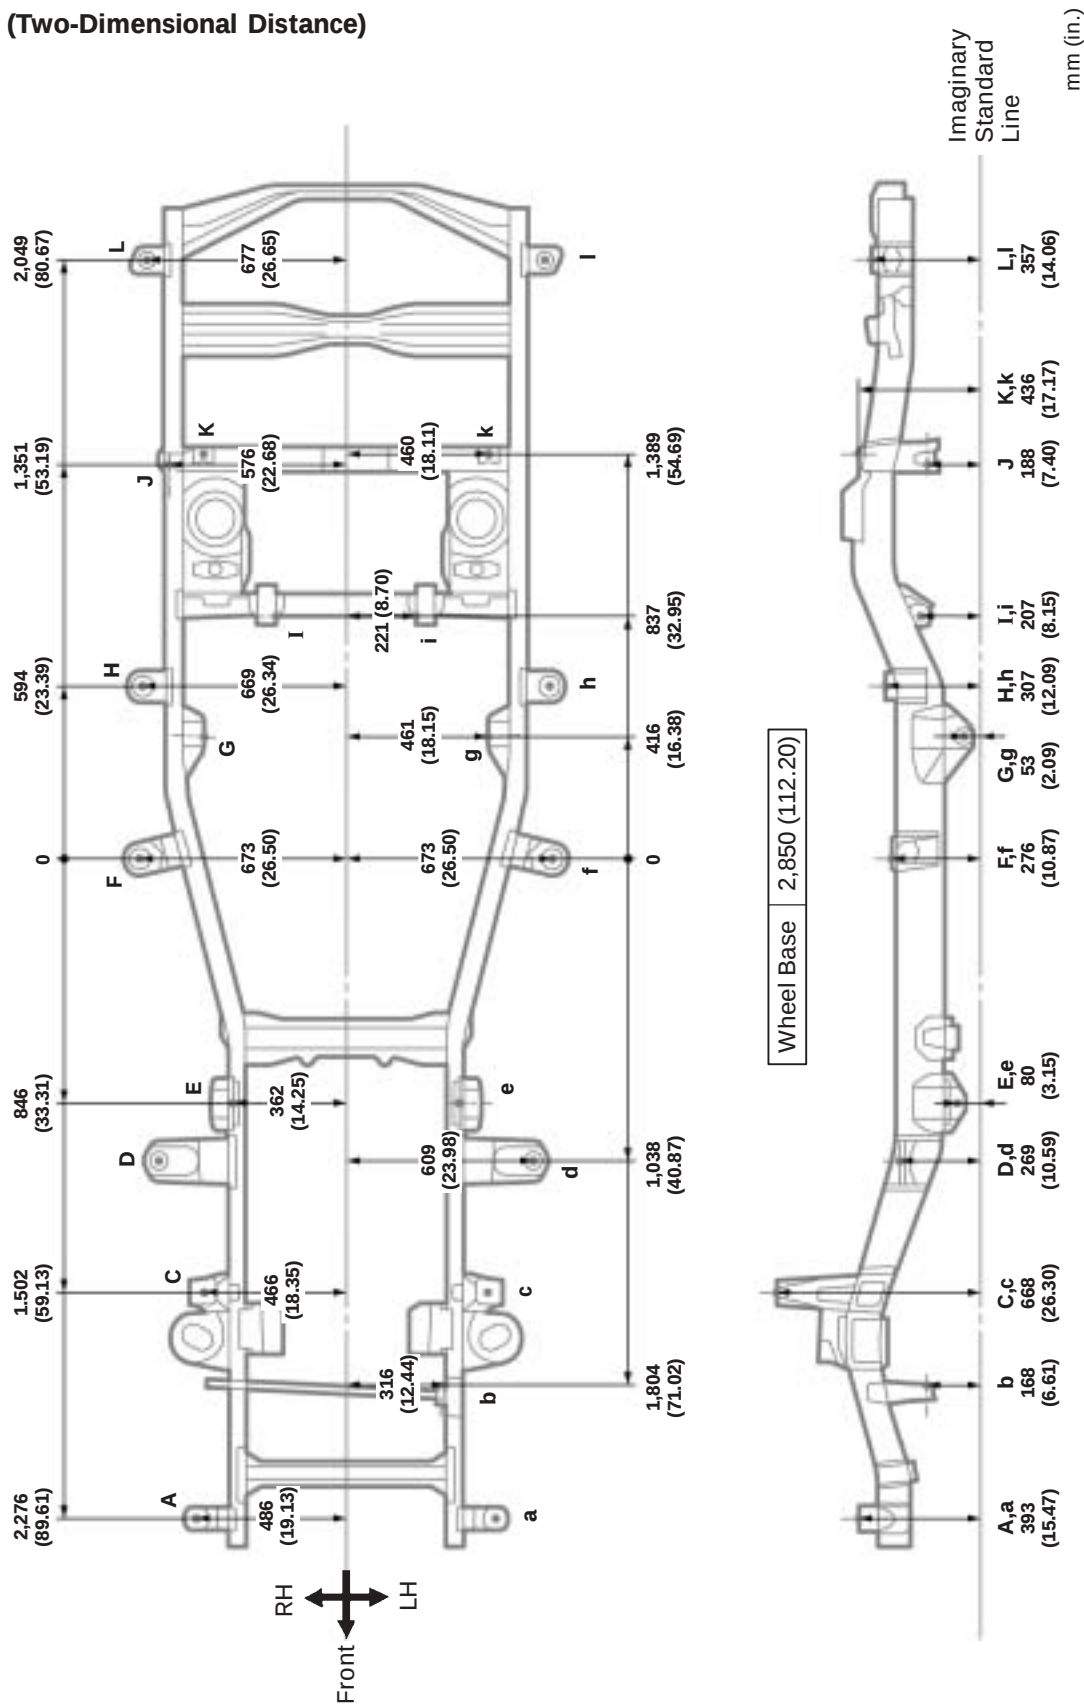


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	G, g	Lower control arm installation hole-inner	18.5 (0.728)
b	Lateral control rod installation hole-rear	16.5 (0.650)	H, h	Body mounting hole	30 (1.18)
C, c	Shock absorber installation hole	24 (0.94)	I, i	Upper control arm installation hole-inner	18.5 (0.728)
D, d	Body mounting hole	60 (2.36)	J	Lateral control rod installation hole-front	18.5 (0.728)
E, e	Leading arm installation hole-inner	18.5 (0.728)	K, k	Body mounting hole	16 (0.63)
F, f	Body mounting hole	30 (1.18)	L, l	Body mounting hole	70 (2.76)

FRAME DIMENSION – Upper Face
UZJ100 series · HDJ100, 101 series · FZJ100 series

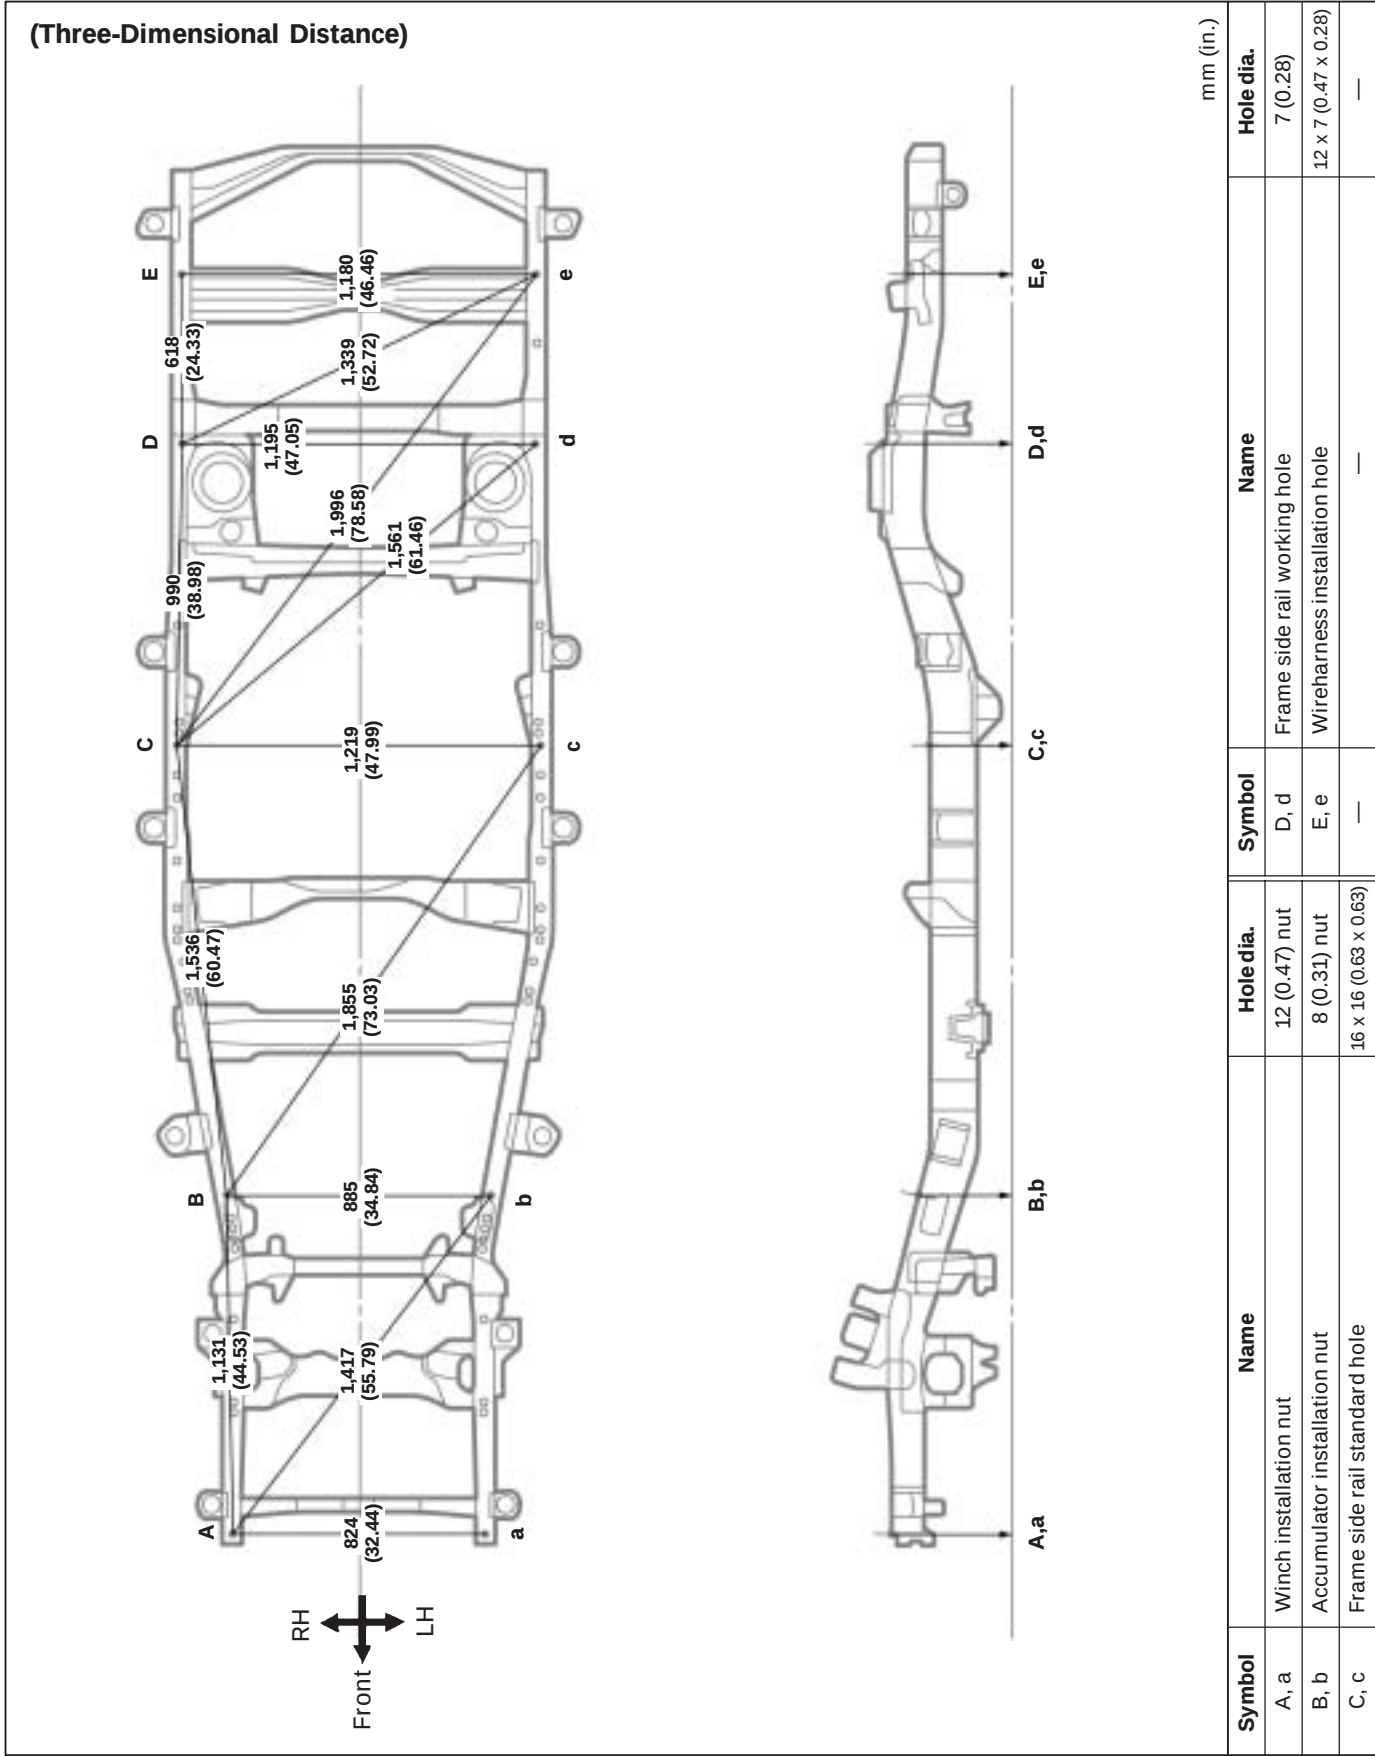

FRAME DIMENSION – Upper Face
UZJ100 series · HDJ100, 101 series · FZJ100 series
(Cont'd)


(Two-Dimensional Distance)

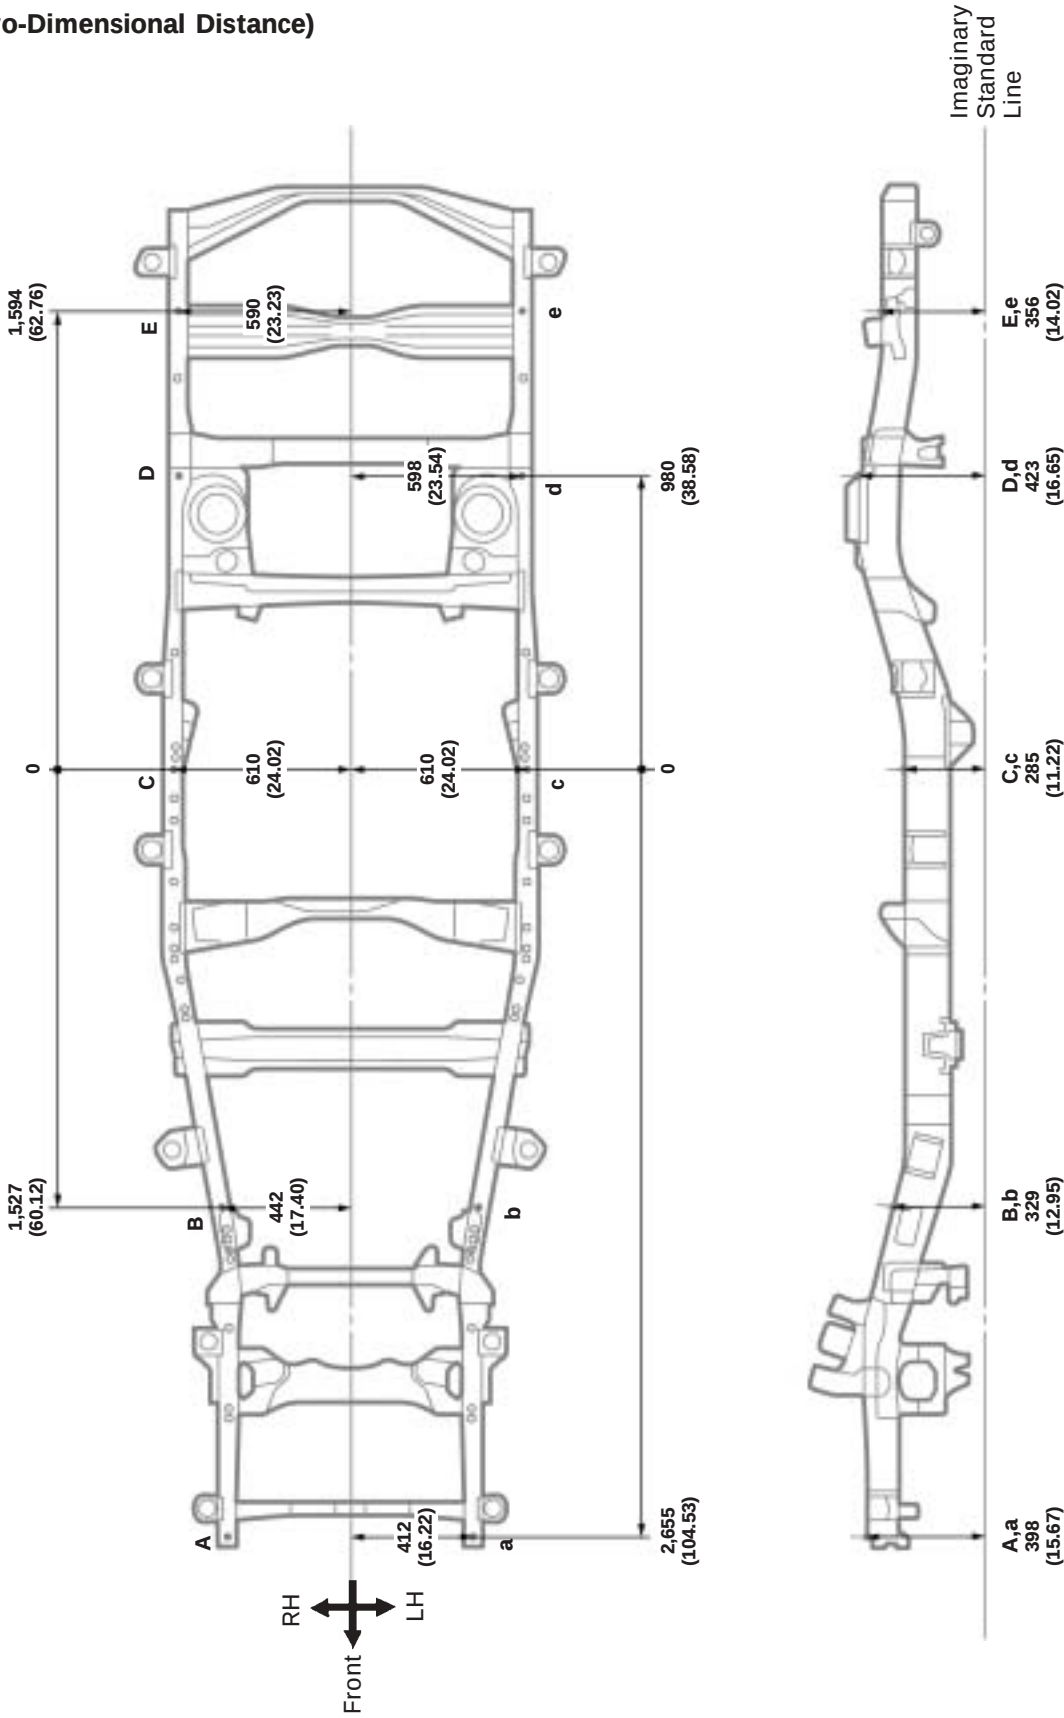

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Winch installation nut	12 (0.47) nut	D, d	Frame side rail working hole	7 (0.28)
B, b	Accumulator installation nut	8 (0.31) nut	E, e	Wireharness installation hole	12 x 7 (0.47 x 0.28)
C, c	Frame side rail standard hole	16 x 16 (0.63 x 0.63)	—	—	—


FRAME DIMENSION – Lower Face

UZJ100 series · HDJ100, 101 series · FZJ100 series

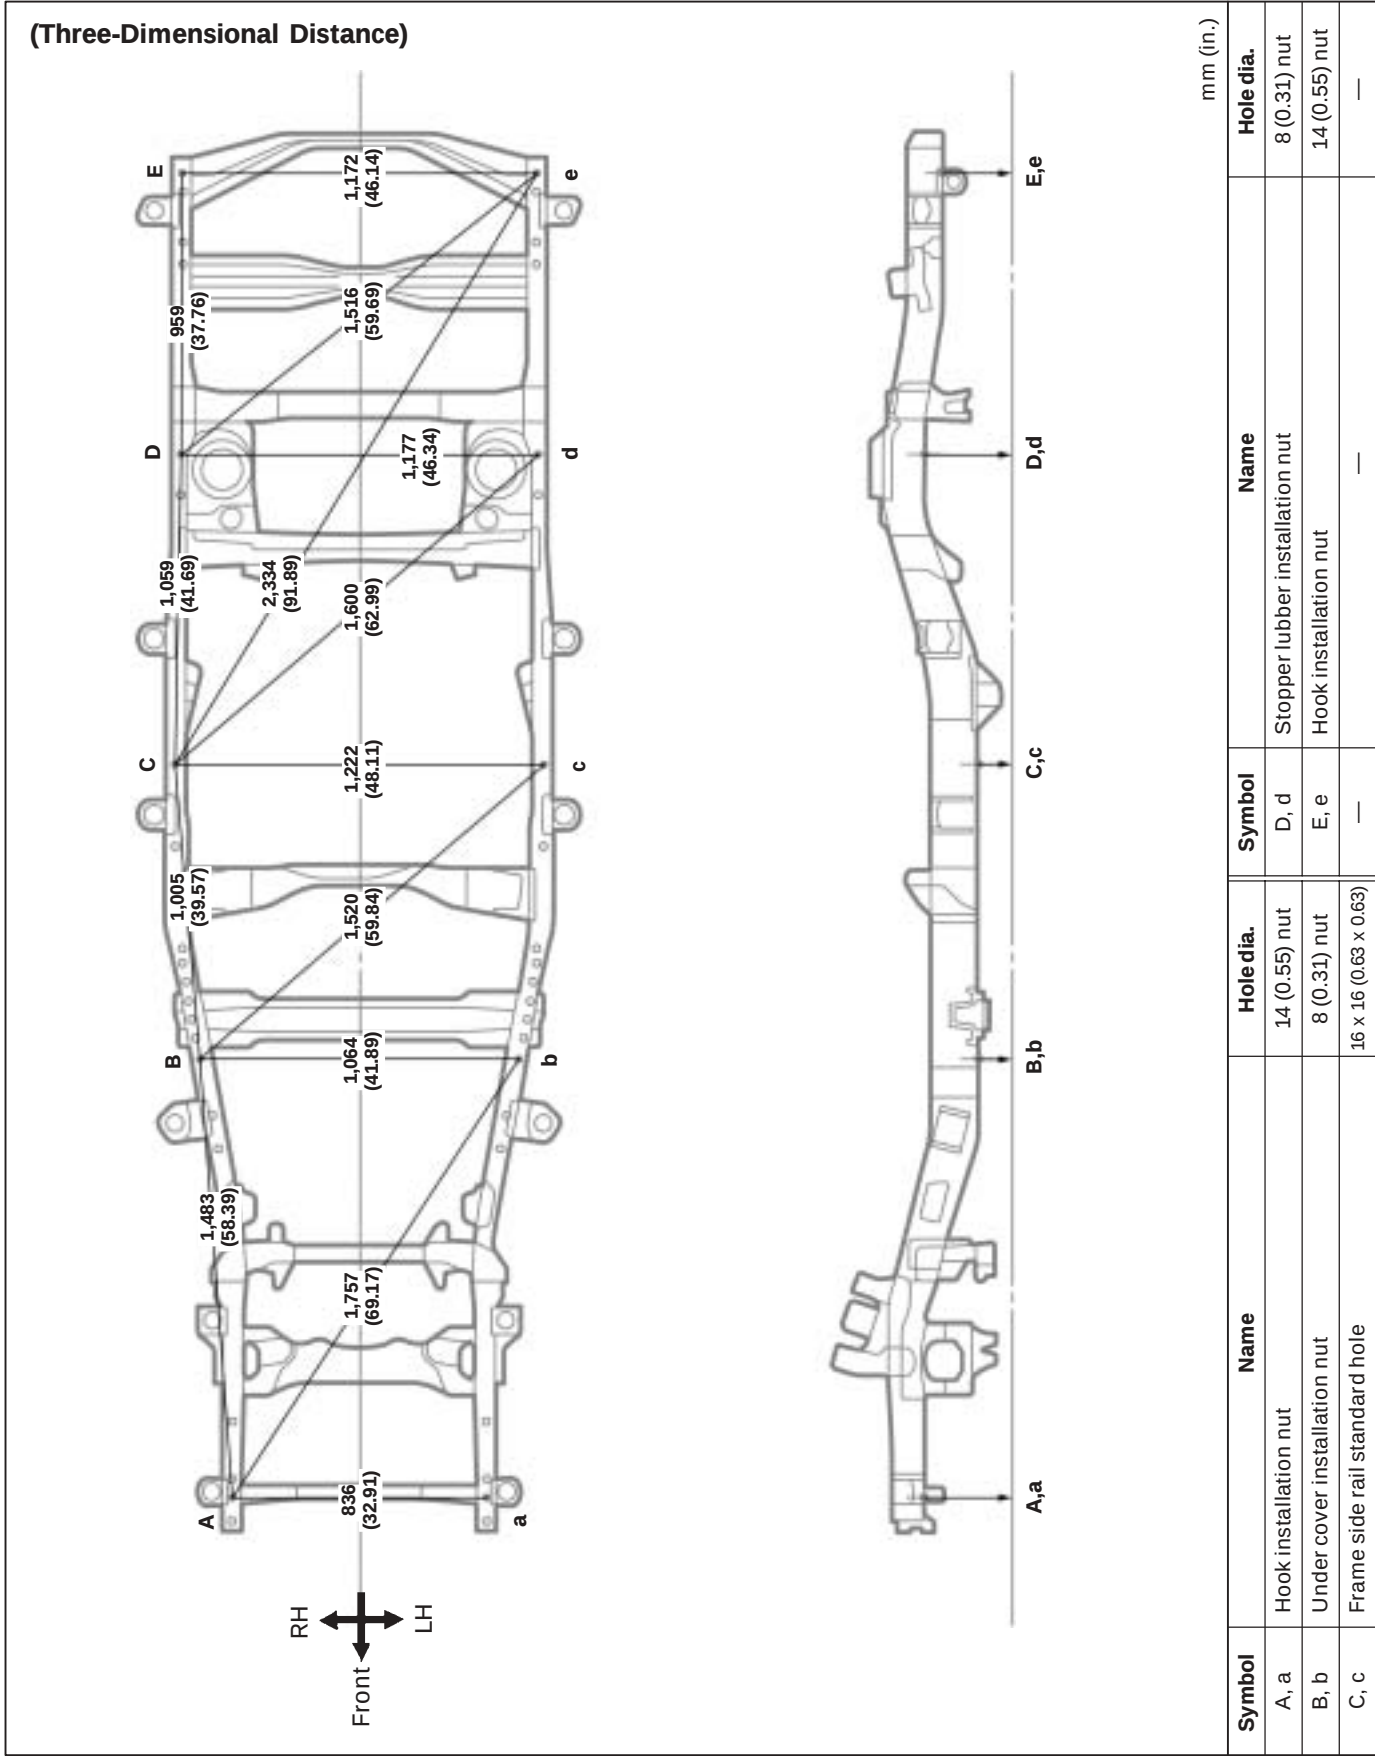

FRAME DIMENSION – Lower Face
UZJ100 series · HDJ100, 101 series · FZJ100 series
(Cont'd)


(Two-Dimensional Distance)

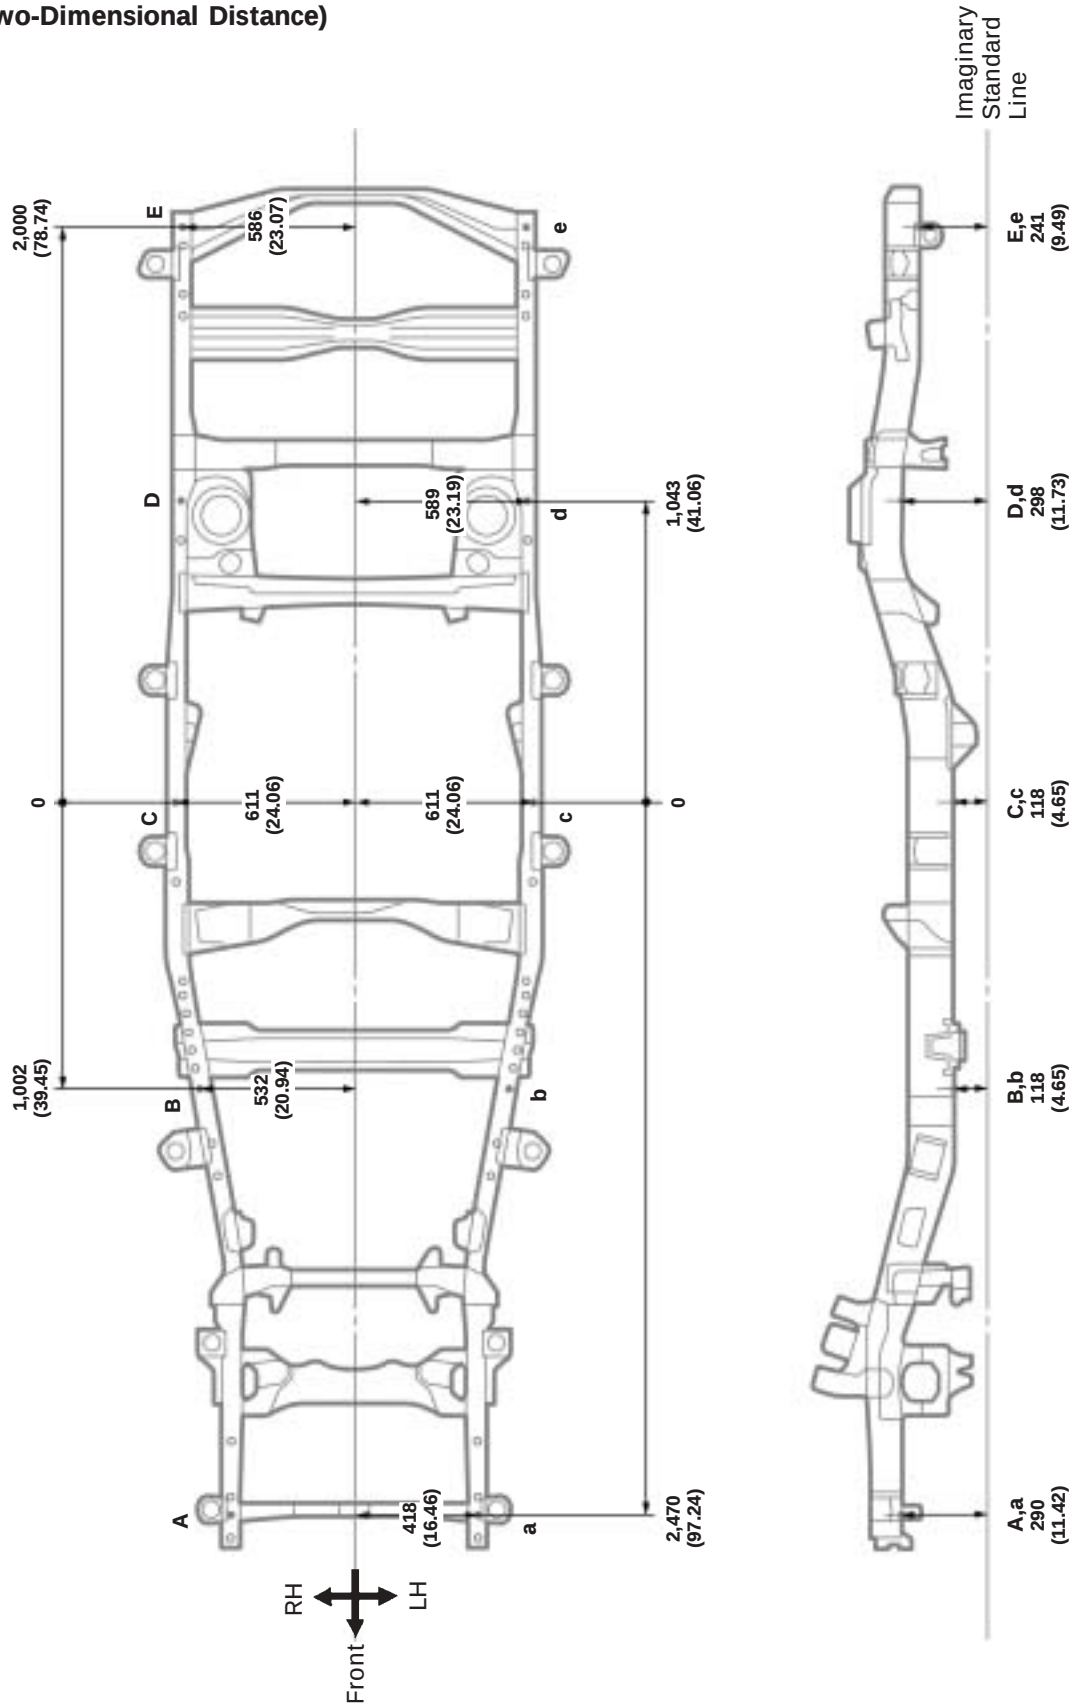

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Hook installation nut	14 (0.55) nut	D, d	Stopper lubber installation nut	8 (0.31) nut
B, b	Under cover installation nut	8 (0.31) nut	E, e	Hook installation nut	14 (0.55) nut
C, c	Frame side rail standard hole	16 x 16 (0.63 x 0.63)	—	—	—

FRAME DIMENSION – Upper Face
FZJ105 series · HZJ105 series

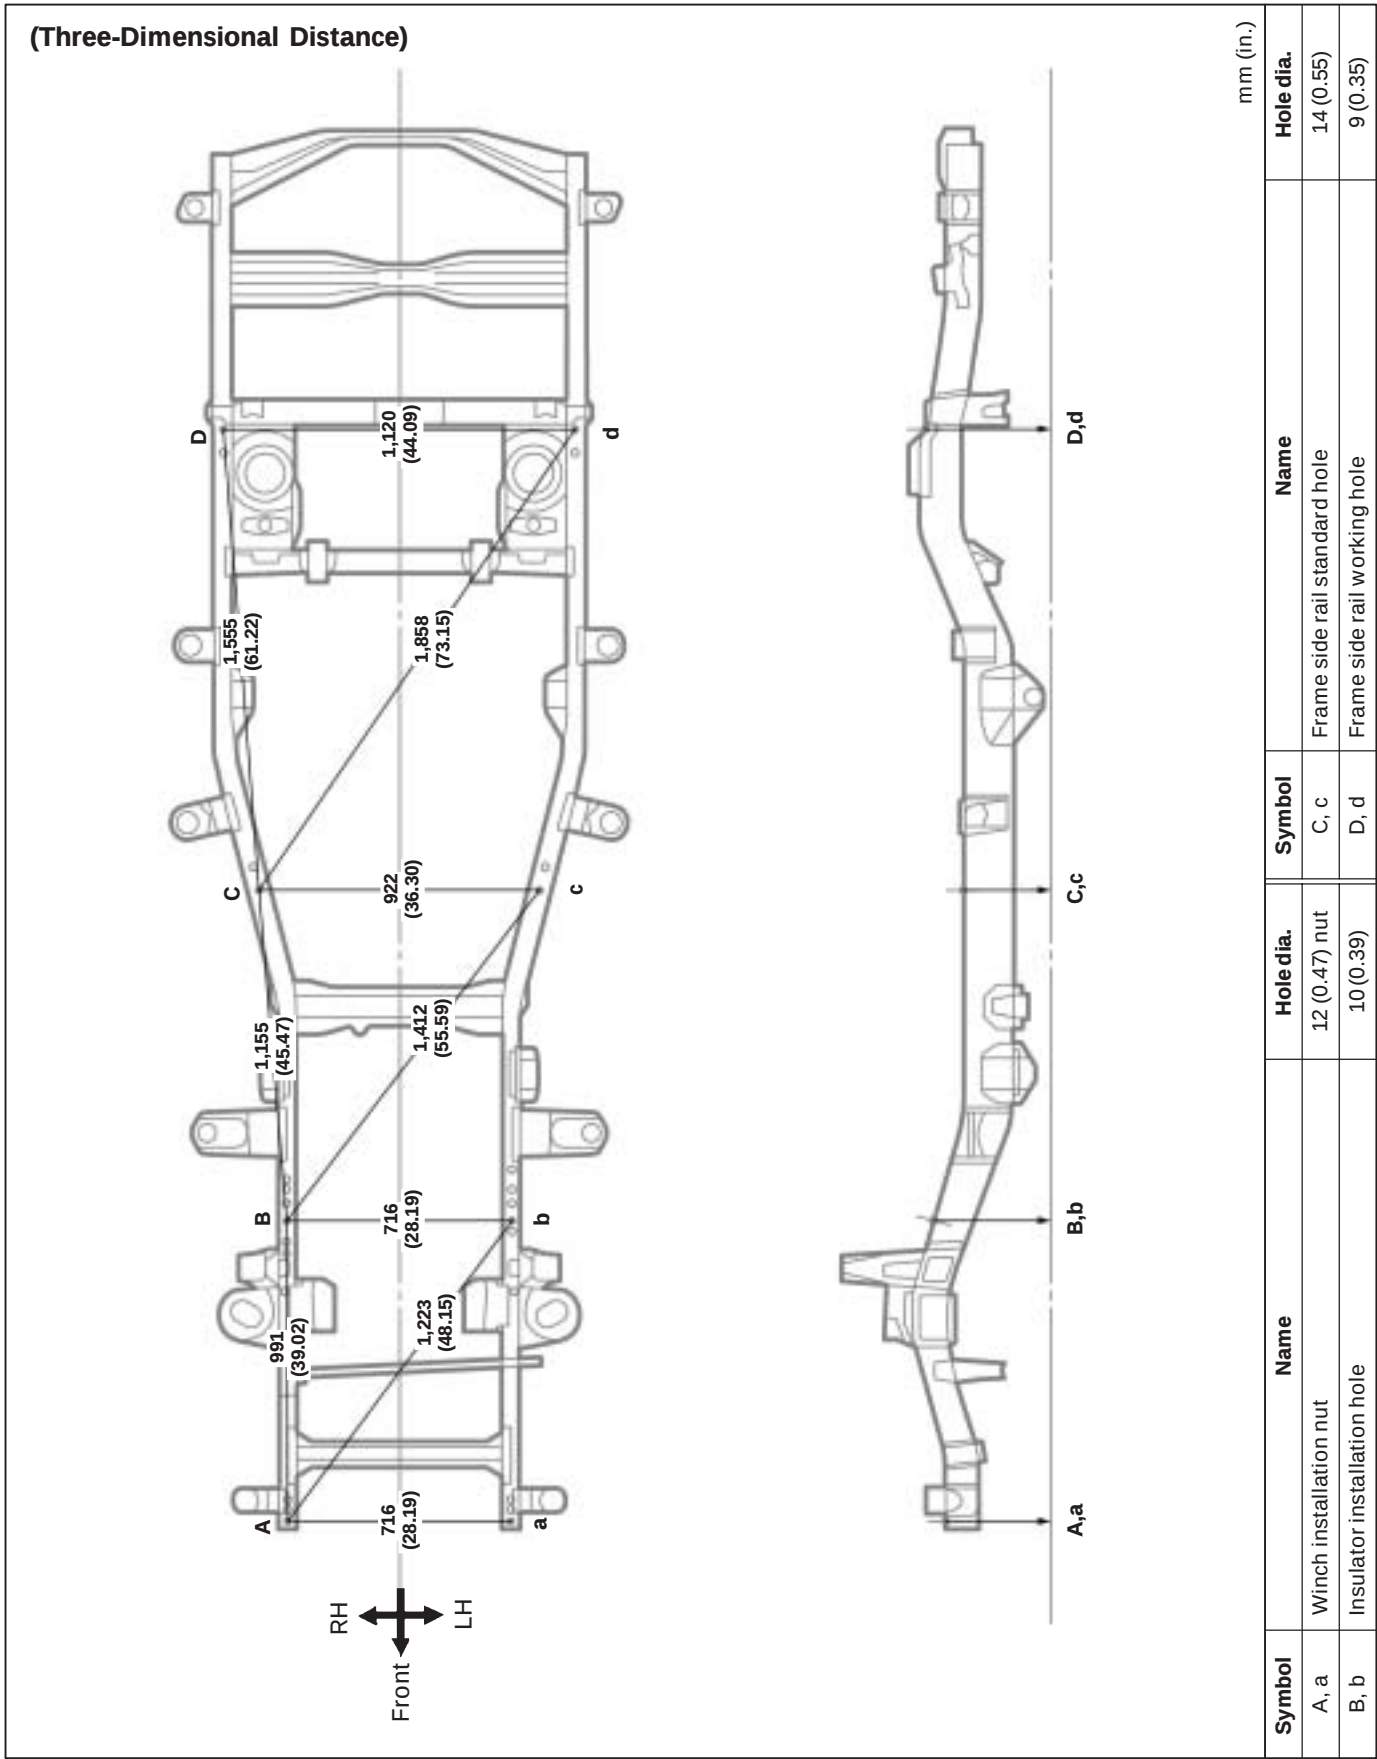


FRAME DIMENSION – Upper Face
FZJ105 series · HZJ105 series (Cont'd)


(Two-Dimensional Distance)

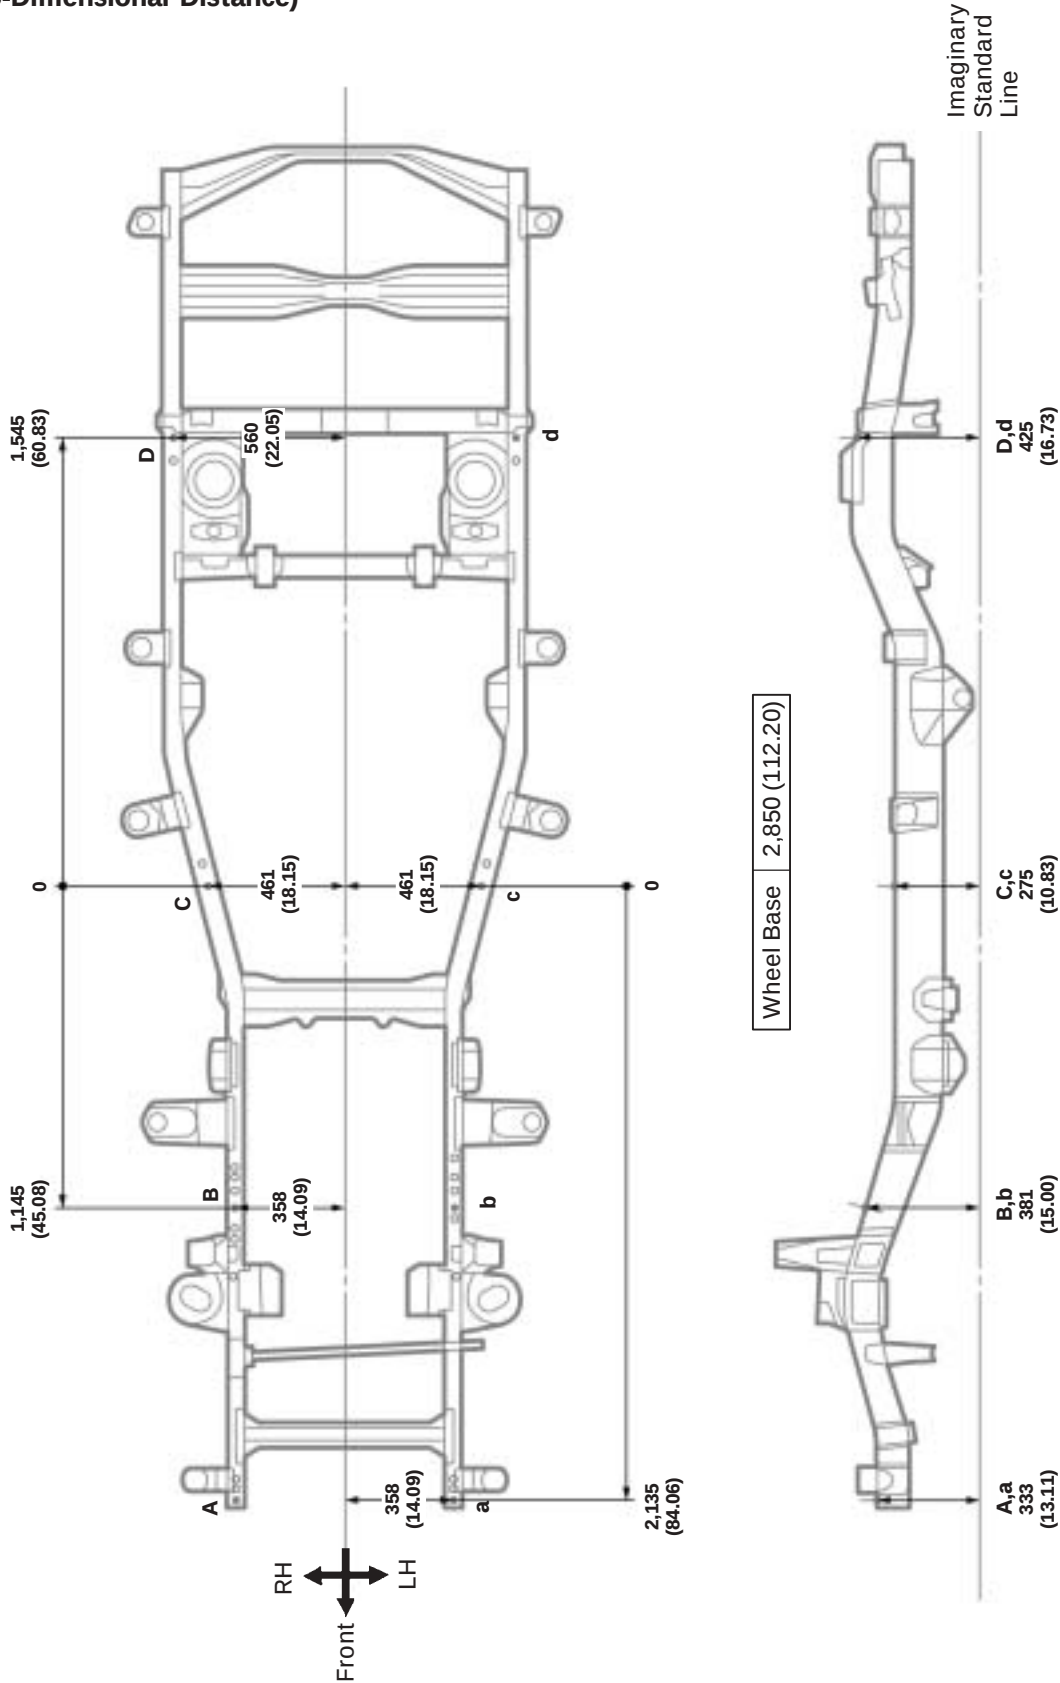

FRAME DIMENSION – Lower Face
FZJ105 series · HZJ105 series

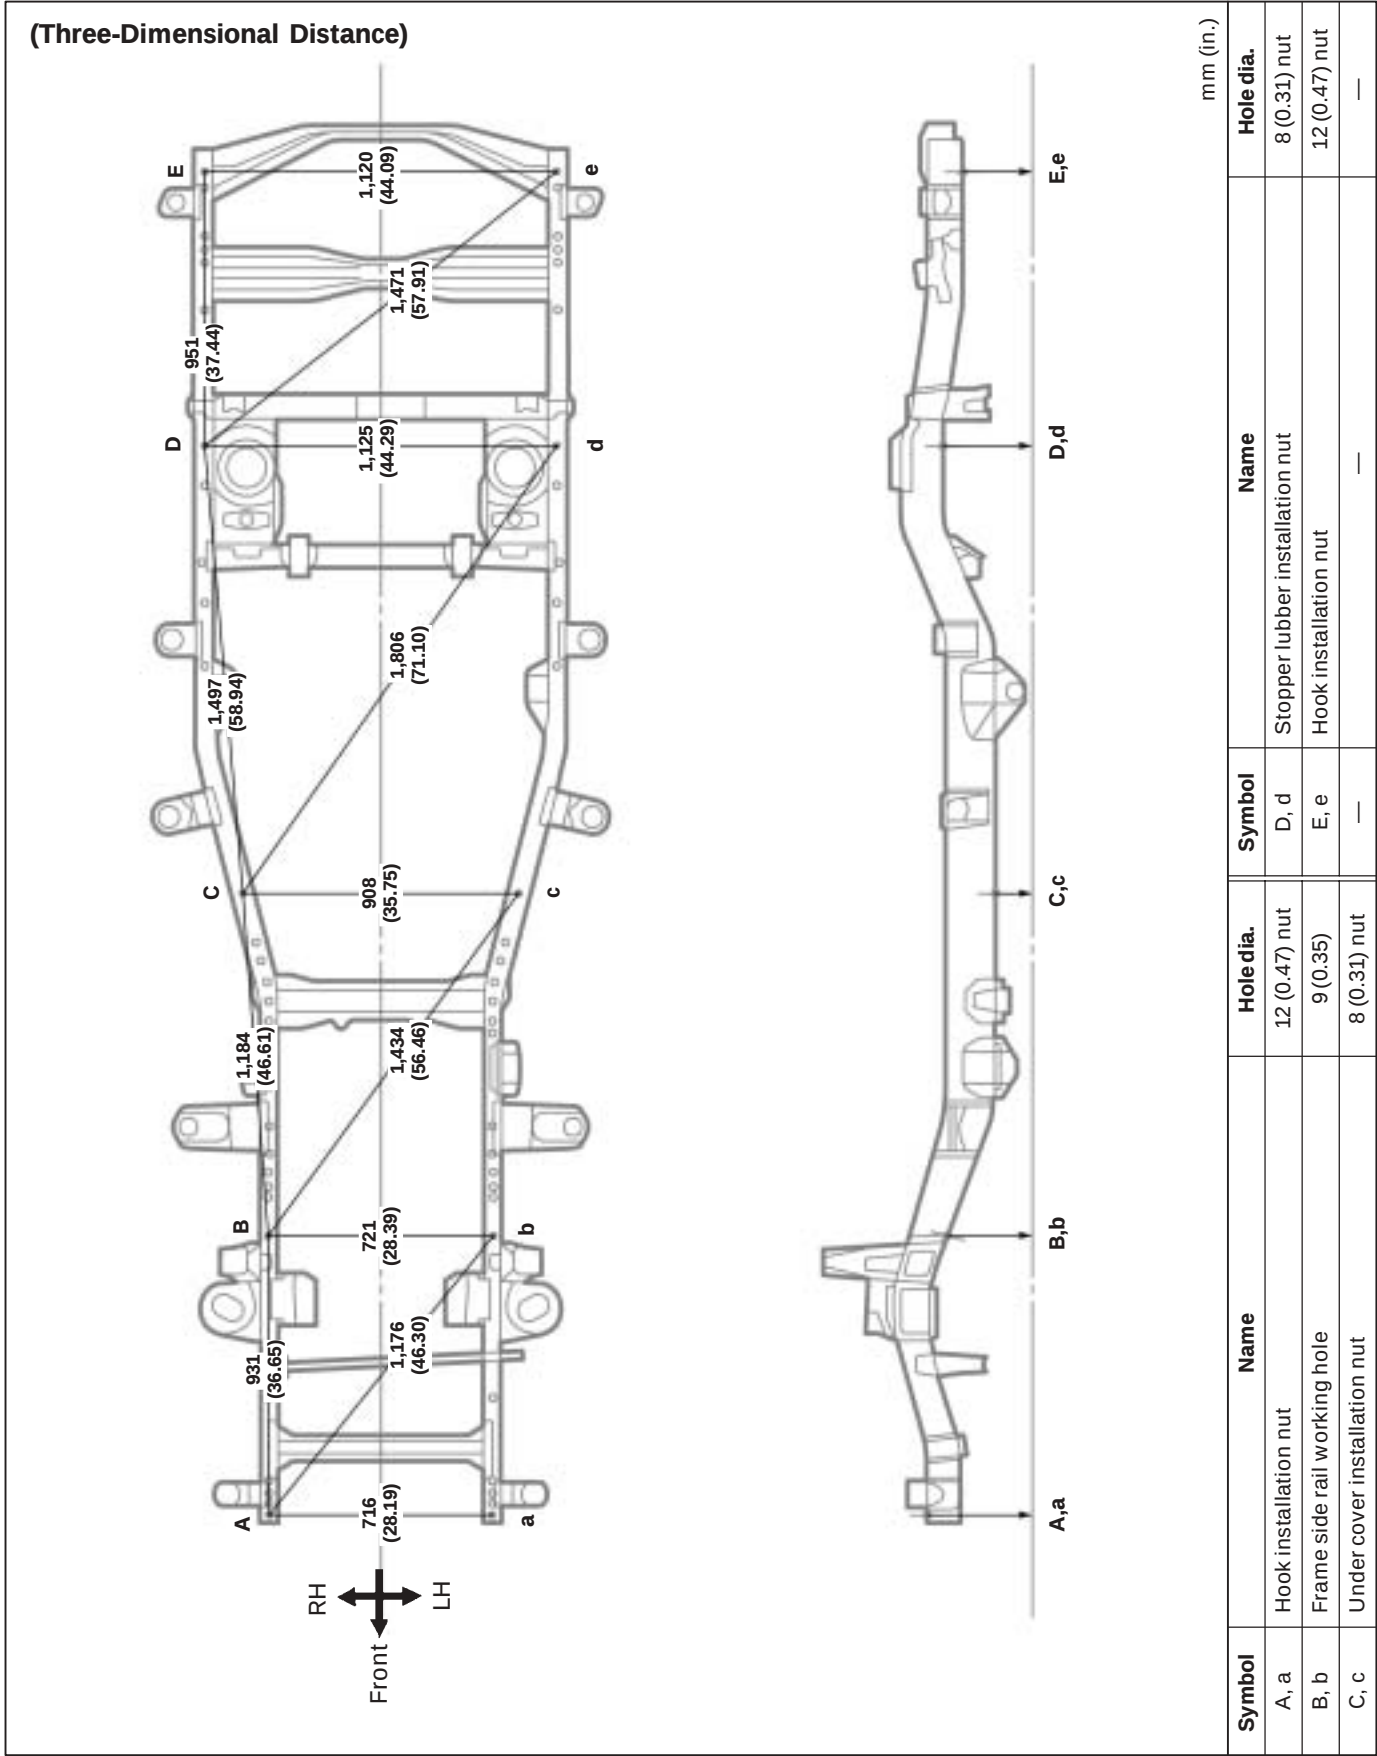

(Two-Dimensional Distance)

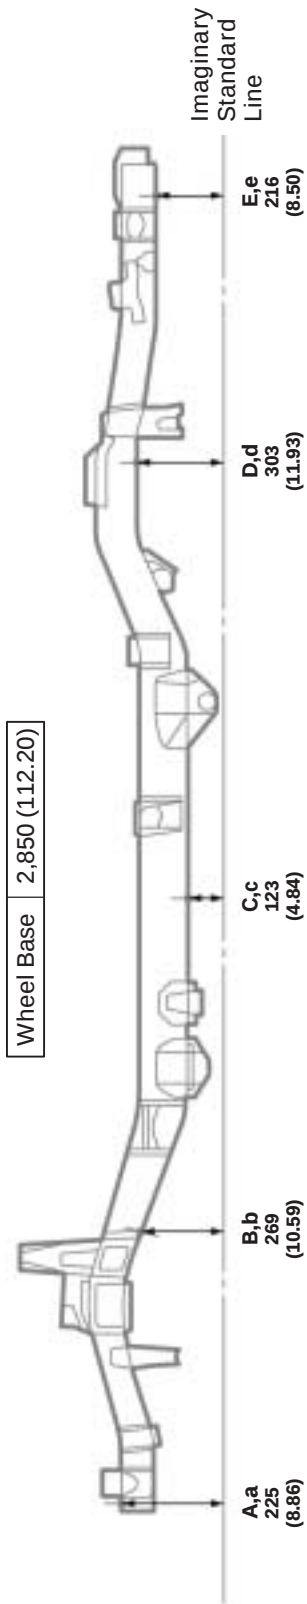

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Hook installation nut	12 (0.47) nut	D, d	Stopper lubber installation nut	8 (0.31) nut
B, b	Frame side rail working hole	9 (0.35)	E, e	Hook installation nut	12 (0.47) nut
C, c	Under cover installation nut	8 (0.31) nut	—	—	—