
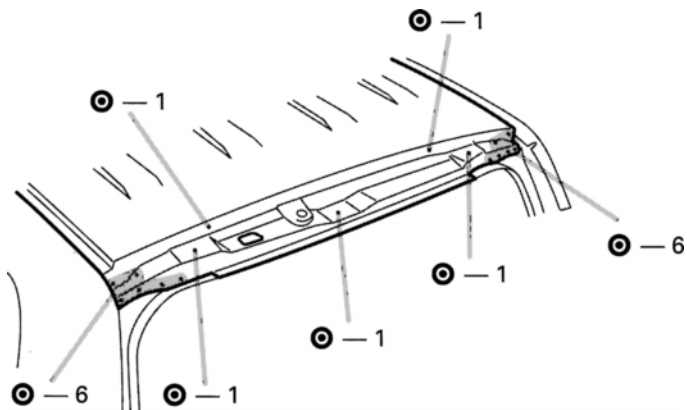
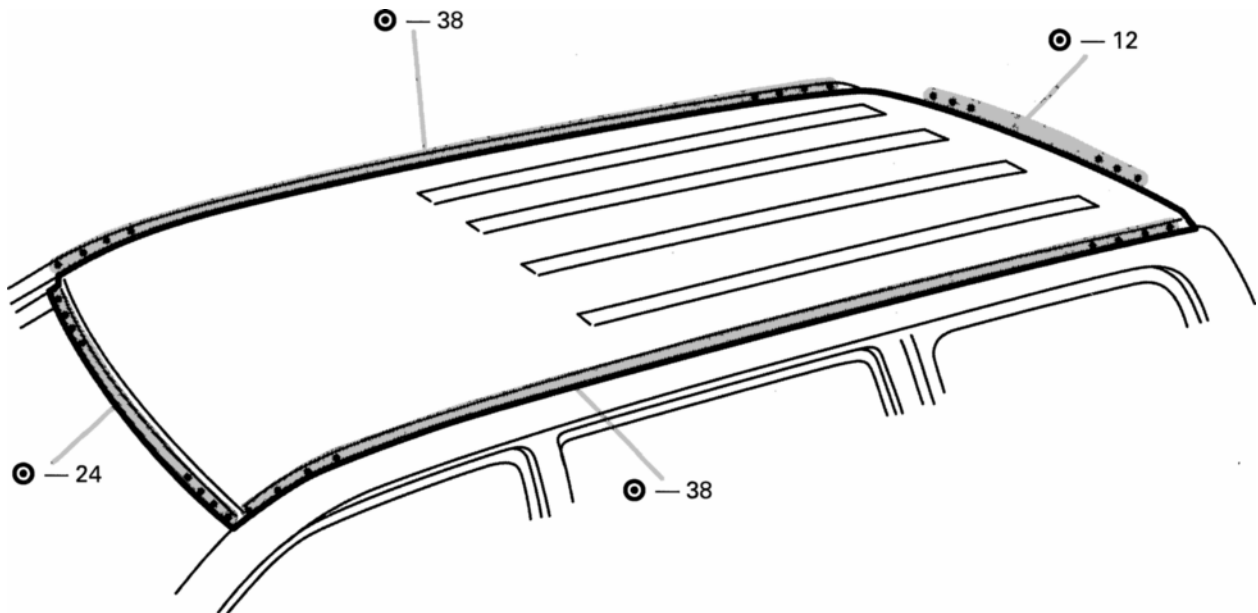




**ROOF PANEL (ASSY): Normal Roof****REMOVAL**

## INSTALLATION

[ Foamed Material  
Application Area ]

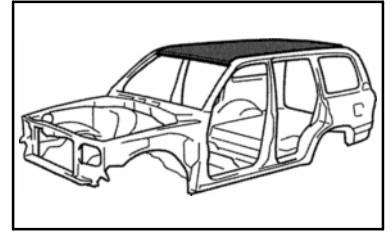

A - A

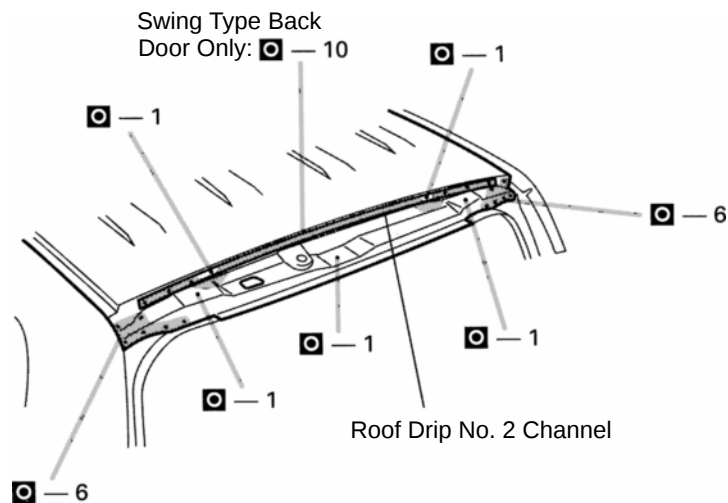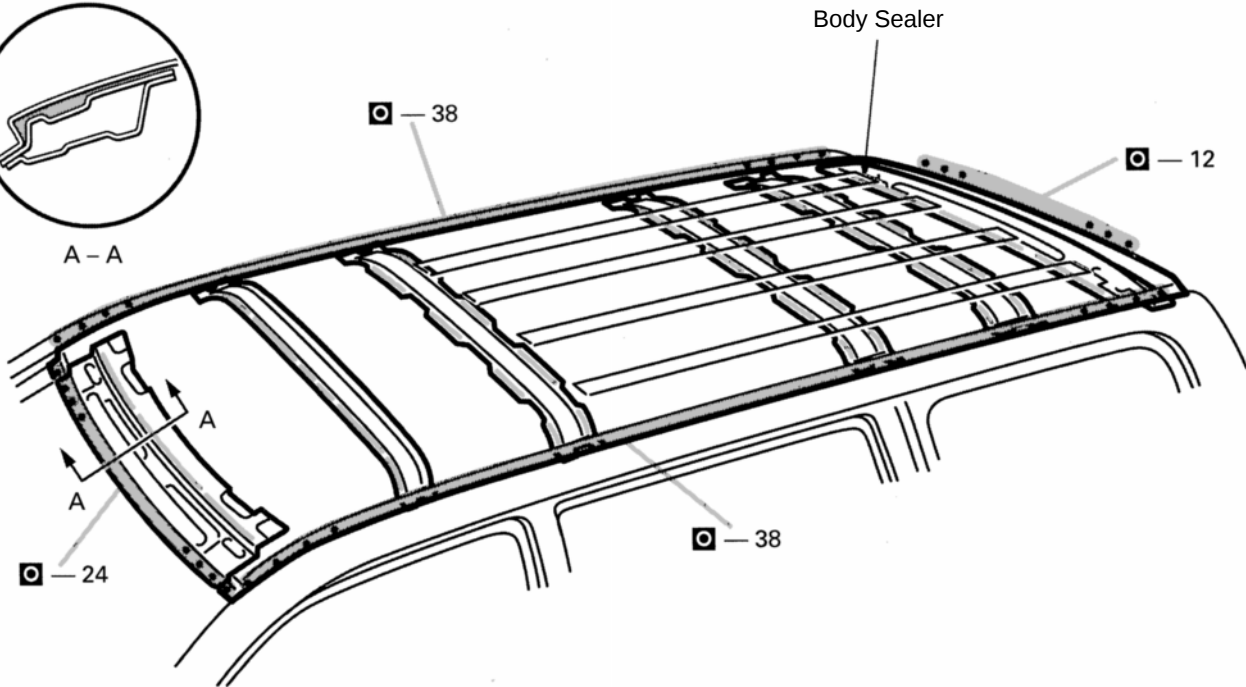

1. Before temporarily installing the new parts, apply body sealer to the windshield header panel, roof panel reinforcement and back door opening upper frame.
2. After installing the new parts, apply foamed materials.

**HINT:**

- 1) Apply just enough sealer for the new parts to make contact.
- 2) For other sealing points, refer to Section AR.