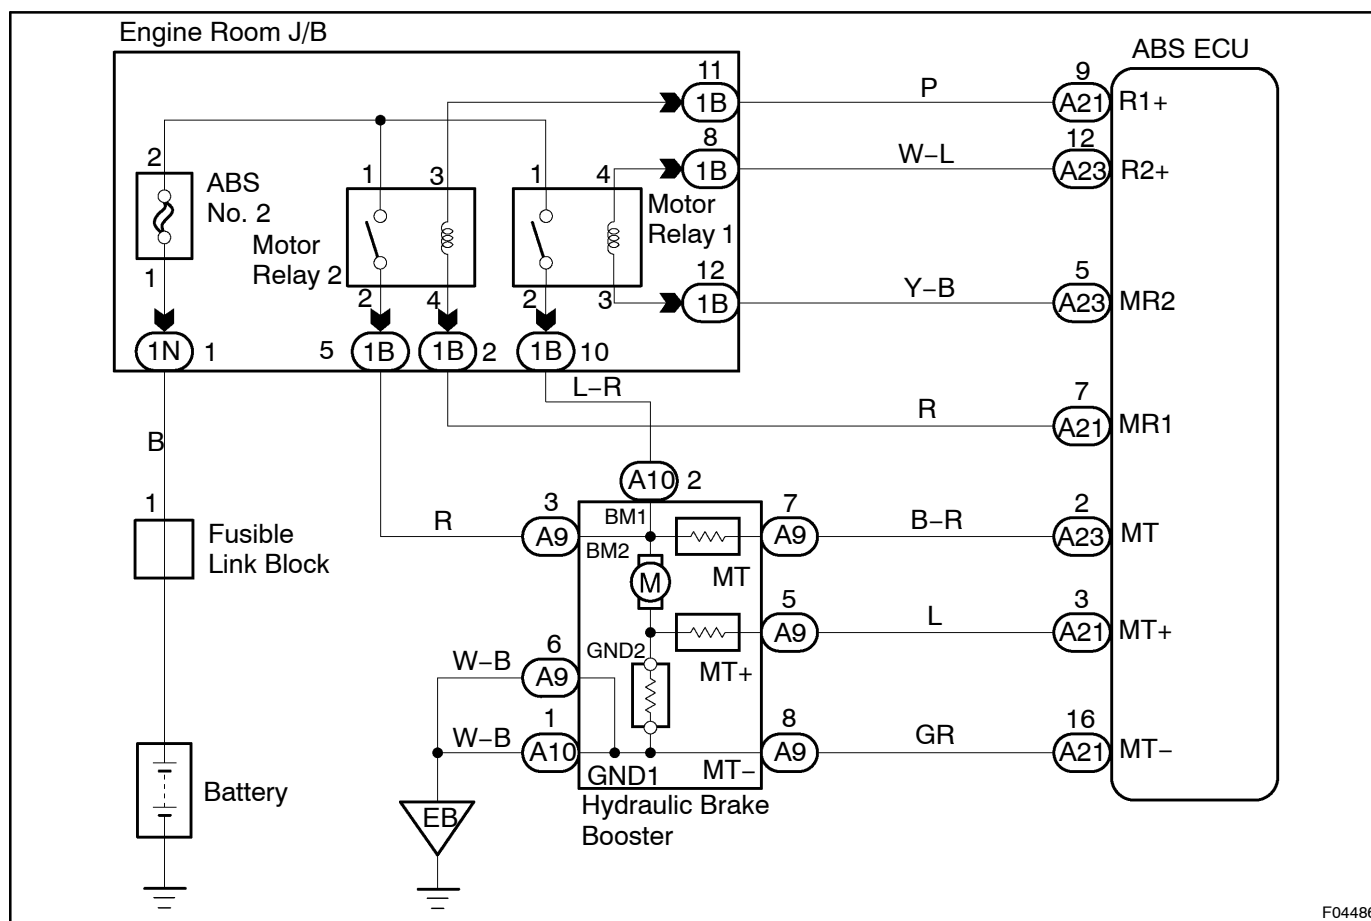


DTC	C1254 / 54	Pressure Switch Circuit
------------	-------------------	--------------------------------

CIRCUIT DESCRIPTION

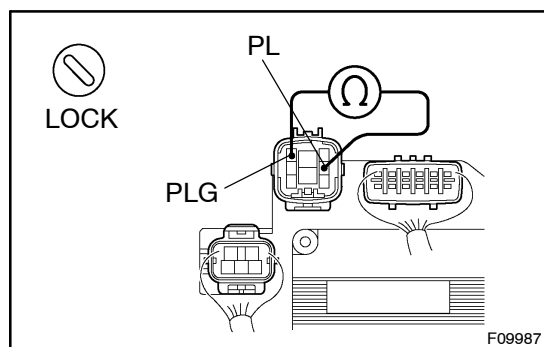
DTC No.	DTC Detecting Condition	Trouble Area
C1254 / 54	Either of the following 1. or 2. is detected: 1. After turning the ignition switch ON, short or open circuit in pressure switch (PL) continued for more than 1 sec. 2. After turning the ignition switch ON open in pressure switch (PH) continued for more than 1 sec.	• Pressure switch (PH or PL) • Pressure switch circuit

WIRING DIAGRAM



INSPECTION PROCEDURE

1 Check pressure switch (PL) resistance.

**PREPARATION:**

- Disconnect the connector (8P) from the hydraulic brake booster.
- With ignition switch OFF, depress the brake pedal more than 40 times to decrease the accumulator pressure.

HINT:

When a pressure in power supply system is released, reaction force becomes light and stroke becomes longer.

CHECK:

Measure resistance between terminals PL and PLG of hydraulic brake booster connector.

OK:

Resistance: 5.1 – 6.3 kΩ

HINT:

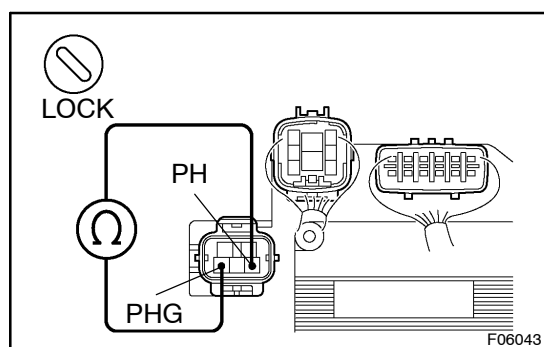
After inspection, connect the connector and clear the DTC (See page [DI-212](#)).

NG

Replace hydraulic brake booster assembly.

OK

2 Check pressure switch (PH) resistance.

**PREPARATION:**

- Disconnect the connector (5P) from the hydraulic brake booster.
- With ignition switch OFF, depress the brake pedal more than 40 times to decrease the accumulator pressure.

HINT:

When a pressure in power supply system is released, reaction force becomes light and stroke becomes longer.

CHECK:


Measure resistance between terminals PH and PHG of hydraulic brake booster connector.

OK:

Resistance: 0.9 – 1.1 kΩ

HINT:

After inspection, connect the connector and clear the DTC (See page [DI-212](#)).

NG**Replace hydraulic brake booster assembly.**OK**3****Check for open and short circuit in harness and connector between pressure switch and ABS ECU (See page [IN-34](#)).**NG**Repair or replace harness or connector.**OK**Check and replace ABS ECU.**