




CRUISE CONTROL

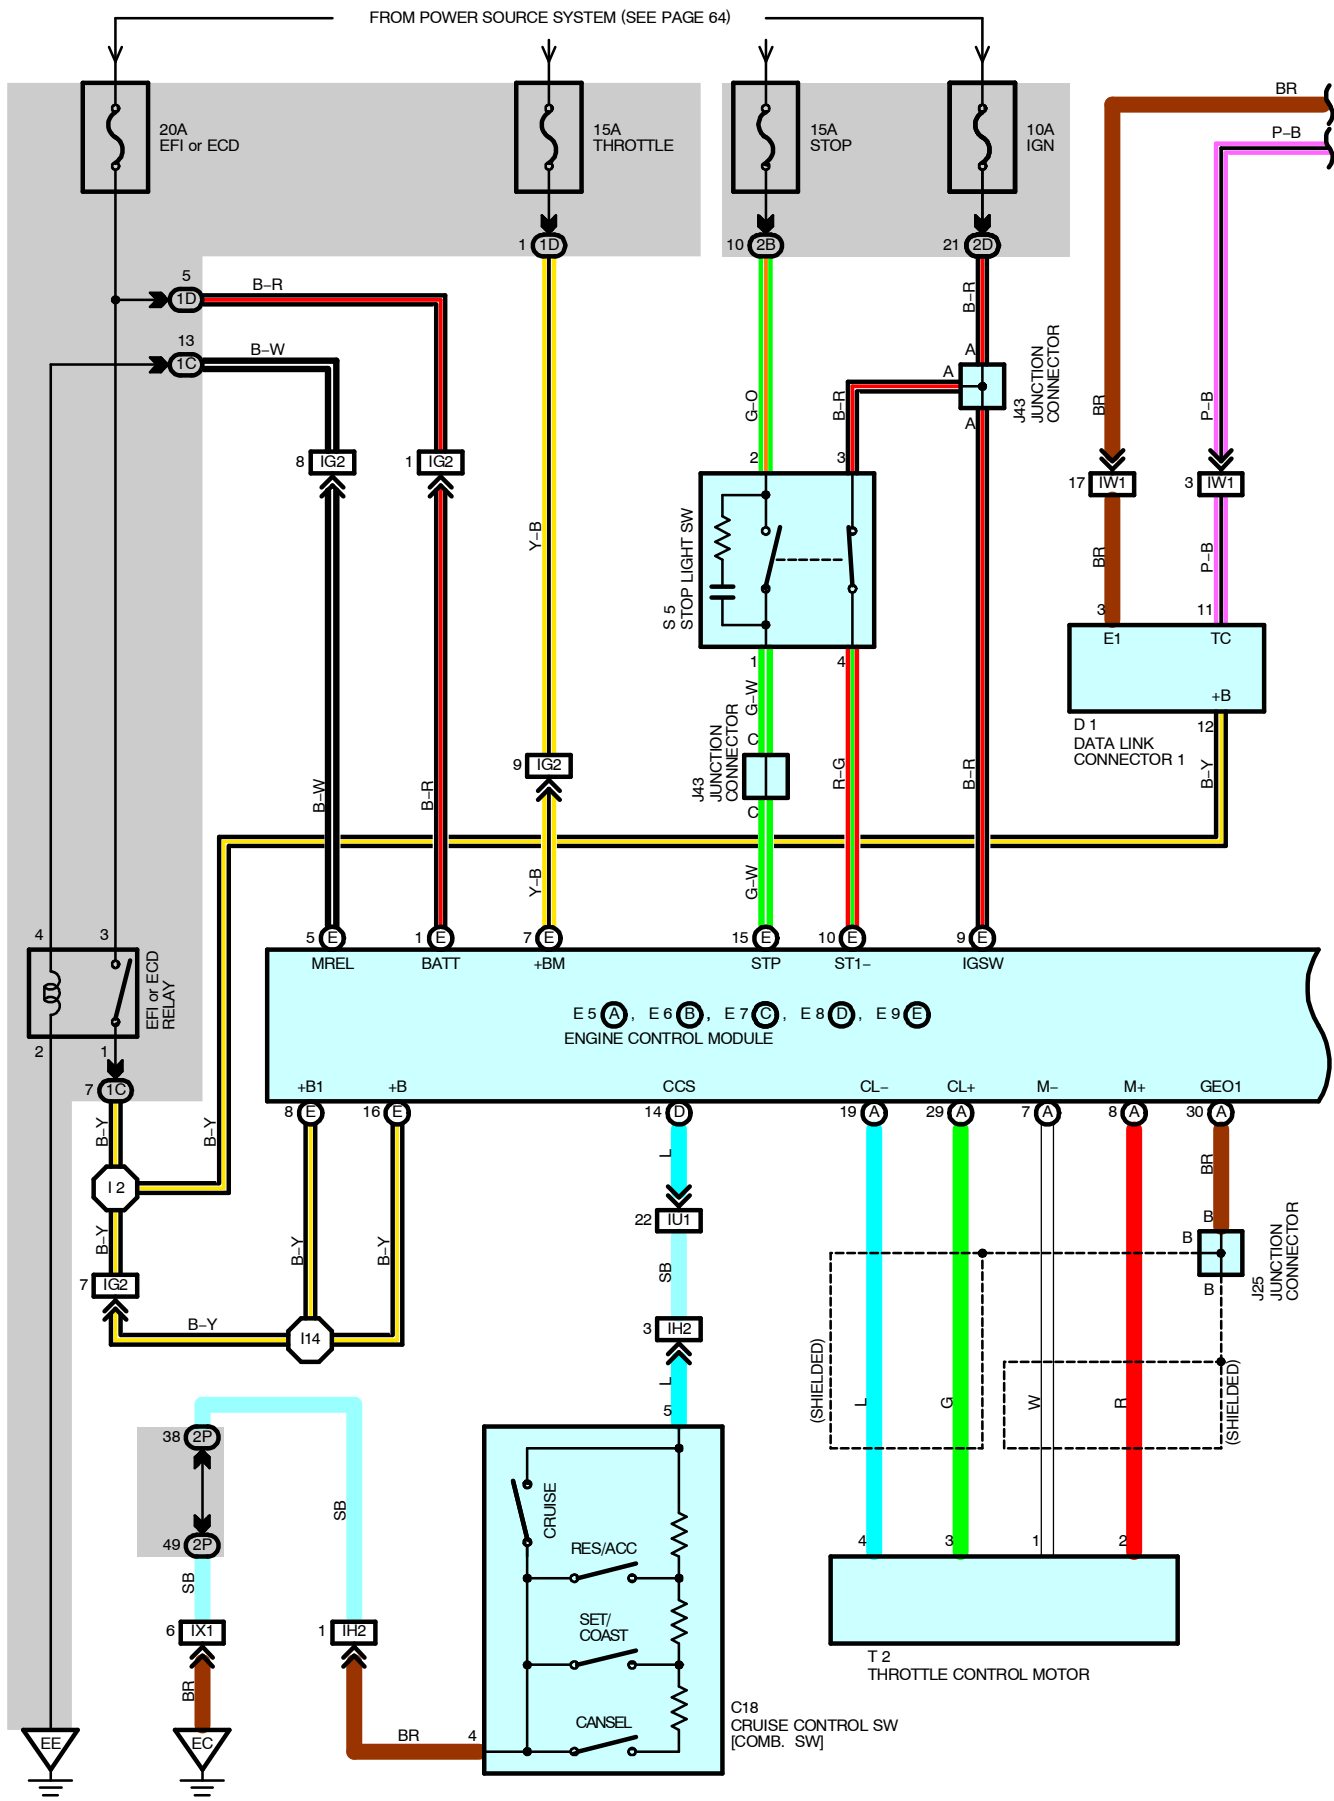

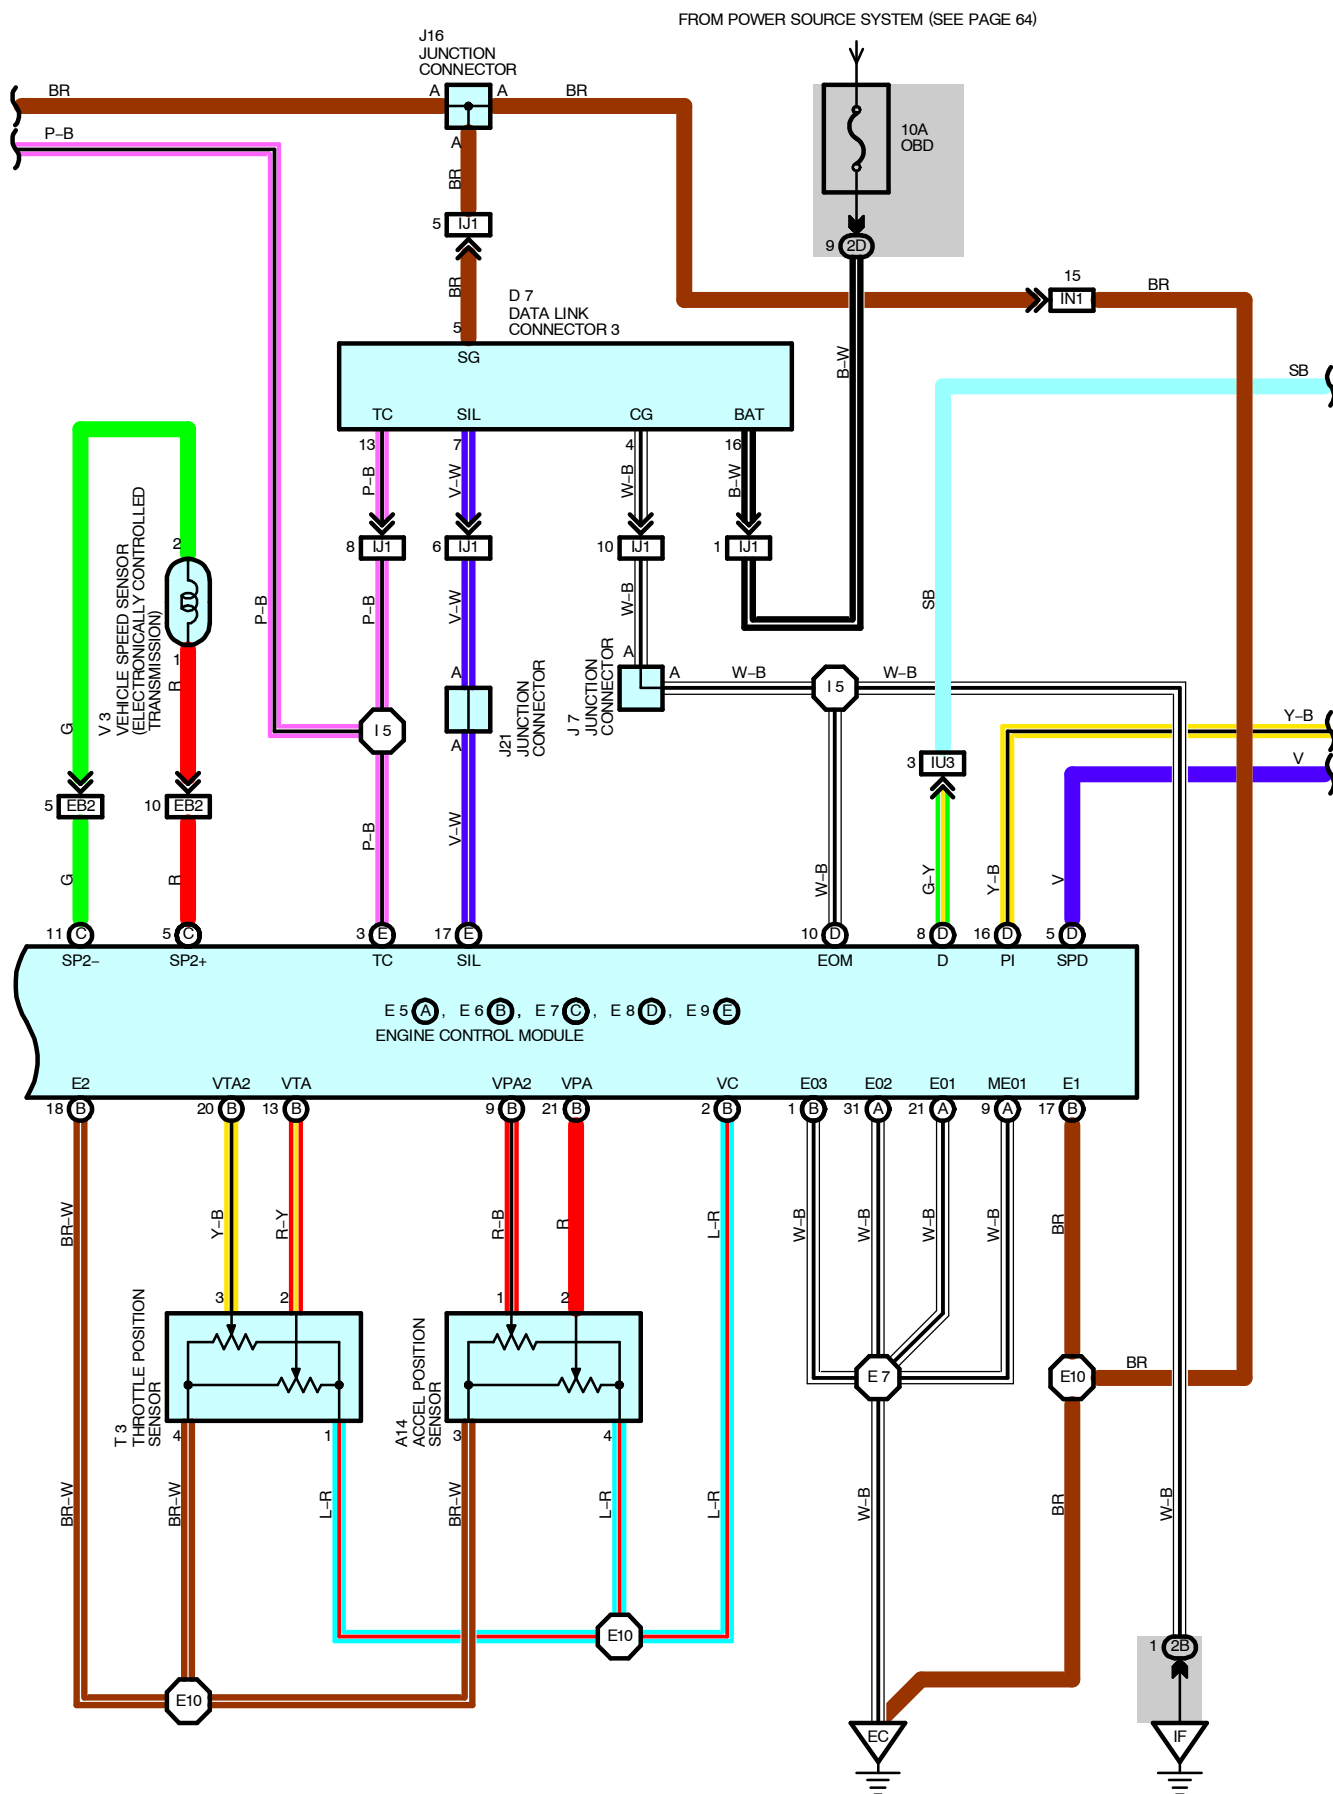

CRUISE CONTROL

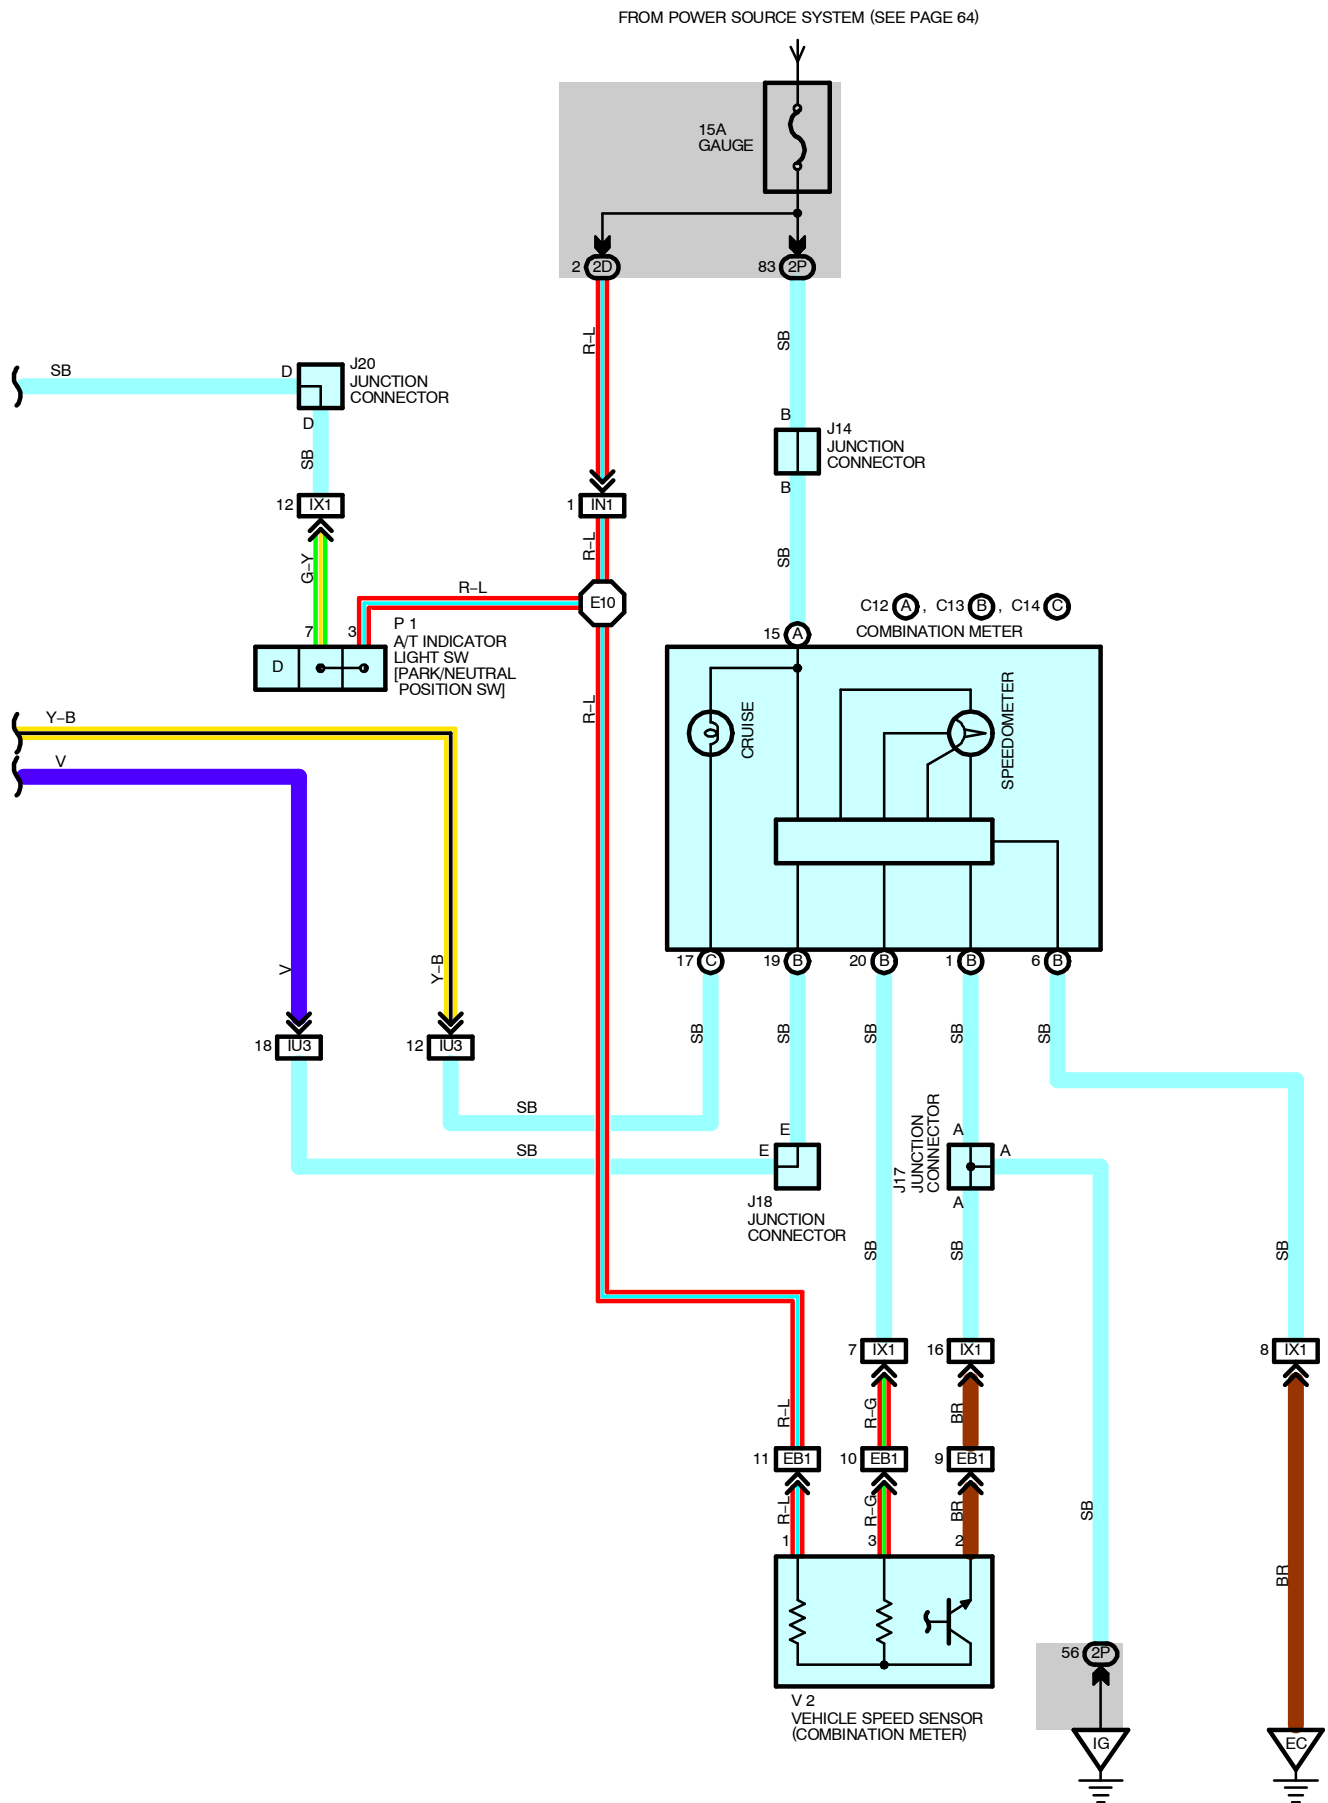

SYSTEM OUTLINE

The cruise control system is a constant vehicle speed controller which controls the opening angle of the engine throttle valve by the SW, and allows driving at a constant speed without depressing the accelerator pedal.

SET OPERATION

When the CRUISE SW is turned on, the system starts preparations for cruise control and turns on the indicator light in the combination meter.

SET SPEED CONTROL

When the SET/COAST SW is operated with the CRUISE SW turned on during driving, the speed is controlled at a constant speed.

COAST CONTROL

When the SET/COAST SW is kept turned on during cruise control driving, the engine control module controls the throttle valve to decelerate the vehicle speed.

Every time the SET/COAST SW is turned on instantaneously, the vehicle speed is decelerated approx. 1.5 km/h.

ACCEL CONTROL

When the RES/ACC SW is kept turned on during cruise control driving, the engine control module controls the throttle valve to accelerate the vehicle speed.

Every time the SET/COAST SW is turned on instantaneously, the vehicle speed is accelerated approx. 1.5 km/h.

RESUME CONTROL

If the vehicle speed is within the low speed limit (Approx. 40 km/h, 25 mph) when canceling the cruise control, operation of the RES/ACC SW accelerates the vehicle speed and resumes the level before canceling the cruise control.

MANUAL CANCEL MECHANISM

If any of the following signals are input during cruise control driving, the cruise control is canceled.

- * The stop light SW is on
- * The CANCEL SW is turned on
- * The CRUISE SW is turned off

AUTO CANCEL FUNCTION

If any of the following conditions are detected, the cruise control is canceled:

- * Failure in the stop light SW wiring
- * Abnormality in the vehicle speed signal
- * Malfunction in the electronically controlled throttle parts

OVERDRIVE FUNCTION

The overdrive may be canceled if the vehicle travels on an upward slope during cruise control driving. After the overdrive is canceled, if the vehicle speed exceeds the overdrive return speed (Set speed (2 km/h, 1.2 mph)) and it is determined that the slope has finished, and the vehicle returns to overdrive mode again.

SERVICE HINTS

E5 (A), E6 (B), E8 (D), E9 (E) ENGINE CONTROL MODULE

IGSW-E1 : 9.0–14.0 volts with ignition SW at ON or ST position

BATT-E1 : Always approx. 9.0–14.0 volts

STP-E1 : Approx. 12 volts with stop light SW at on

: Below 1.5 volts with brake pedal is released

C18 CRUISE CONTROL SW [COMB. SW]

5–4 : Approx. 1540 Ω with CANCEL SW on

: Approx. 240 Ω with SET/COAST SW on

: Approx. 630 Ω with RES/ACC SW on

CRUISE CONTROL

: PARTS LOCATION

Code		See Page	Code		See Page	Code	See Page
A14		38	E7	C	40	J21	41
C12	A	40	E8	D	40	J25	41
C13	B	40	E9	E	40	J43	41
C14	C	40	J7		41	P1	39
C18		40	J14		41	S5	41
D1		38	J16		41	T2	39
D7		40	J17		41	T3	39
E5	A	40	J18		41	V2	39
E6	B	40	J20		41	V3	39

: JUNCTION BLOCK AND WIRE HARNESS CONNECTOR

Code	See Page	Junction Block and Wire Harness (Connector Location)
1C	23	Engine Room No.2 Wire and Engine Room J/B (Engine Compartment Left)
1D		
2B	26	Dash Wire and Cowl Side J/B LH (Left Kick Panel)
2D		
2P	28	Instrument Panel Integration Wire and Cowl Side J/B LH (Left Kick Panel)

: CONNECTOR JOINING WIRE HARNESS AND WIRE HARNESS

Code	See Page	Joining Wire Harness and Wire Harness (Connector Location)
EB1	46	Engine Wire and Transmission Wire (On the Transmission)
EB2		
IG2	50	Engine Room No.2 Wire and Dash Wire (Behind the Combination Meter)
IH1	50	Instrument Panel Integration Wire and Column Wire (Near the Ignition SW)
IH2		
IJ1	50	Dash Wire and Detector Wire (Instrument Panel Center)
IN1	52	Engine Wire and Dash Wire (Behind the Glove Box)
IU1	52	Instrument Panel Integration Wire and Dash Wire (Behind the Glove Box)
IU2		
IU3		
IW1	54	Engine Room No.2 Wire and Dash Wire (Behind the Glove Box)
IX1	54	Instrument Panel Integration Wire and Engine Wire (Behind the Glove Box)

: GROUND POINTS

Code	See Page	Ground Points Location
EC	46	Rear Bank of Right Cylinder Head
EE	46	Front Left Side of Fender Apron
IF	48	Set Bolt of Cowl Side J/B LH
IG		

: SPLICE POINTS

Code	See Page	Wire Harness with Splice Points	Code	See Page	Wire Harness with Splice Points
E7	46	Engine Wire	I5	50	Dash Wire
E10			I14		
I2	50	Engine Room No.2 Wire			

