


DTC	P2716	Pressure Control Solenoid "D" Electrical (Shift Solenoid Valve SLT)
------------	--------------	--

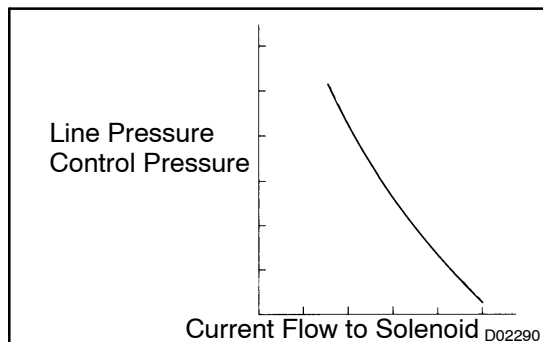

CIRCUIT DESCRIPTION


The throttle pressure that is applied to the primary regulator valve (which modulates line pressure) causes the solenoid valve SLT, under electronic control, to precisely and minutely modulate and generate line pressure according to the accelerator pedal effort, or the detected engine power output. This controls the line pressure and provides smooth shifting characteristics.

Upon receiving the throttle valve opening angle signal, ECM controls the line pressure by sending a predetermined (*) duty ratio to the solenoid valve, modulating the line pressure, and generating throttle pressure.

(*) Duty Ratio


The duty ratio is the ratio of the period of continuity in one cycle. For example, if A is the period of continuity in one cycle, and B is the period of non-continuity, then

$$\text{Duty Ratio} = \frac{A}{A + B} \times 100 (\%)$$

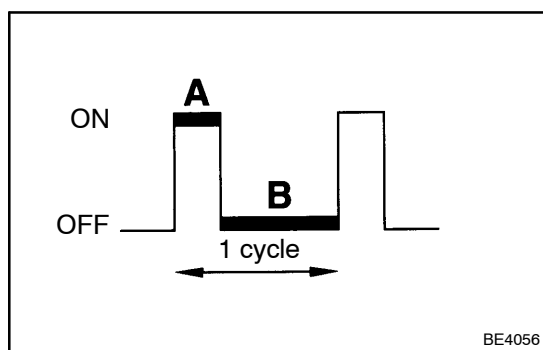


DTC No.	DTC Detection Condition	Trouble Area
P2716	ECM detects solenoid SLT circuit malfunction for 1 sec. or more (1-trip detection logic)	• Open or short in shift solenoid valve SLT circuit • Shift solenoid valve SLT • ECM

WIRING DIAGRAM

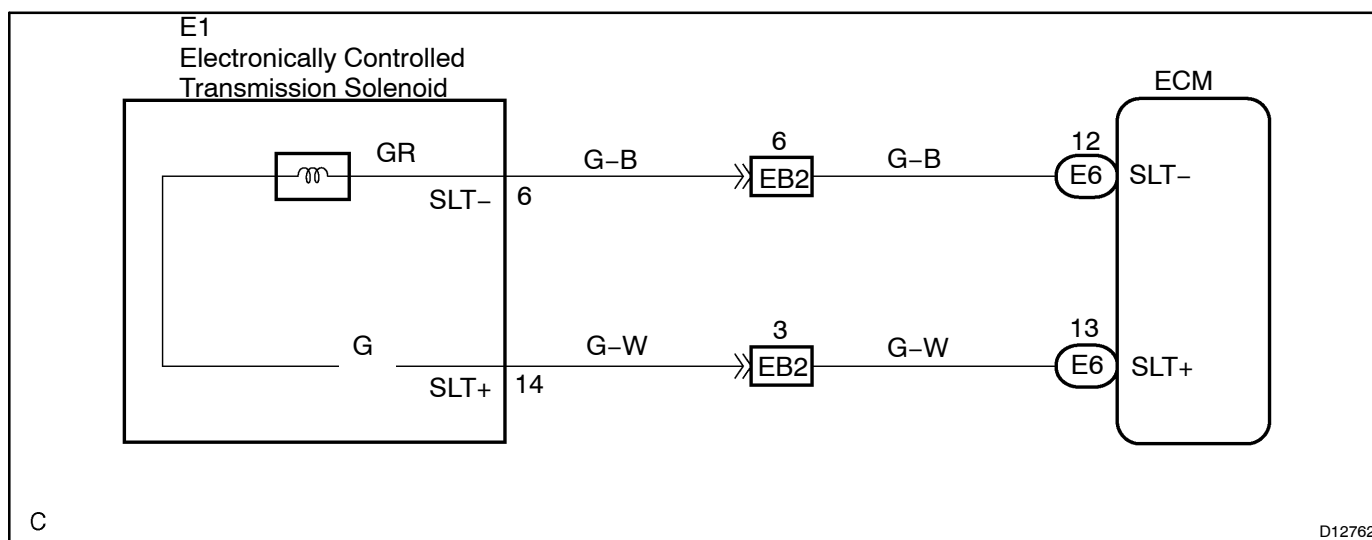

INSPECTION PROCEDURE

1 Check transmission wire.

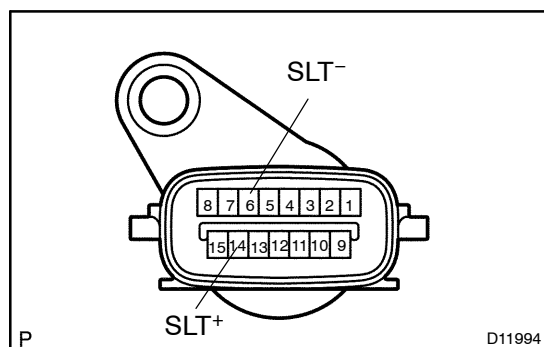

PREPARATION:

Disconnect the transmission wire connector.

CHECK:

Measure resistance between SLT⁺ and SLT⁻ of transmission wire.

OK:

Resistance: 5.0 – 5.6 Ω at 20 °C (68 °F)

CHECK:

Measure resistance between terminals SLT⁺ and SLT⁻ of the transmission wire connector and body ground.

OK:


Resistance: 1 M Ω or higher

NG

Go to step 3.

OK

2 Measure resistance between terminal SLT⁺ and SLT⁻ of ECM connector.

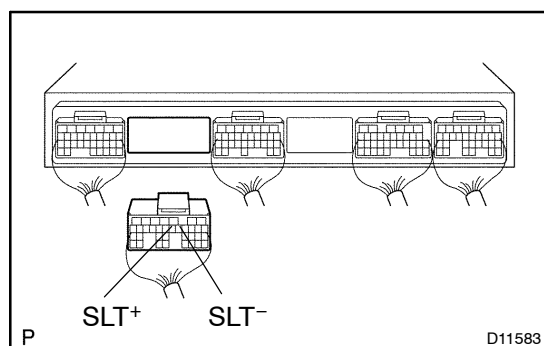

PREPARATION:

(a) Connect the transmission wire connector.

(b) Disconnect the connector of the ECM.

CHECK:

Measure resistance between terminals SLT⁺ and SLT⁻ of ECM connector.

OK:

Resistance: 5.0 – 5.6 Ω at 20 °C (68 °F)

CHECK:

Measure resistance between terminals SLT⁺ and SLT⁻ of the ECM connector and body ground.

OK:


Resistance: 1 M Ω or higher

NG

Repair or replace the harness or connector (See page [IN-36](#)).

OK

Check and replace the ECM (See page [IN-36](#)).

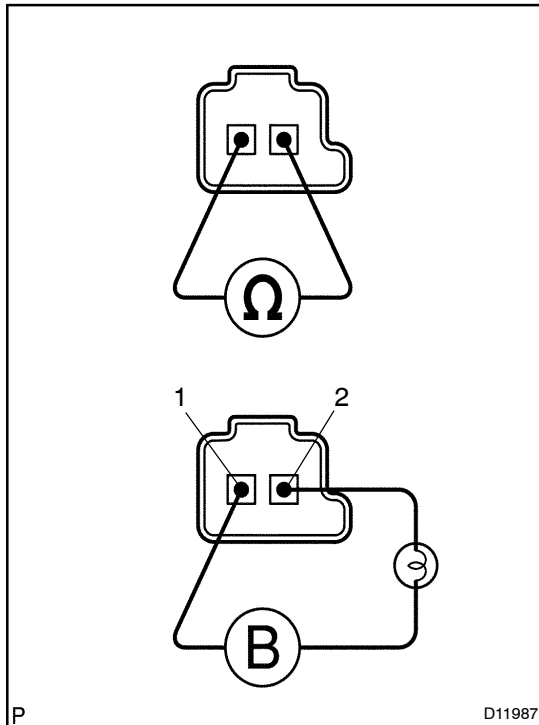3**Check shift solenoid valve SLT.****PREPARATION:**

- (a) Jack up the vehicle.
- (b) Remove the oil pan.
- (c) Remove the shift solenoid valve SLT.

CHECK:

- (a) Measure the resistance between terminals 1 and 2 of solenoid connector.

Standard: 5.0 – 5.6 Ω at 20° C (68° F)

- (b) Connect the positive (+) lead with an 21 W bulb to terminal 2 of solenoid connector and negative (–) lead to terminal 1 of the solenoid valve connector, then check the movement of the valve.

Standard: Solenoid sounds operation noise.**OK:****Standard****NG****Replace the shift solenoid valve SLT
(See page [AT-8](#)).****OK****Repair or replace the transmission wire
(See page [AT-6](#)).**