

DTC	B1182/19	Short in D Squib (2nd step) Circuit (to Ground)
------------	-----------------	--

CIRCUIT DESCRIPTION

The D squib (2nd step) circuit consists of the airbag sensor assembly, the spiral cable and the steering wheel pad.

It causes the SRS to deploy when the SRS deployment conditions are satisfied.

For details of the function of each component, see OPERATION on page [RS-3](#).

DTC B0102/11 is recorded when a ground short is detected in the D squib (2nd step) circuit.


DTC No.	DTC Detecting Condition	Trouble Area
B1182/19	• Short in D squib (2nd step) circuit (to ground) • D squib (2nd step) malfunction • Spiral cable malfunction • Airbag sensor assembly malfunction	• Steering wheel pad (D squib (2nd step)) • Spiral cable • Airbag sensor assembly • Dash wire • Column wire

WIRING DIAGRAM


See page [DI-713](#).

INSPECTION PROCEDURE

1	Prepare for inspection (See step 1 on page DI-523).
----------	--



2	Check D squib (2nd step) circuit.
----------	--

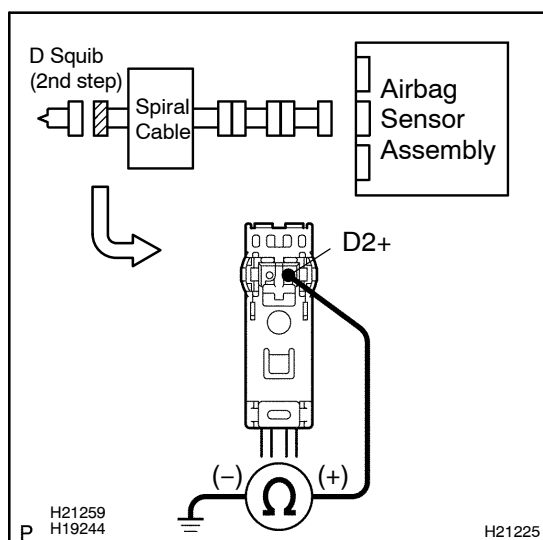

CHECK:

Measure the resistance between the body ground and D2+ of the black connector on the steering wheel pad (D squib (2nd step)) side between the airbag sensor assembly and the steering wheel pad (D squib (2nd step)).

OK:


Resistance: 1 MΩ or Higher

NG

Go to step 5.

OK

3 Check airbag sensor assembly.

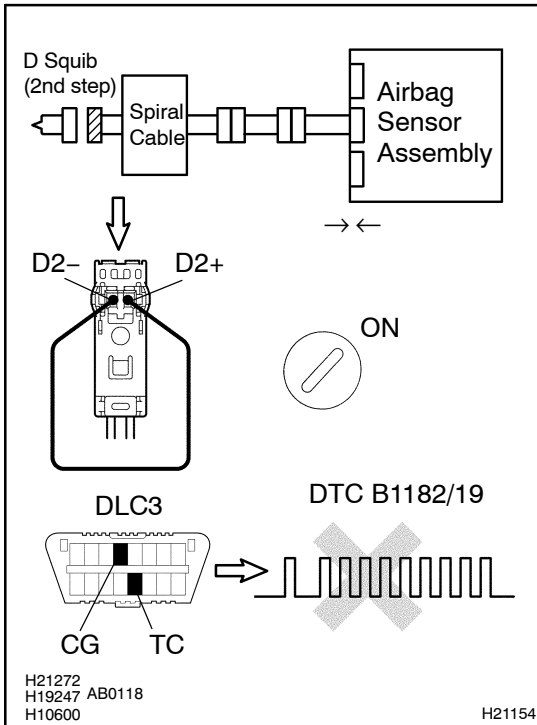

PREPARATION:

- Connect the connector to the airbag sensor assembly.
- Using a service wire, connect D2+ and D2- of the black connector on the steering wheel pad (D squib (2nd step)) side between the airbag sensor assembly and the steering wheel pad (D squib (2nd step)).
- Connect the negative (-) terminal cable to the battery, and wait at least for 2 seconds.

CHECK:

- Turn the ignition switch to ON, and wait at least for 10 seconds.
- Clear the DTC stored in memory (See page [DI-523](#)).
- Turn the ignition switch to LOCK, and wait at least for 10 seconds.
- Turn the ignition switch to ON, and wait at least for 10 seconds.
- Check the DTC (See page [DI-523](#)).

OK:

DTC B1182/19 is not output.


HINT:

Codes other than code B1182/19 may be output at this time, but they are not relevant to this check.

NG

Replace airbag sensor assembly.

OK

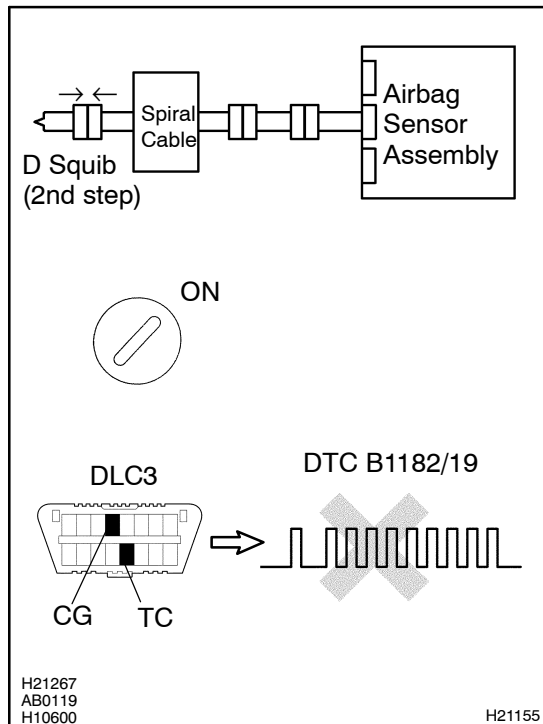4 Check D squib (2nd step).**PREPARATION:**

- Turn the ignition switch to LOCK.
- Disconnect the negative (-) terminal cable from the battery, and wait at least for 90 seconds.
- Connect the steering wheel pad (D squib (2nd step)) to the spiral cable.
- Connect the negative (-) terminal cable to the battery, and wait at least for 2 seconds.

CHECK:

- Turn the ignition switch to ON, and wait at least for 10 seconds.
- Clear the DTC stored in memory (See page [DI-523](#)).
- Turn the ignition switch to LOCK, and wait at least for 10 seconds.
- Turn the ignition switch to ON, and wait at least for 10 seconds.
- Check the DTC (See page [DI-523](#)).


OK:**DTC B1182/19 is not output.****HINT:**

Codes other than code B1182/19 may be output at this time, but they are not relevant to this check.

NG**Replace steering wheel pad (D squib (2nd step)).****OK**

From the results of the above inspection, the malfunctioning part can now be considered normal. To make sure of this, use the simulation method to check. If the malfunctioning part can not be detected by the simulation method, replace all SRS components including the wire harness.

5 Check spiral cable.

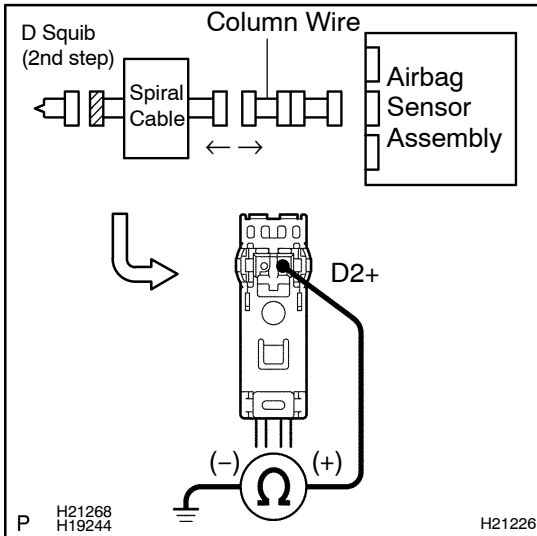

PREPARATION:

Disconnect the spiral cable connector from the column wire.

CHECK:

Measure the resistance between the body ground and D2+ of the black spiral cable connector on the steering wheel pad (D squib (2nd step)) side.

OK:


Resistance: 1 MΩ or Higher

NG

Replace spiral cable.

OK

6 Check column wire.

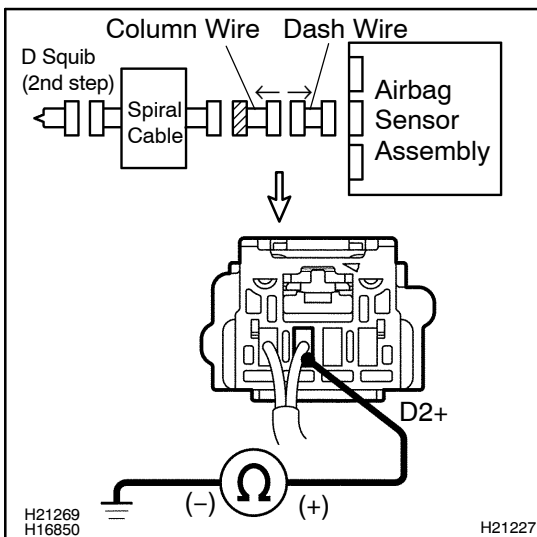

PREPARATION:

Disconnect the column wire connector from the dash wire.

CHECK:

Measure the resistance between the body ground and D2+ of the column wire connector on the spiral cable side.

OK:


Resistance: 1 MΩ or Higher

NG

Replace column wire.

OK

7

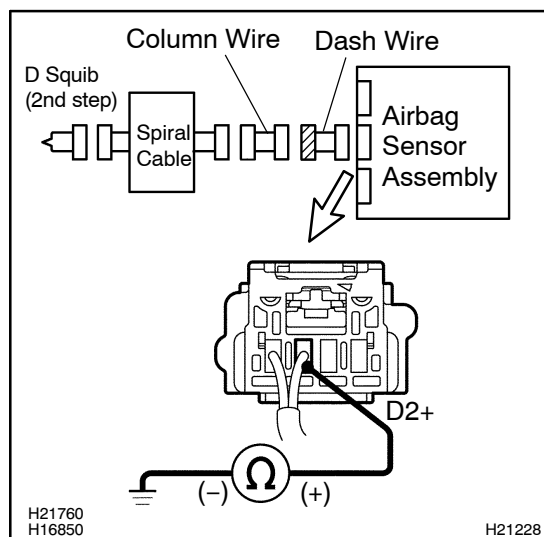Check dash wire.**CHECK:**

Measure the resistance between the body ground and D2+ of the dash wire connector on the column wire side.

OK:

Resistance: 1 MΩ or Higher

NG**Replace dash wire.****OK**

From the results of the above inspection, the malfunctioning part can now be considered normal. To make sure of this, use the simulation method to check. If the malfunctioning part can not be detected by the simulation method, replace all SRS components including the wire harness.