

PRE-CHECK

1. CHARACTERS OF WIRELESS DOOR LOCK

- (a) The operation distance changes according to how customers hold the transmitter or where it is used.
- (b) Because of using the very weak radio wave, if there is a strong wave or noise on the frequency being used, the operation distance may become shorter.

2. WIRELESS DOOR LOCK BASIC FUNCTION

- (a) Stand on the driver's side. Stay 1 m away from the vehicle.
- (b) Turn the transmitter toward the vehicle and press any one of the transmission switched for 1 sec.

3. INSPECT WIRELESS DOOR LOCK DIAGNOSIS MODE

- (a) Start up diagnosis mode.

HINT:

Follow the method below.

- (1) Insert the ignition key into the ignition key cylinder.
- (2) Remove the ignition key from the ignition key cylinder.
- (3) Insert the key into the ignition switch.
- (4) Turn the ignition switch ON once within 5 sec.
- (5) Repeat turning the ignition switch OFF → ON 9 times within 30 sec.
- (6) Enter the diagnosis mode, and make sure that the taillight lights up.

	Within. 5secs.	Within. 30secs.
Key Plate Inserted		
Key Plate Not Inserted		
ON	1	2 3 9 10
OFF		
	Once	9 times

I20790

- (b) Finishing the Diagnosis Mode.
During the Diagnosis mode, turn the ignition switch OFF → ON to go back to the normal mode.
At this time make sure that the taillight lights up.

(1) LOCK switch

ON

OFF

0.13secs. 0.5secs.

(2) UNLOCK switch

ON

OFF

0.13secs. 0.25secs. 0.5secs.

(3) Luggage door switch

ON

OFF

0.5secs. 0.5secs.

(4) Disagreement of recognition code or rolling code.

ON

OFF

While receiving

I20456

(c) Diagnosis Mode Check.

HINT:

Check how the taillight lights up when pressing each transmitter switch.

(1) LOCK switch

(2) UNLOCK switch

(3) Luggage door switch

(4) Disagreement of recognition code or rolling code.

HINT:

If (4) is detected in the Diagnosis Check, conduct the recognition code registration.

(5) No response from the taillight.

HINT:

Conduct the following checks.

- Wireless door lock transmitter.
- Wireless door lock receiver.

4. INSPECT WIRELESS DOOR LOCK TRANSMITTER OPERATION

HINT:

Refer to "3. REPLACE TRANSMITTER (LITHIUM) BATTERY".

- Using a screwdriver, remove the 2 screws and cover.
- Remove the battery (lithium battery).

(c) Install a new or normal battery (lithium battery).

HINT:

When a new or normal battery can not be obtained, connect 2 new 1.5 V batteries in series, connect the battery (+) to the battery receptacle side terminal and battery (–) to the bottom terminal, then apply 3 V voltage to the transmitter.

- In the location where is approx. 1 m away from driver's outside handle in the right direction, face the key plate of the transmitter to the vehicle, and check the transmitter operation when pressing transmission switch of the transmitter body.

Standard:

- Remote control of vehicle door lock can be operated.
- LED lights up more than once.

I04149

HINT:

- The minimum operation distance differs according to operator, the way of holding the transmitter, and location.
- As weak wave is used, operation distance might be shortened when noise is detected in strong wave or used frequency.

(e) Install the battery (lithium battery).

(f) Install a cover so that O-ring is not distorted or slipped off.


(g) Using a screwdriver, tighten the 2 screws.

5. CHECK BATTERY CAPACITY

HINT:

- Make sure to use the TOYOTA electrical tester.
- With the battery unloaded, judge can not be made whether the battery is available or not on the test.
- When the transmitter is faulty, the energy amount left in the battery might not be checked correctly.
- On the lithium battery used for the transmitter, the voltage more than 2.5 V with the battery unloaded is shown on the tester until the energy is completely consumed.

Accordingly when inspecting the energy amount left in the battery, it is necessary to measure the voltage when the battery is loaded. (1.2 k Ω).

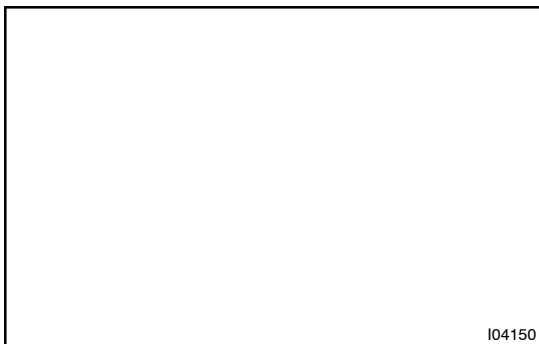

I04150

- (a) Remove the 2 screws and cover using a (–) driver.
- (b) Remove the battery (lithium battery) from the transmitter.
- (c) Connect the lead to the (–) terminal of the transmitter and install the battery.



I07522

- (d) Connect the (+) tester to the (+) battery (lithium battery), and (–) tester to the lead respectively.
- (e) Press one of the transmitting switches on the transmitter for approx. 1 second.
- (f) Press the transmitting switch on the transmitter again to check the voltage.

Standard: 2.1 V or more

HINT:

- When the temperature of the battery is low, the judge can not be made correctly.
When the outcome of the test is less than 2.1 V, conduct the test again after leaving the battery in the place at 18 °C for more than 30 minutes.
 - By auto power off function, the voltage becomes no load voltage (more than 2.5 V) condition 20 seconds after the switch was pressed.
Make sure to read the voltage before of it.
 - High voltage might be shown 1 to 2 times after leaving the battery, judge should be made with the voltage shown at the 3rd time or later.
- (g) Disconnect the lead.
- (h) Set the battery (lithium battery) in the transmitter.
- (i) Install the cover, so that the O-ring is not distorted or slipped off.
- (j) Using a screwdriver, tighten the 2 screws.

6. REPLACE TRANSMITTER (LITHIUM) BATTERY**NOTICE:**

Special caution should be taken for handling each component as they are precision electronic components.

- (a) Using a screwdriver, remove the screw and cover.


NOTICE:

Do not pry out the cover forcibly.

HINT:

Push the cover with a finger so that there becomes clearance, then pry out the cover from that clearance.


- (b) Remove the transmitter.

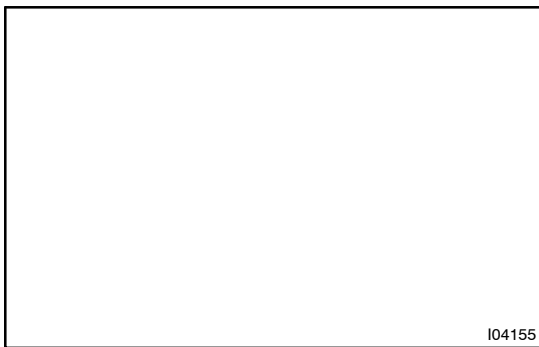

- (c) Using a screwdriver, remove the 2 screws and cover.
- (d) Remove the battery (lithium battery).

NOTICE:

- **Do not push the terminals with a finger.**
- **If prying up the battery (lithium battery) forcibly to remove, the terminals are deformed.**

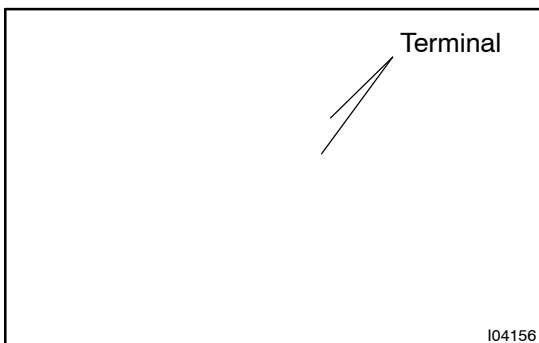

- (e) Install a battery (lithium battery) as shown in the illustration.

NOTICE:

Face the battery upward. Take care not to deform the terminals.

- (f) Check that O-ring is not distorted or slipped off, and install the cover.
- (g) Using a screwdriver, tighten the 2 screws.

NOTICE:

When the screws are tightened loosely, it might cause faulty contact of battery (lithium battery) and terminals.

- (h) Assemble the transmitter to the key plate and the cover.
- (i) Using a screwdriver, tighten the screw.

7. REPLACE DOOR CONTROL RECEIVER AND TRANSMITTER**NOTICE:**

When replacing the theft deterrent ECU or transmitter, registration of recognition code is necessary because they are provided as a single components.

- (a) Select the operation mode to perform from the following operation modes.
 - Add mode
 - Rewrite mode
 - Prohibition mode
 - Confirmation mode


HINT:

- The "Add mode" is for adding the newly recognized codes for registration while the already registered codes are retained. This mode is used when the transmitter is added. When the number of the registered codes exceeds 4 codes, the previously registered codes will be erased in order, starting from the first registered code.
 - The "Rewrite mode" is for erasing all the registered codes and registering newly recognized codes only. This mode is used when the transmitter or the door control receiver is replaced.
 - The "Prohibition mode" is for erasing all the registered codes to prohibit the wireless door lock operation. This mode is used when the transmitter is lost.
 - The "Confirmation mode" is for confirming the number of recognition codes that are registered. This mode is used to check the number of registered codes when new codes are added to the registration, etc.
- (b) Follow the chart on the following page to register the transmitter recognition code to the theft deterrent ECU.

HINT:

- When procedure is out of the specified, the registration operation is cancelled.
- Maximum 4 recognition codes can be registered.
- For the details of the registration procedure, see page [BE-93](#).

(c) By TOYOTA Hand-Held Tester

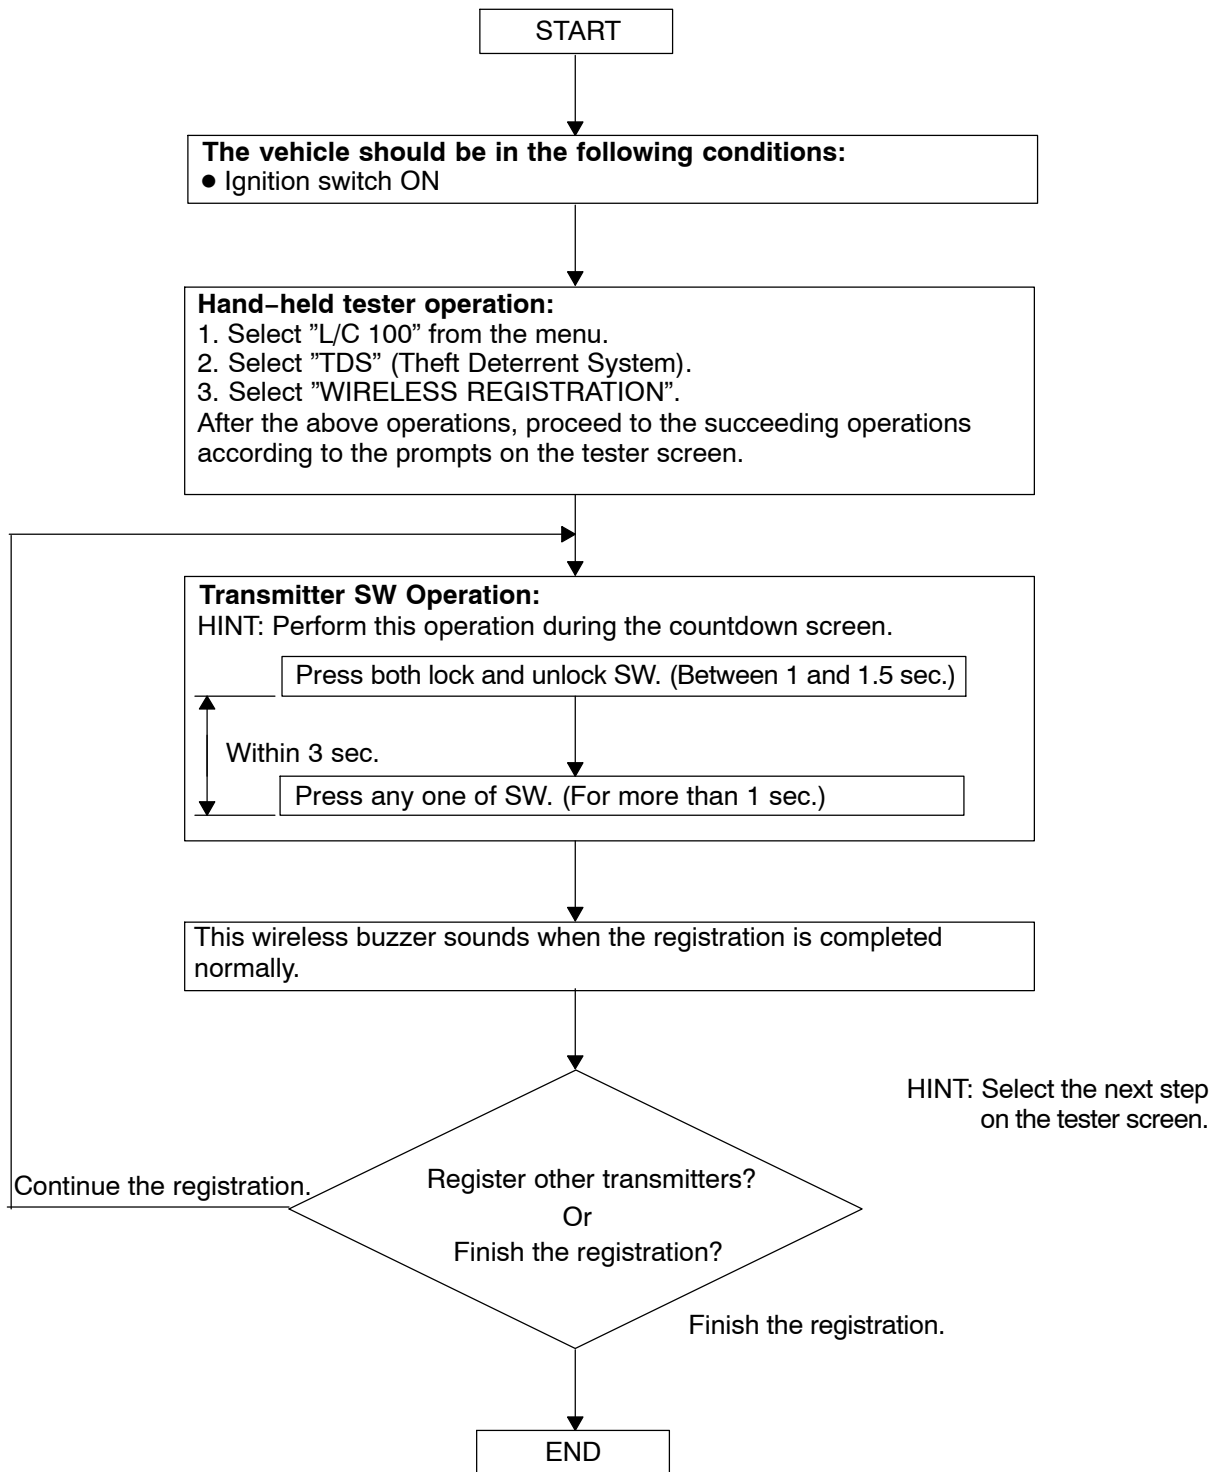**HINT:**

This page is to show briefly the registration procedure using the hand-held tester.

For detailed procedures, please refer to the prompts on the tester screen.

The number of currently registered codes can be checked out on the first screen of the WIRELESS REGISTRATION.

(d) By Switch Operation:

