



FRONT FENDER APRON FRONT EXTENSION (ASSY)

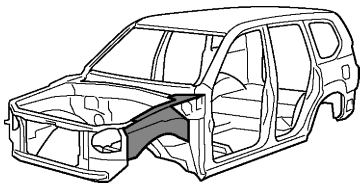


REMOVAL
With the radiator side support, front crossmember removed.

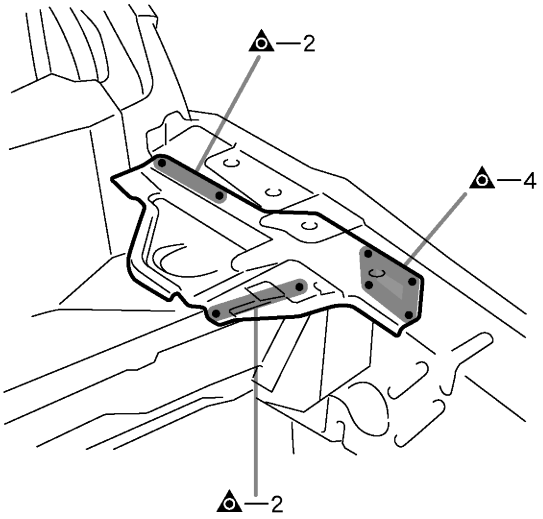

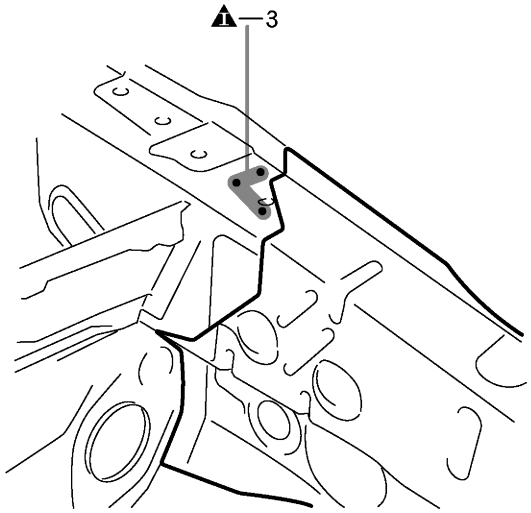


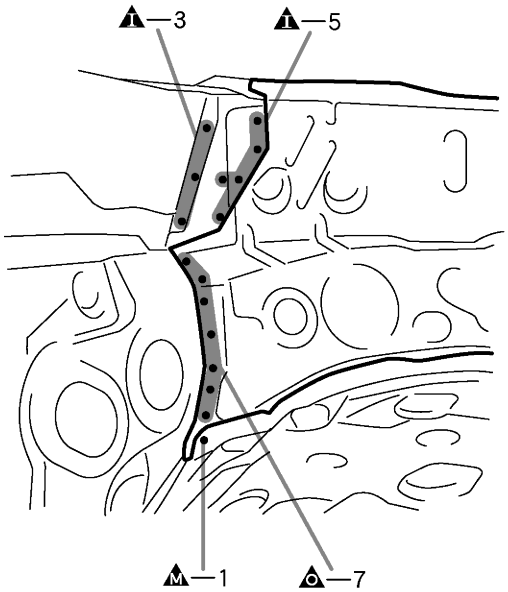


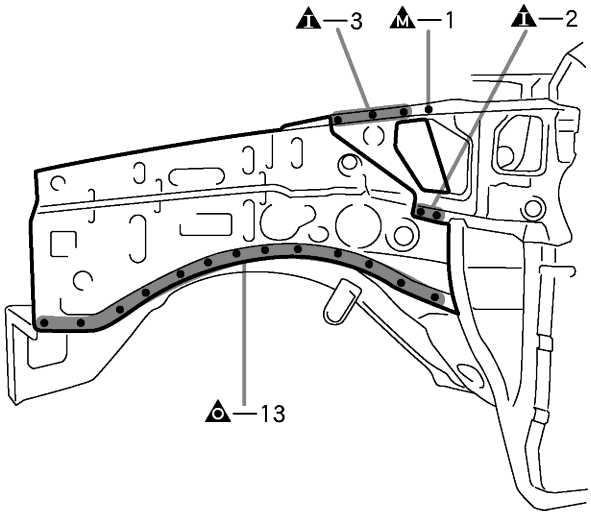



INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam with corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

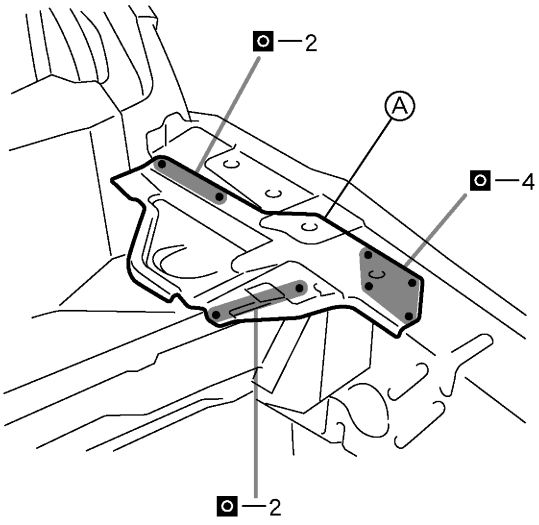

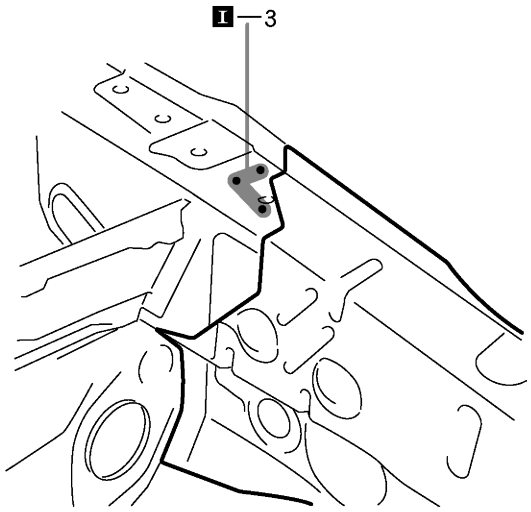

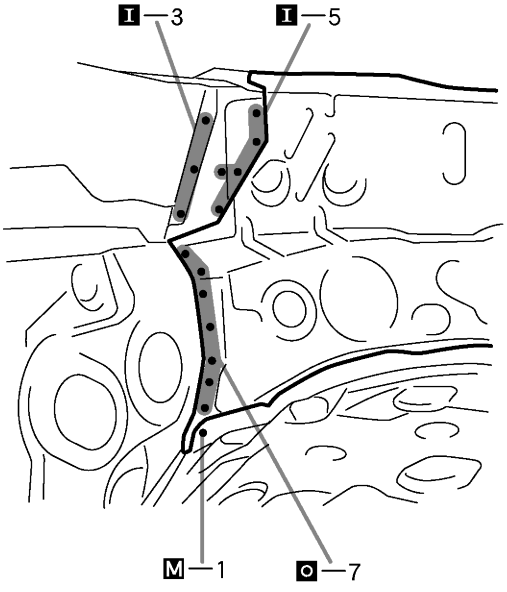


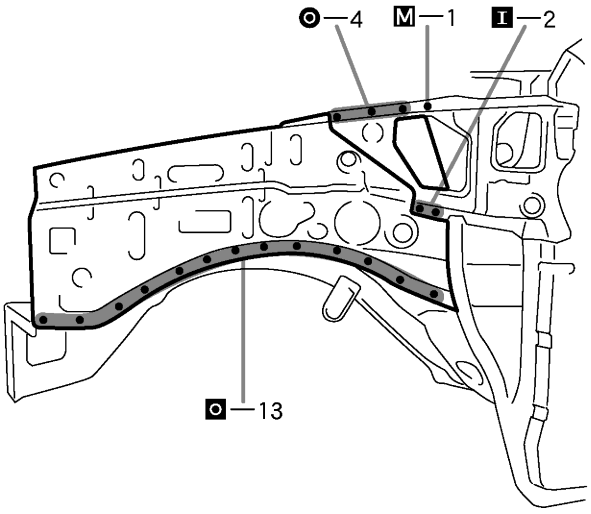

PART NAME

Ⓐ Cowl Top To Apron Brace

〔RH〕

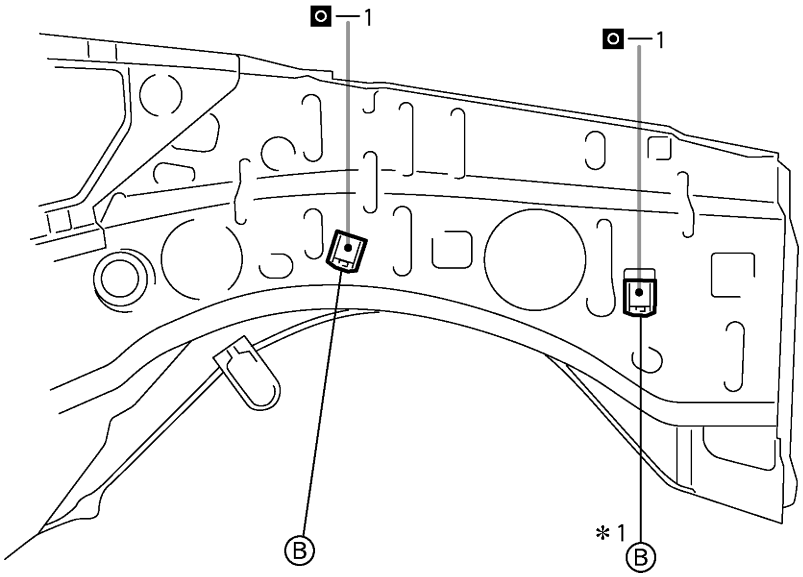

POINT

1 *1: 5L-E Engine Only

PART NAME

Ⓑ Radiator Support To Front Fender Bracket