


REAR FLOOR SIDE REAR CENTER MEMBER (ASSY): 5-Door



REMOVAL
With the body lower back panel, rear floor pan removed.

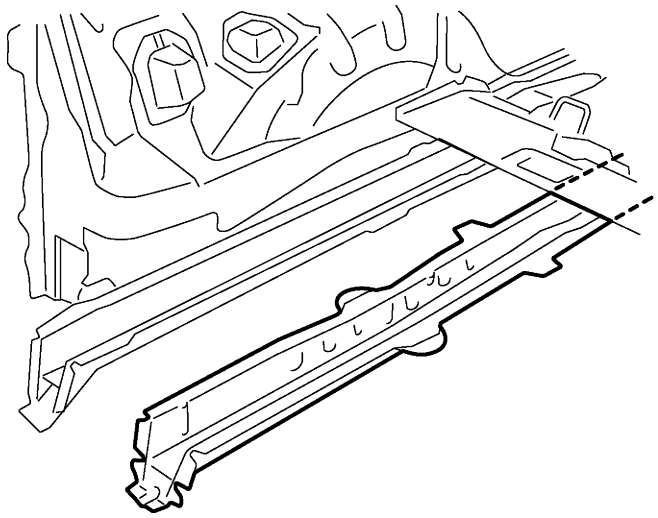

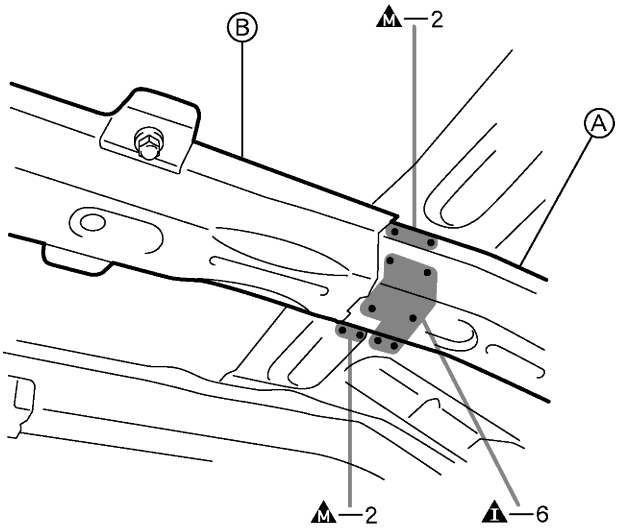


POINT
1 Leave the Ⓐ to the vehicle, remove the Ⓑ.

PART NAME
Ⓐ Rear Floor Side Member Center Reinforcement Ⓑ Rear Floor Side Rear Center Member

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam with corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

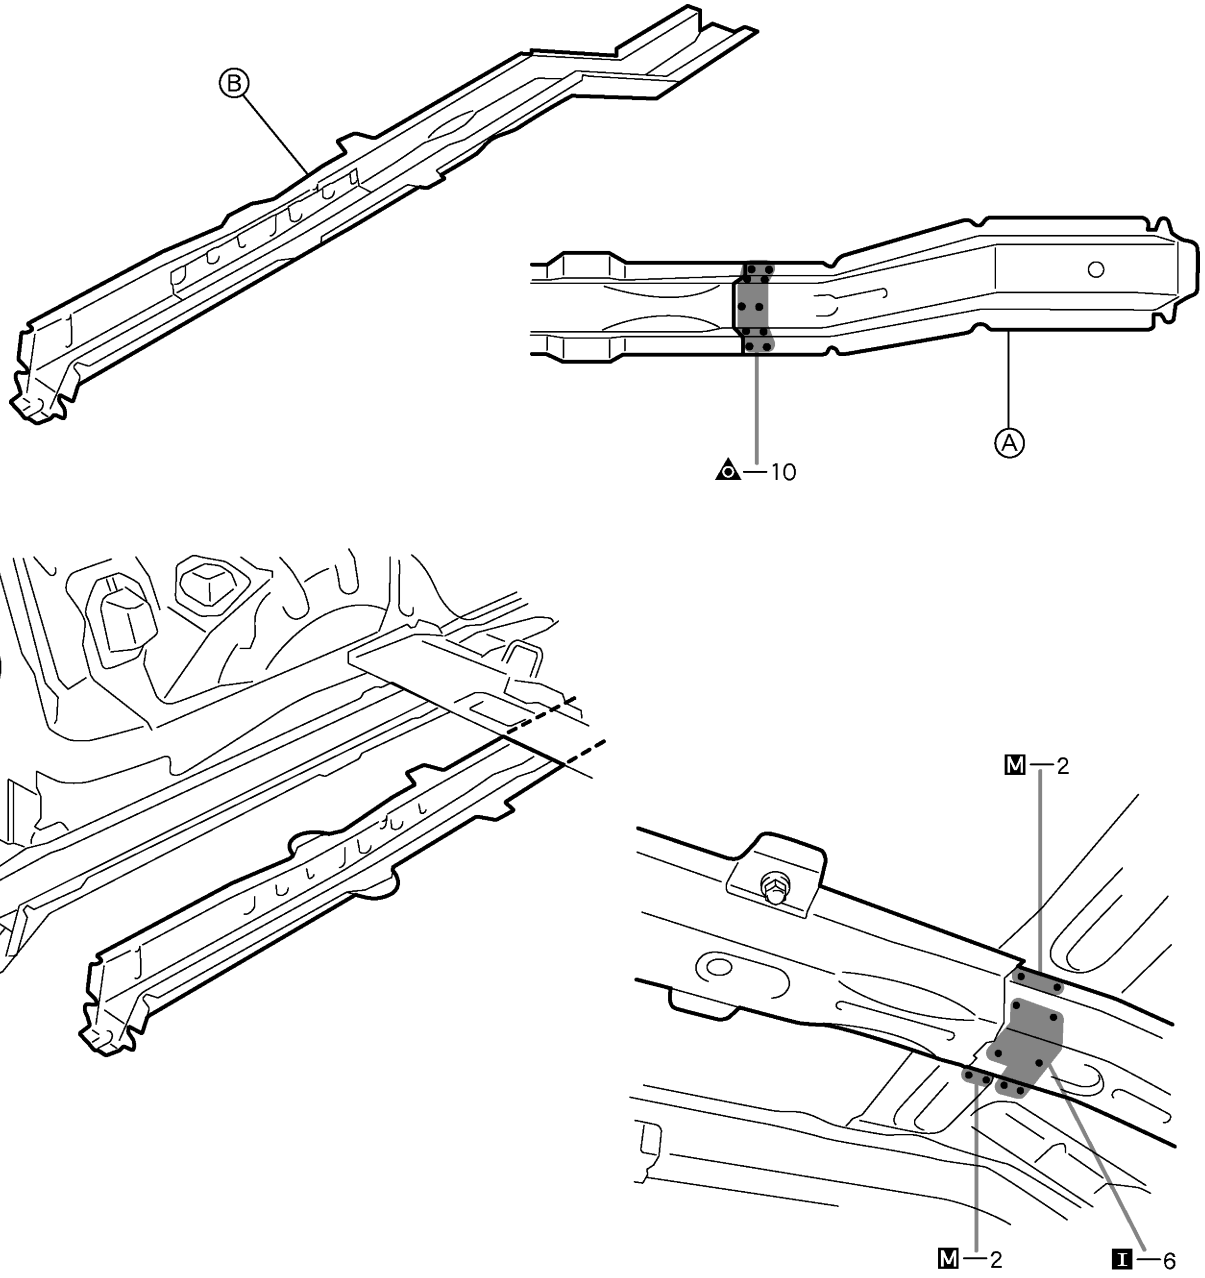

POINT

1 Remove the Ⓐ from the Ⓑ.

PART NAME

Ⓐ Rear Floor Side Member Center Reinforcement
Ⓑ Rear Floor Side Rear Center Member (New Parts)