


PARTIAL ENGINE ASSY (2TR–FE)


COMPONENTS

1421O–02

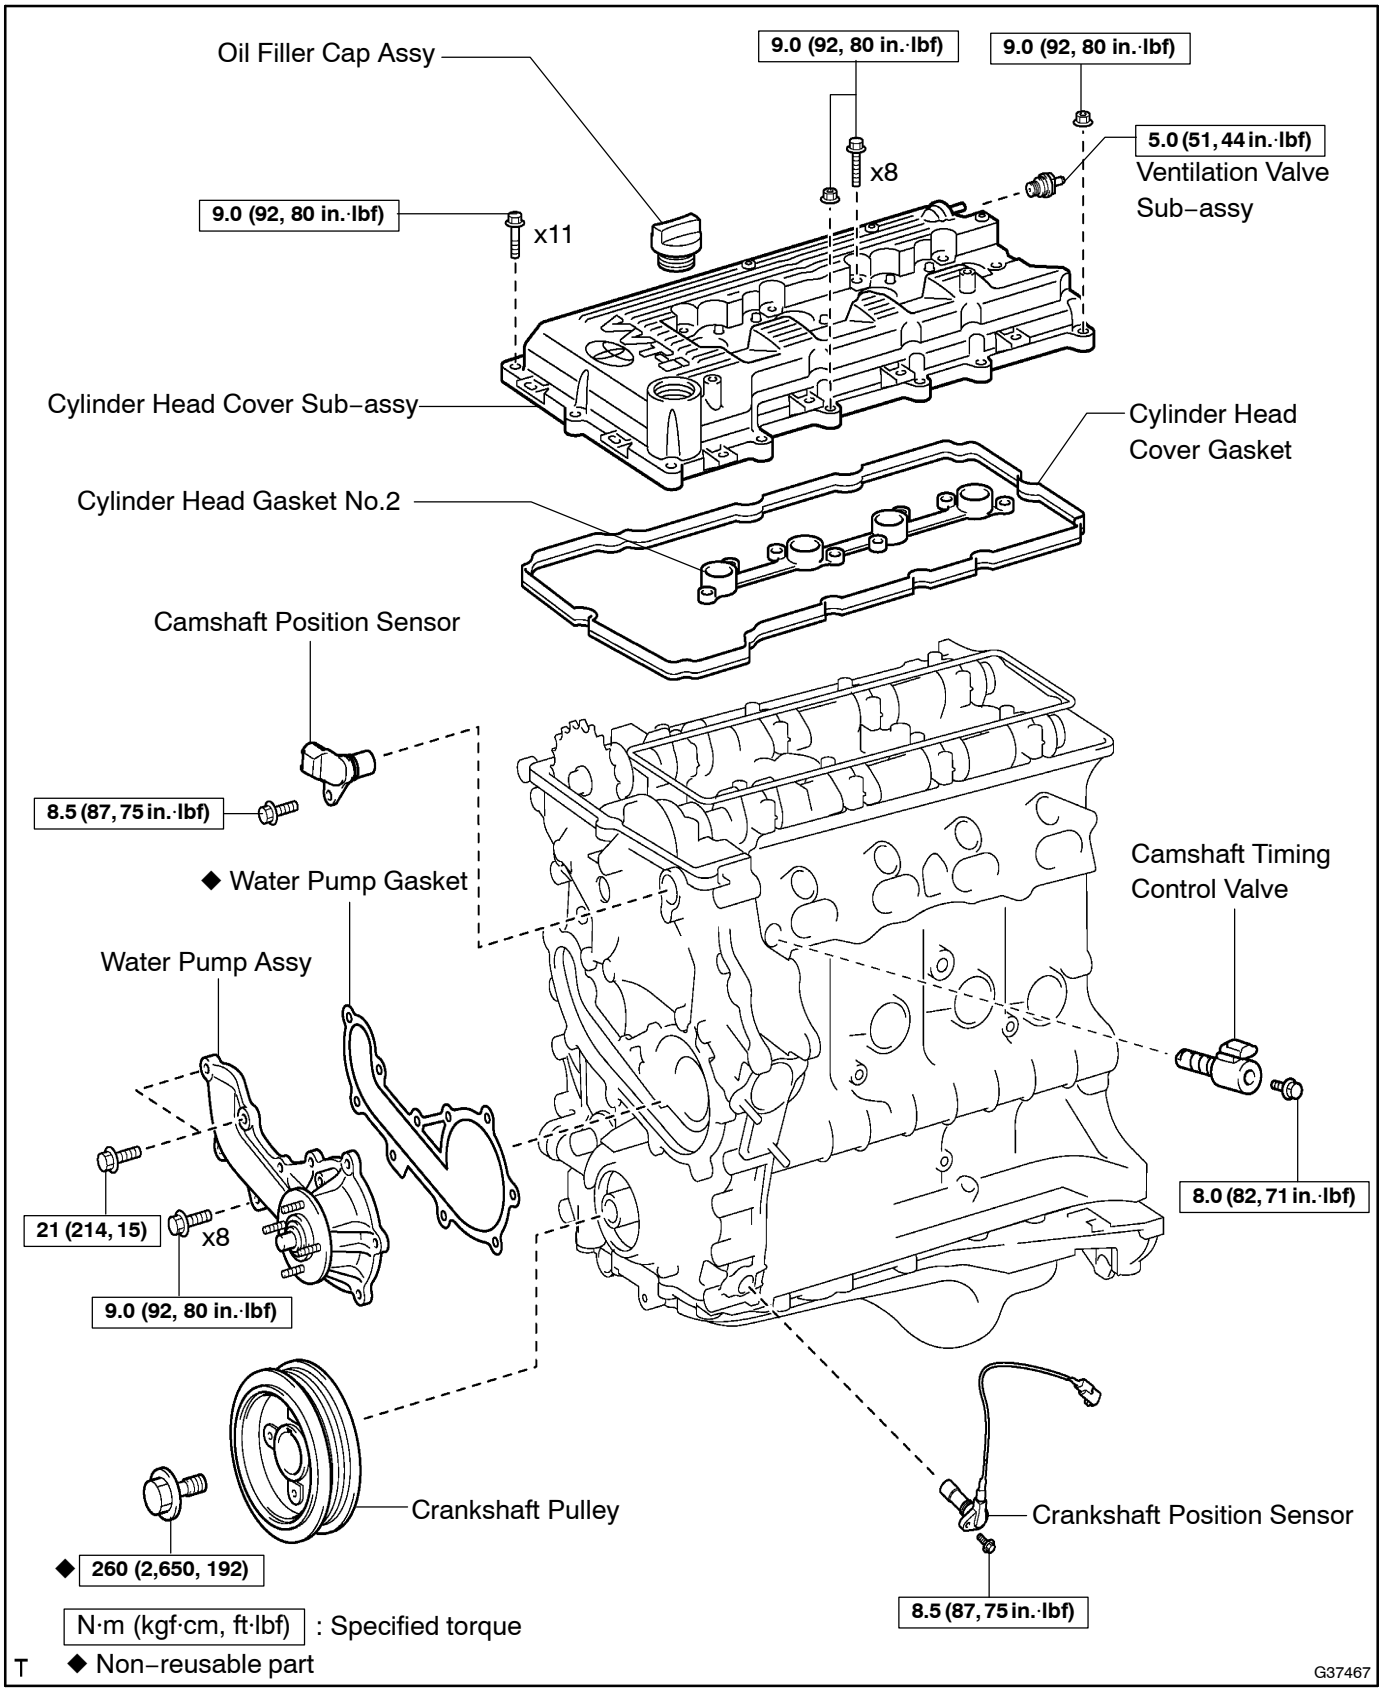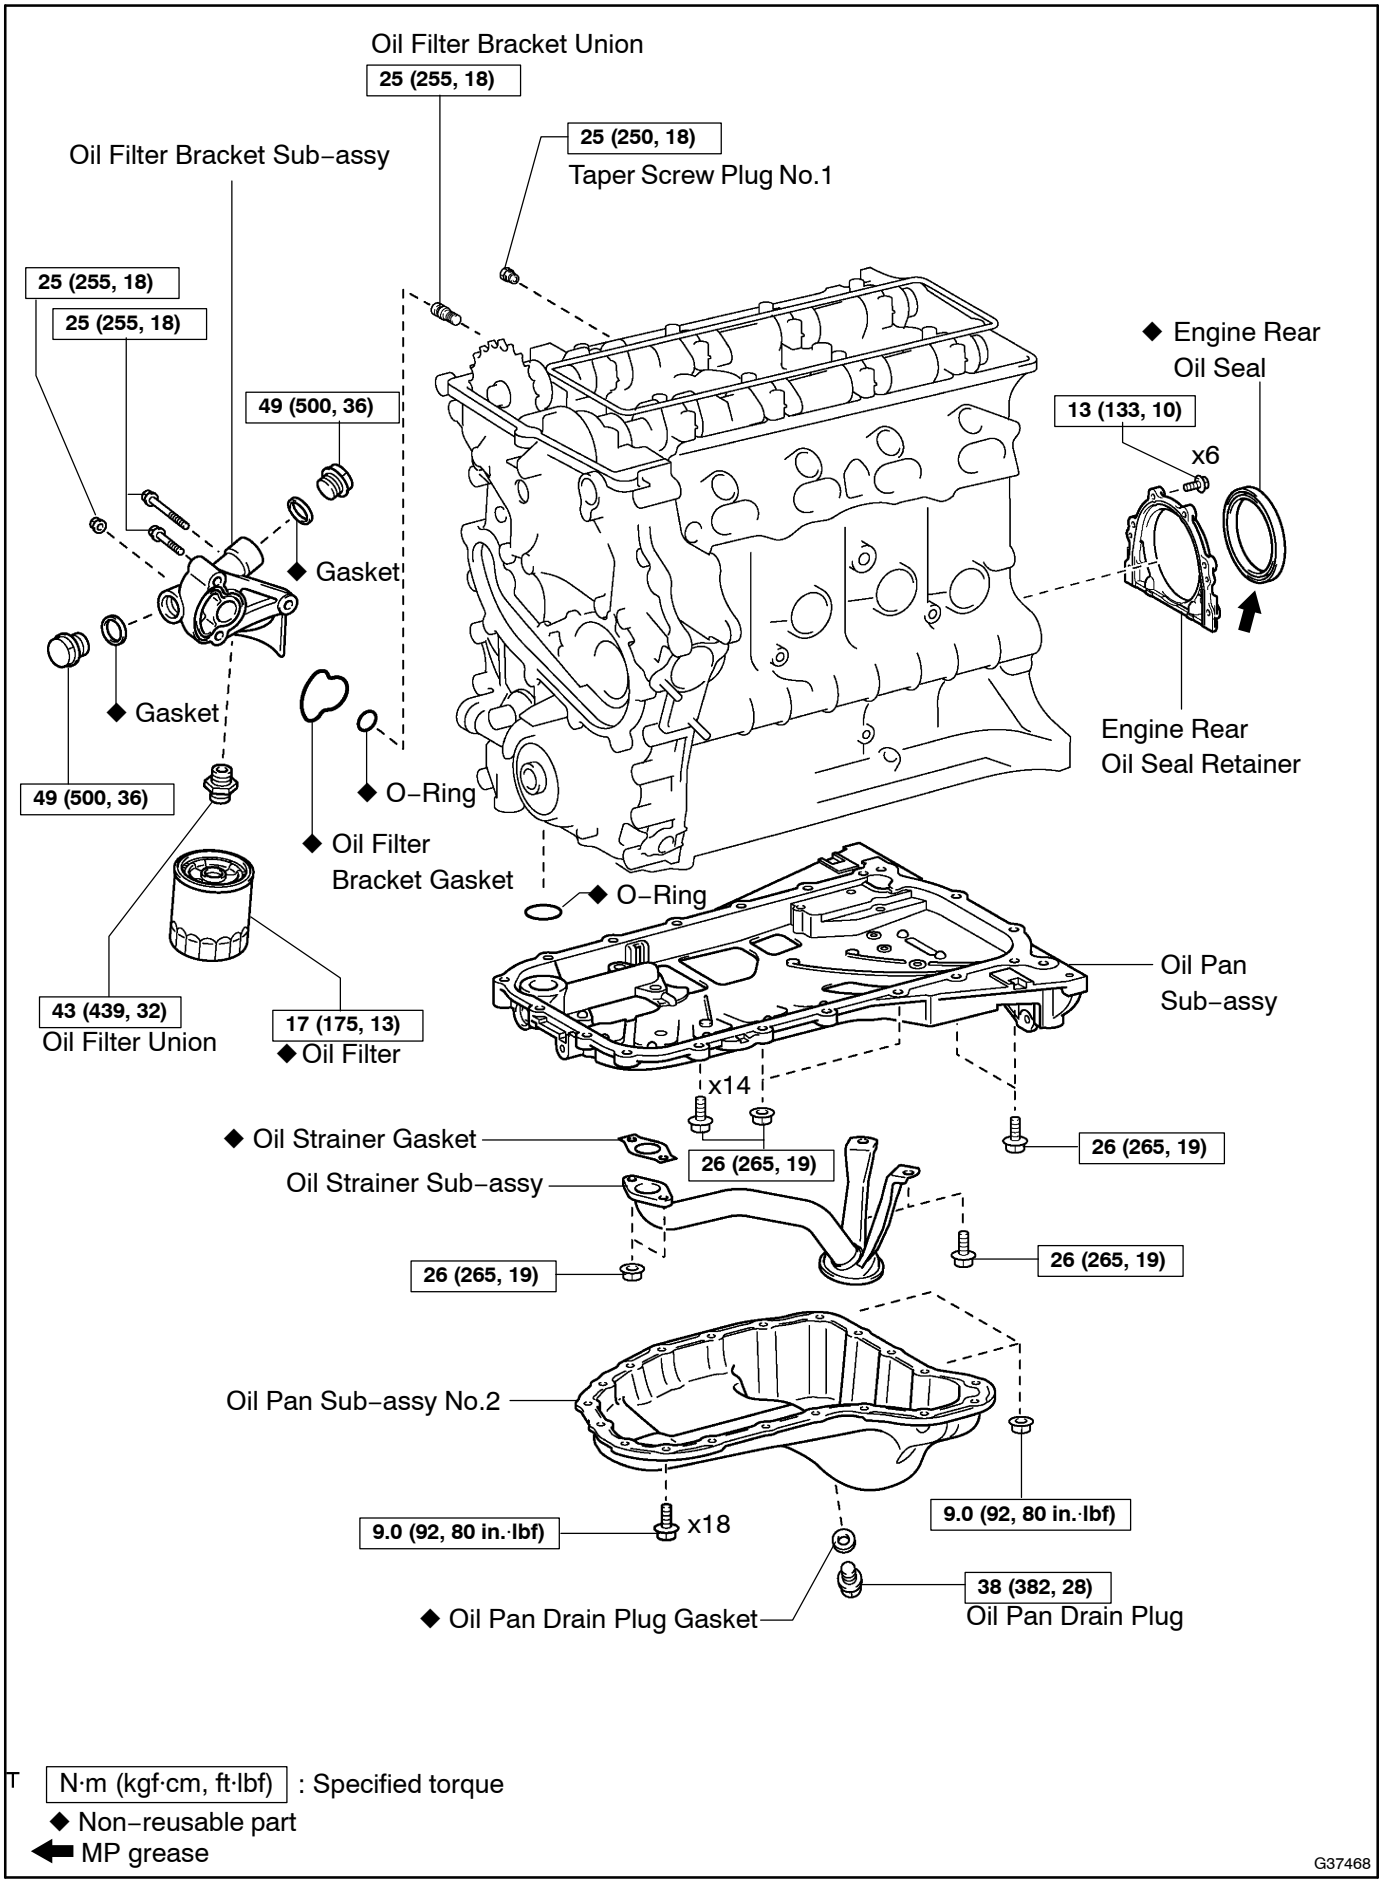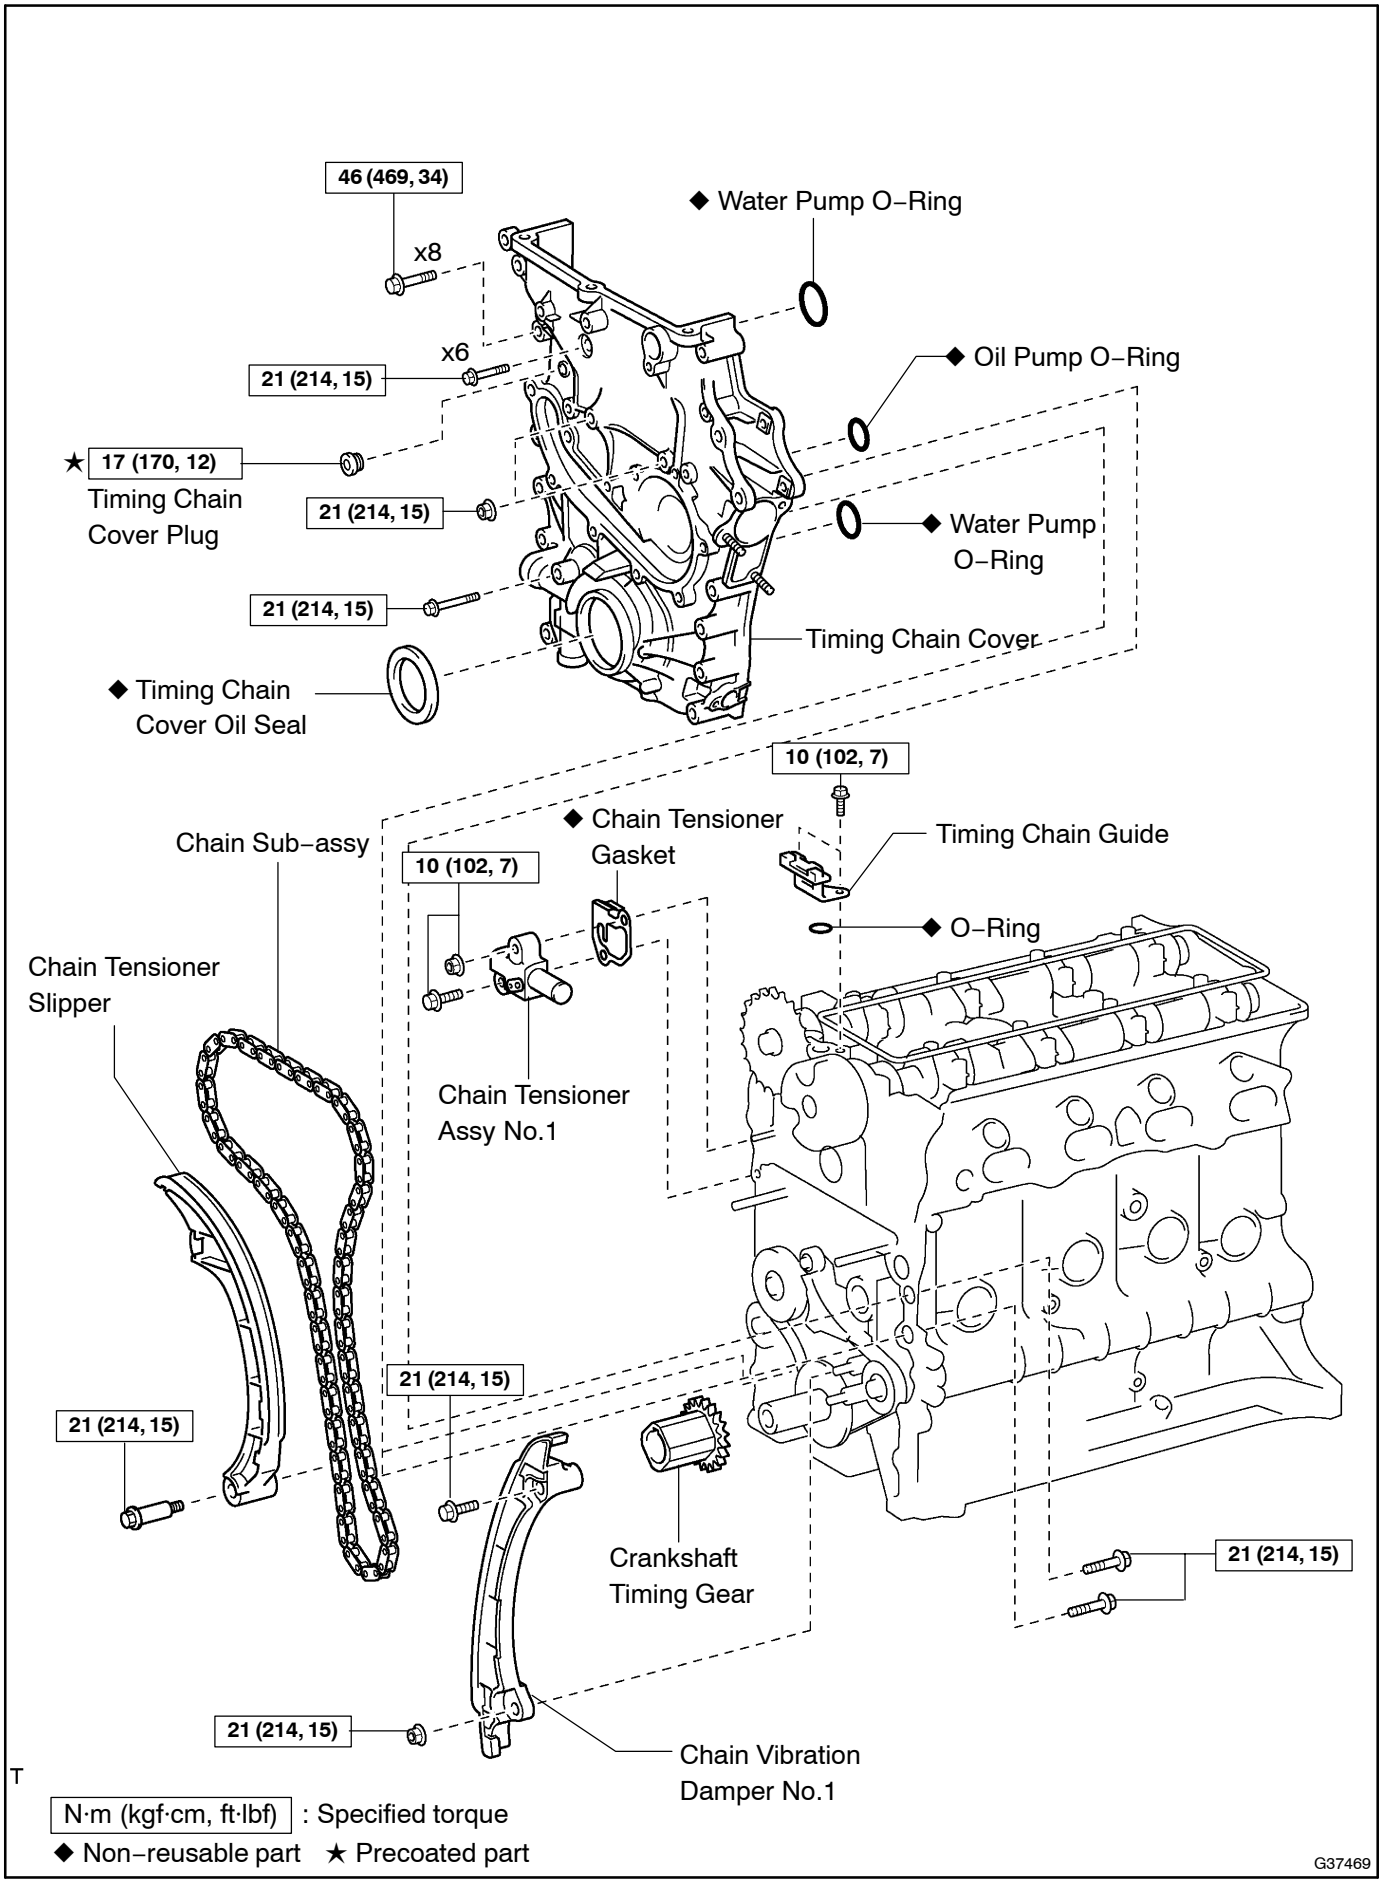


Oil Filter Bracket Union
25 (255, 18)
25 (250, 18)
Taper Screw Plug No.1
Oil Filter Bracket Sub–assy
25 (255, 18)
25 (255, 18)
49 (500, 36)
◆ Gasket
◆ Gasket
49 (500, 36)
◆ O–Ring
◆ Oil Filter Bracket Gasket
◆ O–Ring
43 (439, 32)
Oil Filter Union
17 (175, 13)
◆ Oil Filter
◆ Engine Rear Oil Seal
13 (133, 10)
x6
Engine Rear Oil Seal Retainer
Oil Pan Sub–assy
x14
◆ Oil Strainer Gasket
Oil Strainer Sub–assy
26 (265, 19)
26 (265, 19)
26 (265, 19)
26 (265, 19)
Oil Pan Sub–assy No.2
9.0 (92, 80 in.·lbf)
x18
9.0 (92, 80 in.·lbf)
38 (382, 28)
◆ Oil Pan Drain Plug Gasket
Oil Pan Drain Plug
T N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part
MP grease
G37468


46 (469, 34)
x8
x6
◆ Water Pump O–Ring
◆ Oil Pump O–Ring
21 (214, 15)
★ 17 (170, 12)
Timing Chain Cover Plug
21 (214, 15)
◆ Water Pump O–Ring
21 (214, 15)
Timing Chain Cover
◆ Timing Chain Cover Oil Seal
10 (102, 7)
◆ Chain Tensioner Gasket
Timing Chain Guide
Chain Sub–assy
10 (102, 7)
◆ O–Ring
Chain Tensioner Slipper
Chain Tensioner Assy No.1
21 (214, 15)
21 (214, 15)
Crankshaft Timing Gear
21 (214, 15)
21 (214, 15)
Chain Vibration Damper No.1
T
N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part ★ Precoated part
G37469

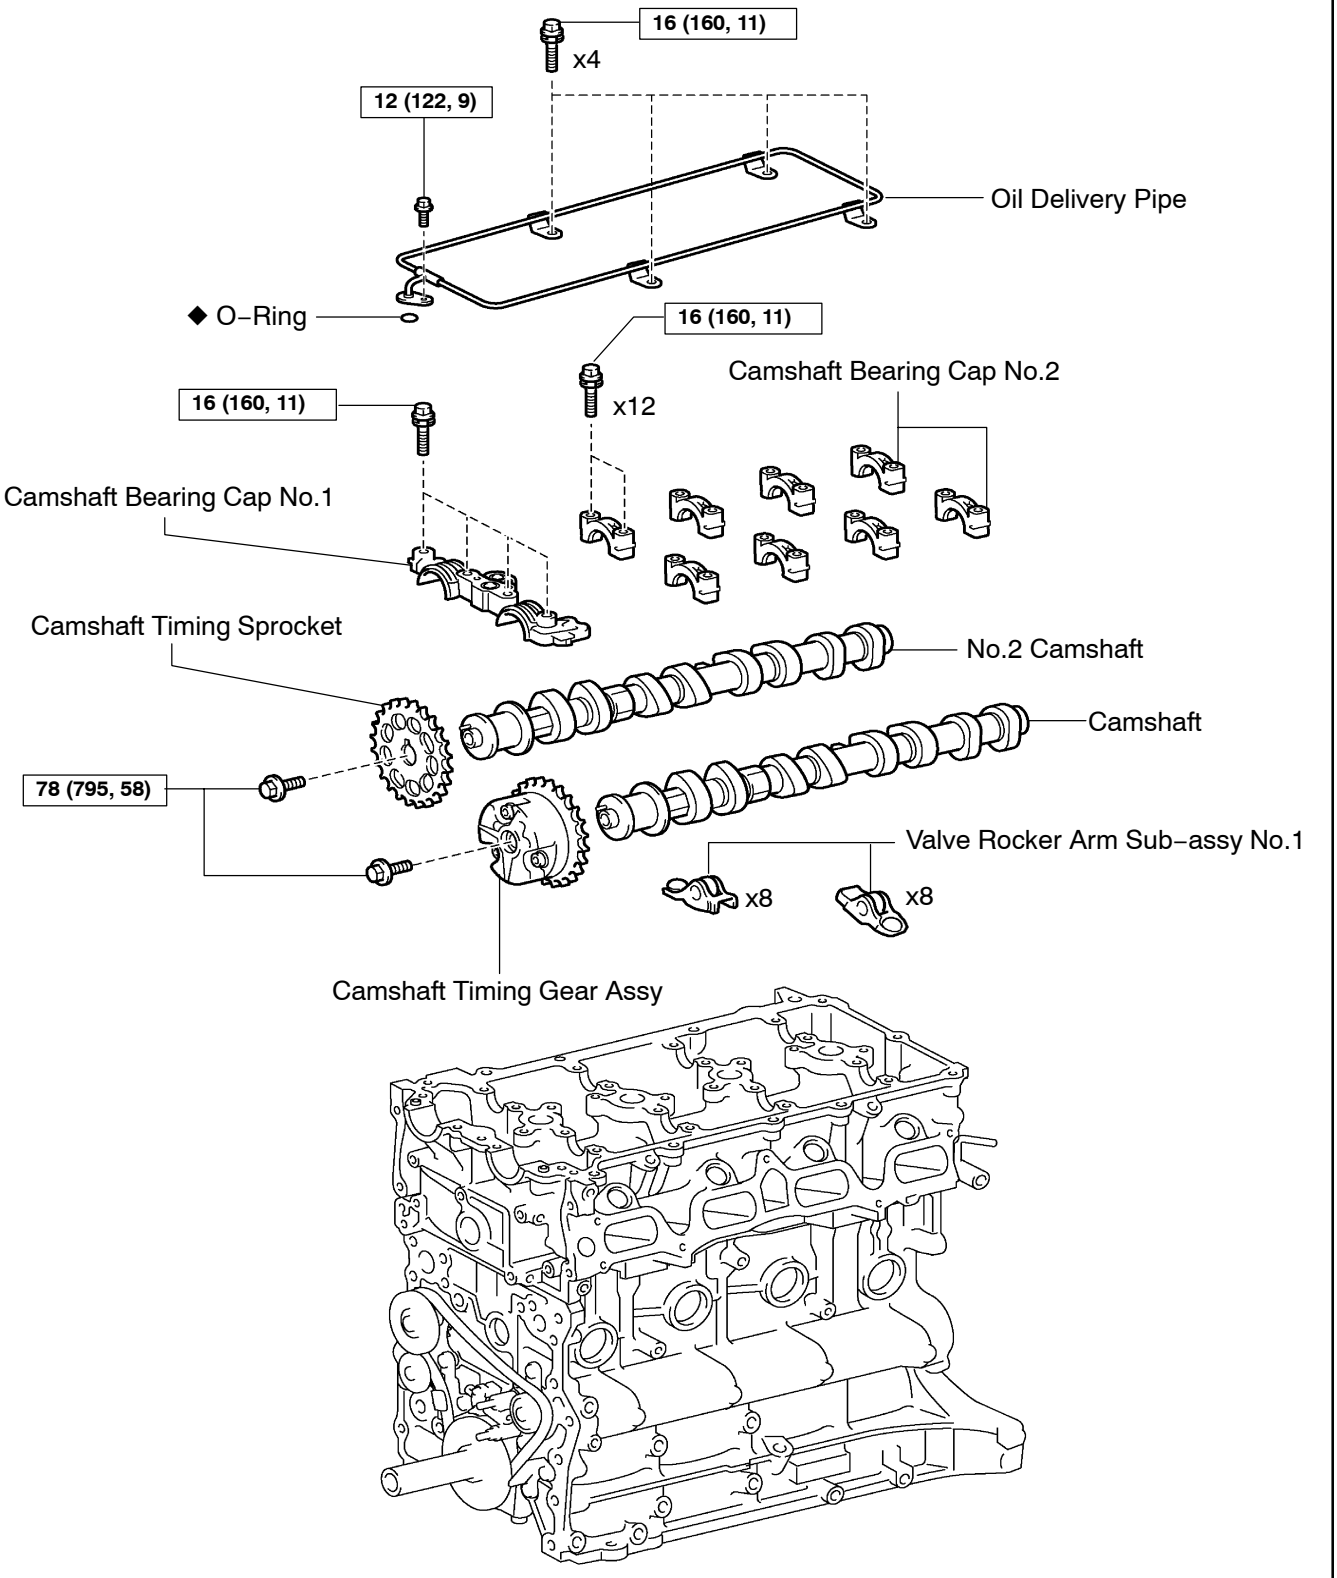


T

N·m (kgf·cm, ft·lbf) : Specified torque

◆ Non–reusable part

G37470

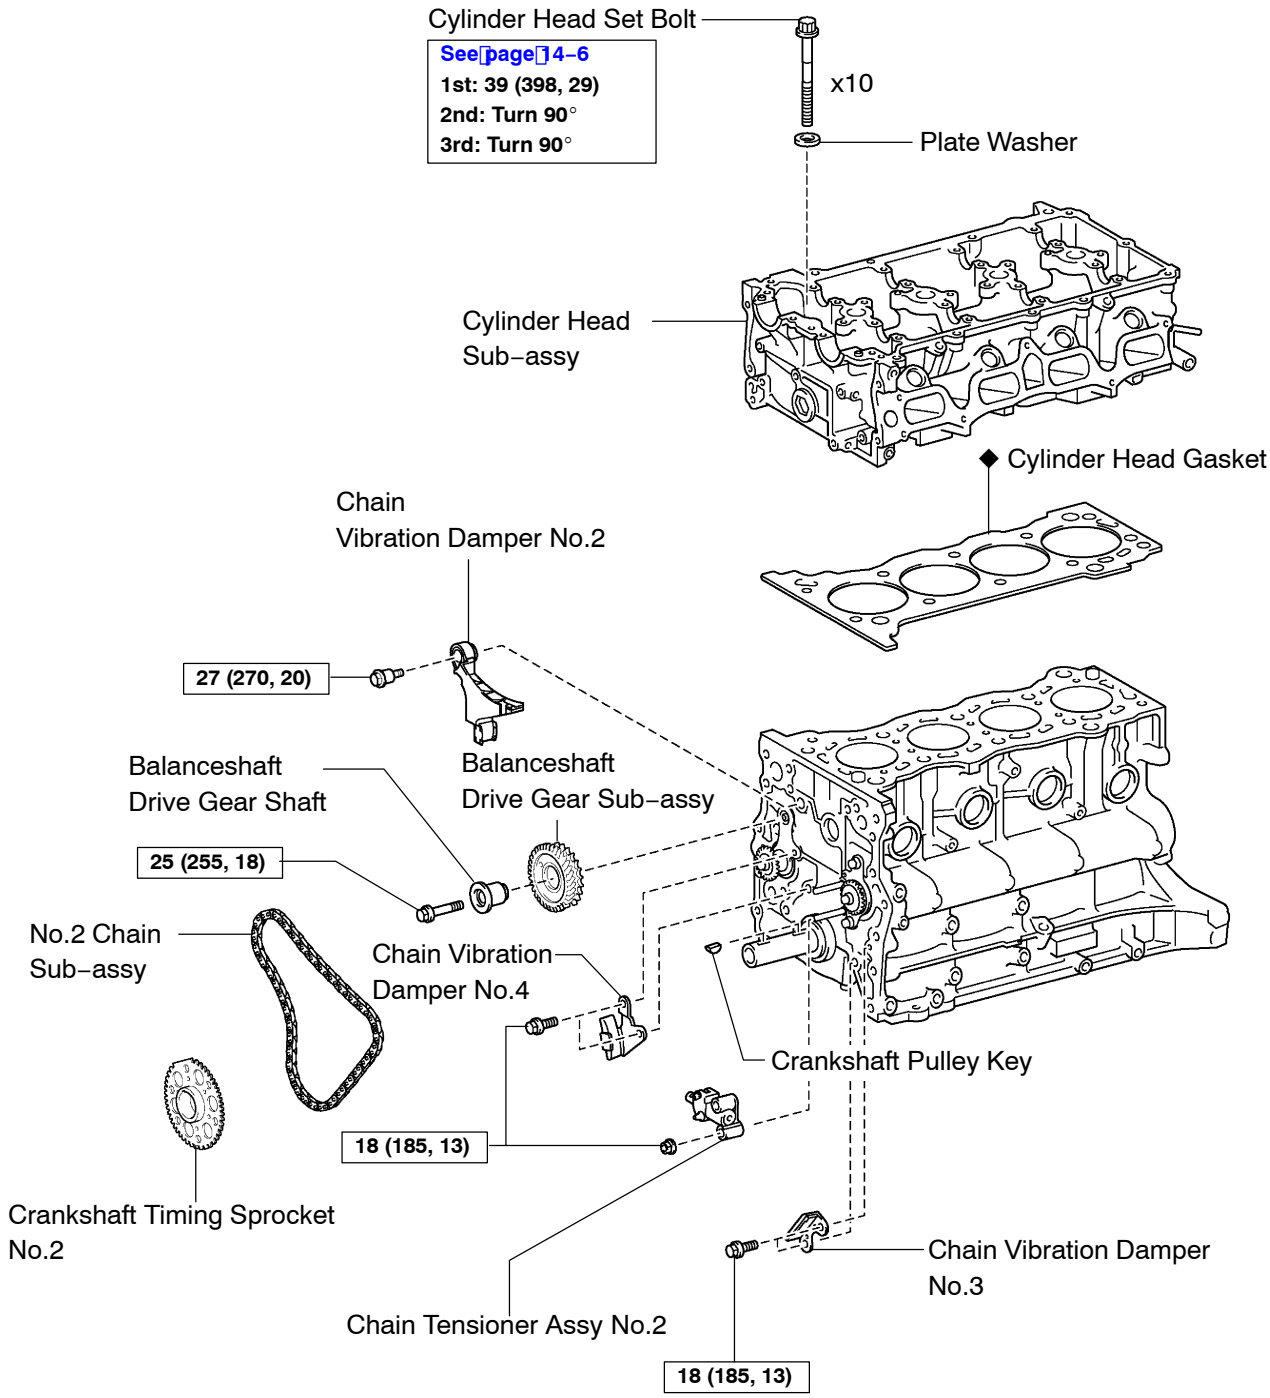

N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part

T

G37471