


CHAIN (3RZ–FE)

COMPONENTS

14121–02

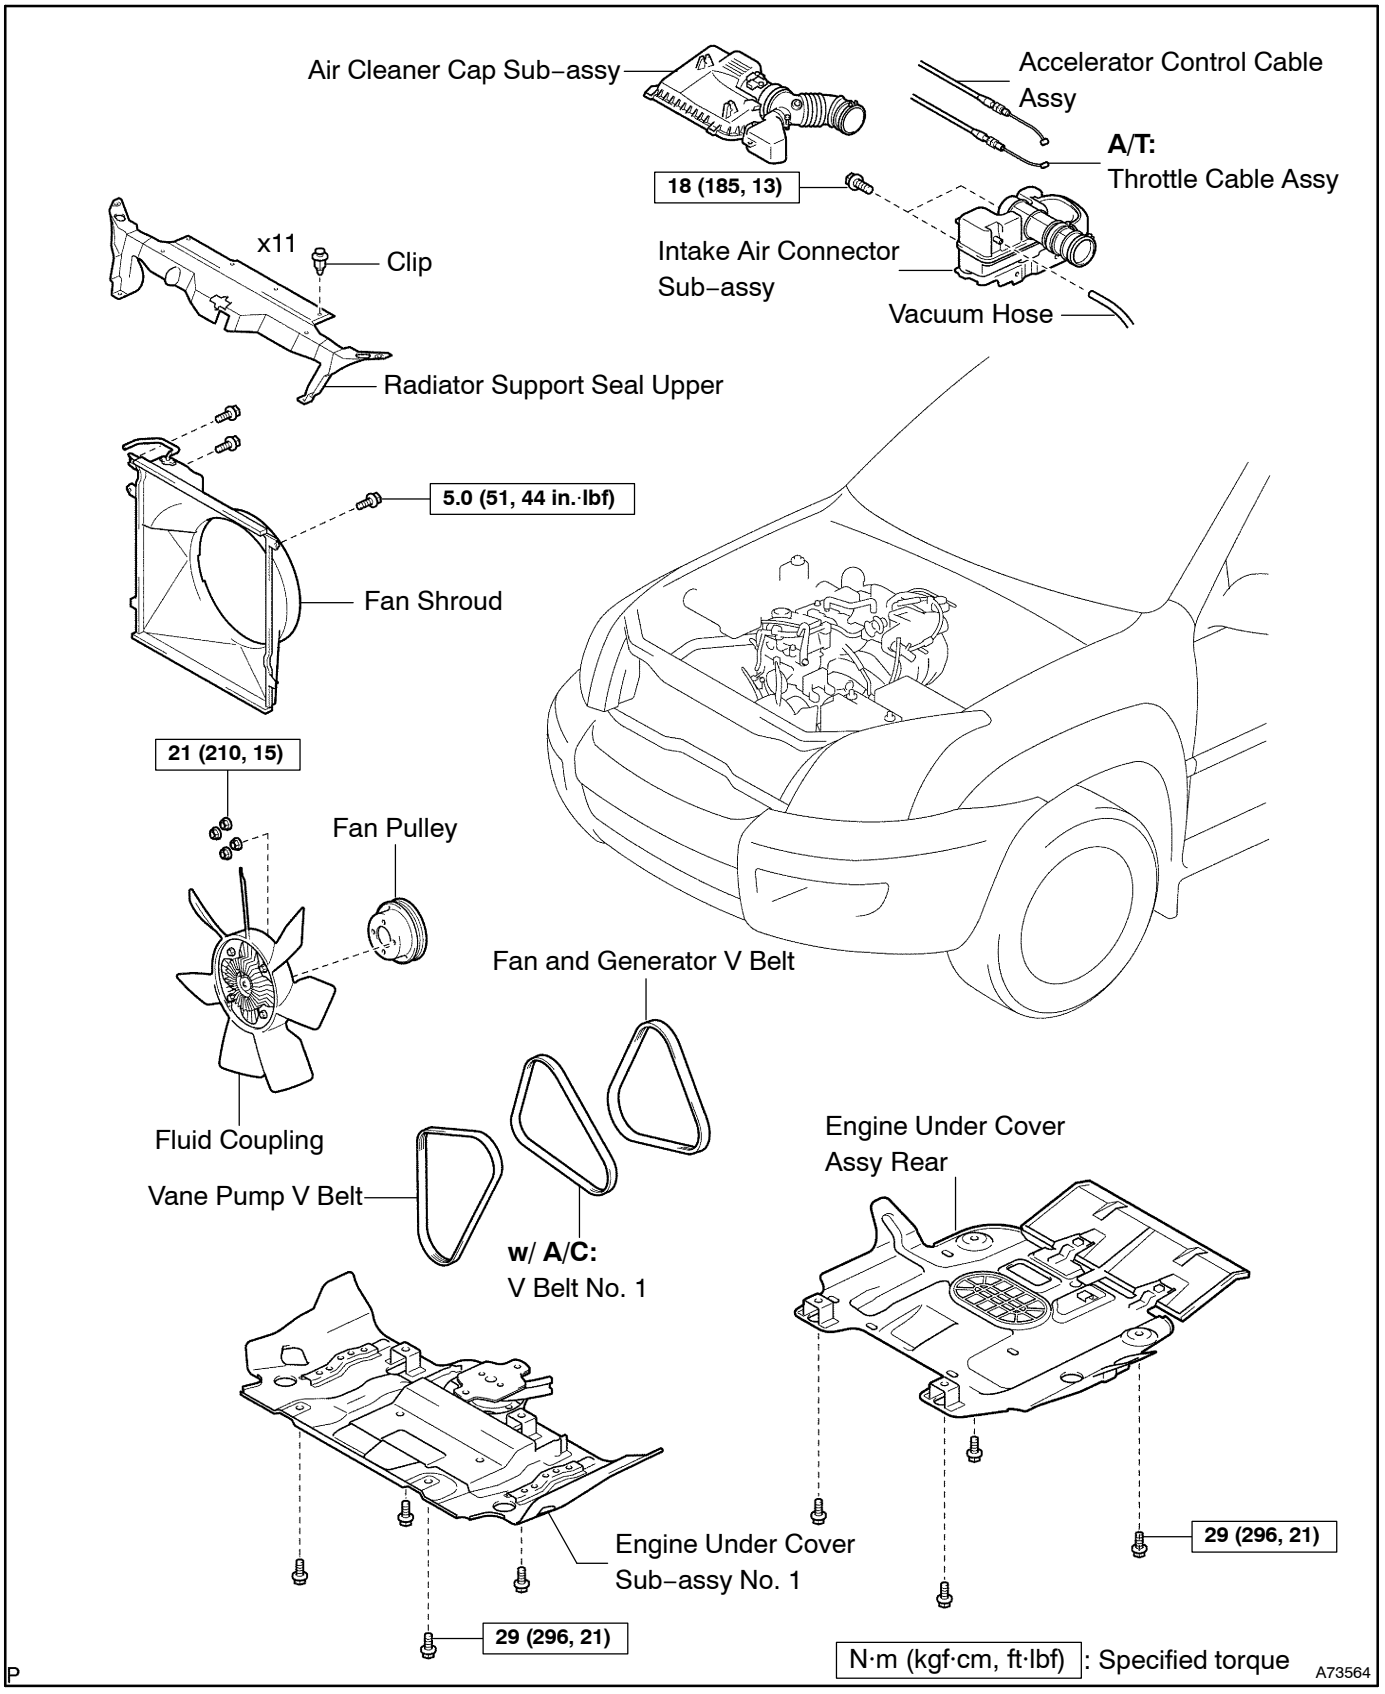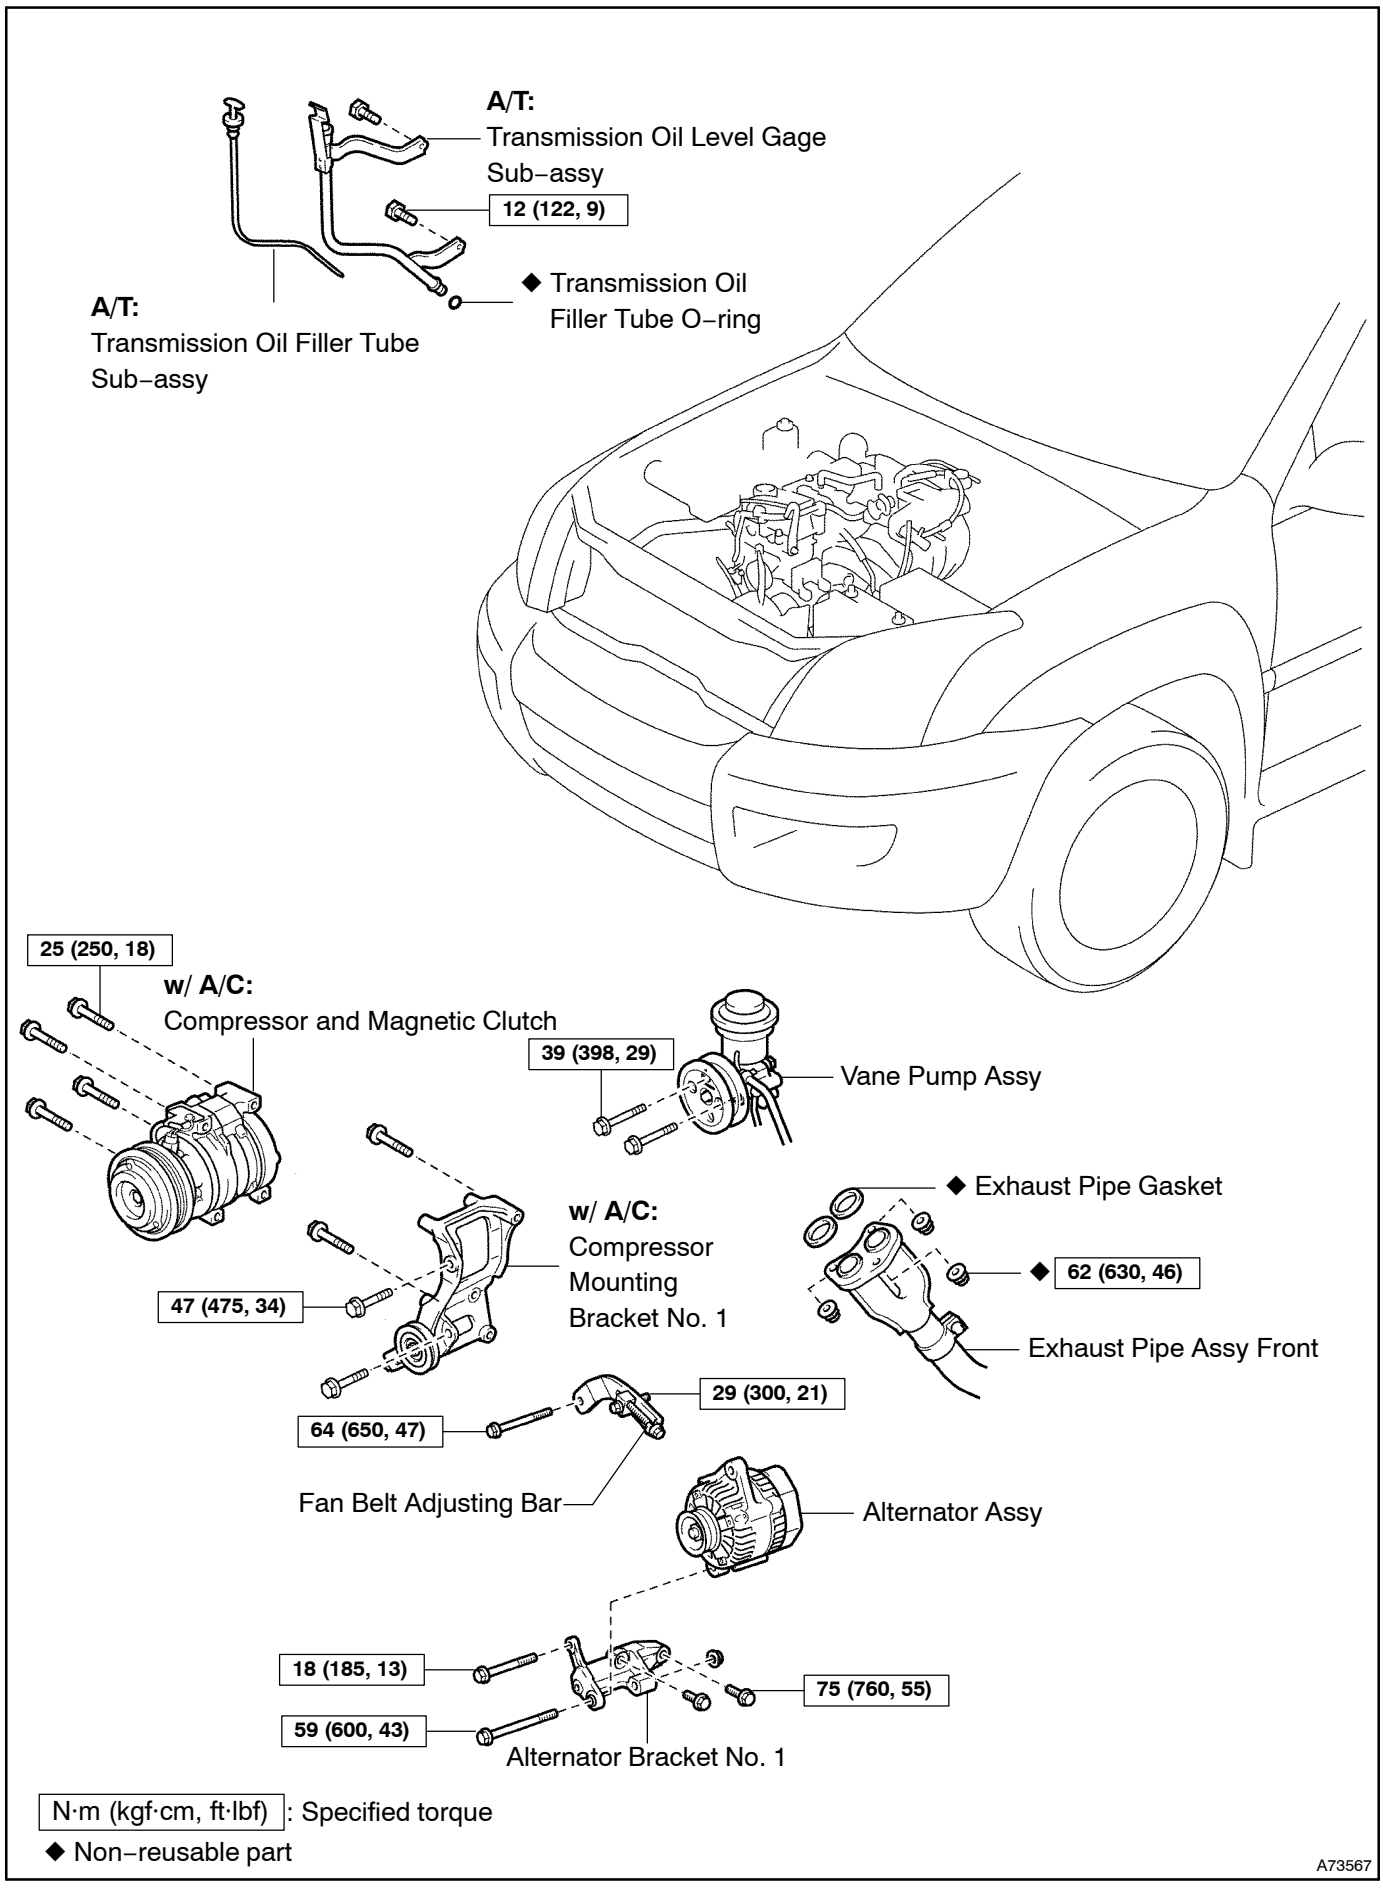


A/T:
Transmission Oil Level Gage Sub–assy
12 (122, 9)
◆ Transmission Oil Filler Tube O–ring
A/T:
Transmission Oil Filler Tube Sub–assy
25 (250, 18)
w/ A/C:
Compressor and Magnetic Clutch
39 (398, 29)
Vane Pump Assy
◆ Exhaust Pipe Gasket
w/ A/C:
Compressor Mounting Bracket No. 1
47 (475, 34)
◆ 62 (630, 46)
Exhaust Pipe Assy Front
29 (300, 21)
64 (650, 47)
Fan Belt Adjusting Bar
Alternator Assy
18 (185, 13)
75 (760, 55)
59 (600, 43)
Alternator Bracket No. 1
N·m (kgf·cm, ft·lbf): Specified torque
◆ Non–reusable part
A73567

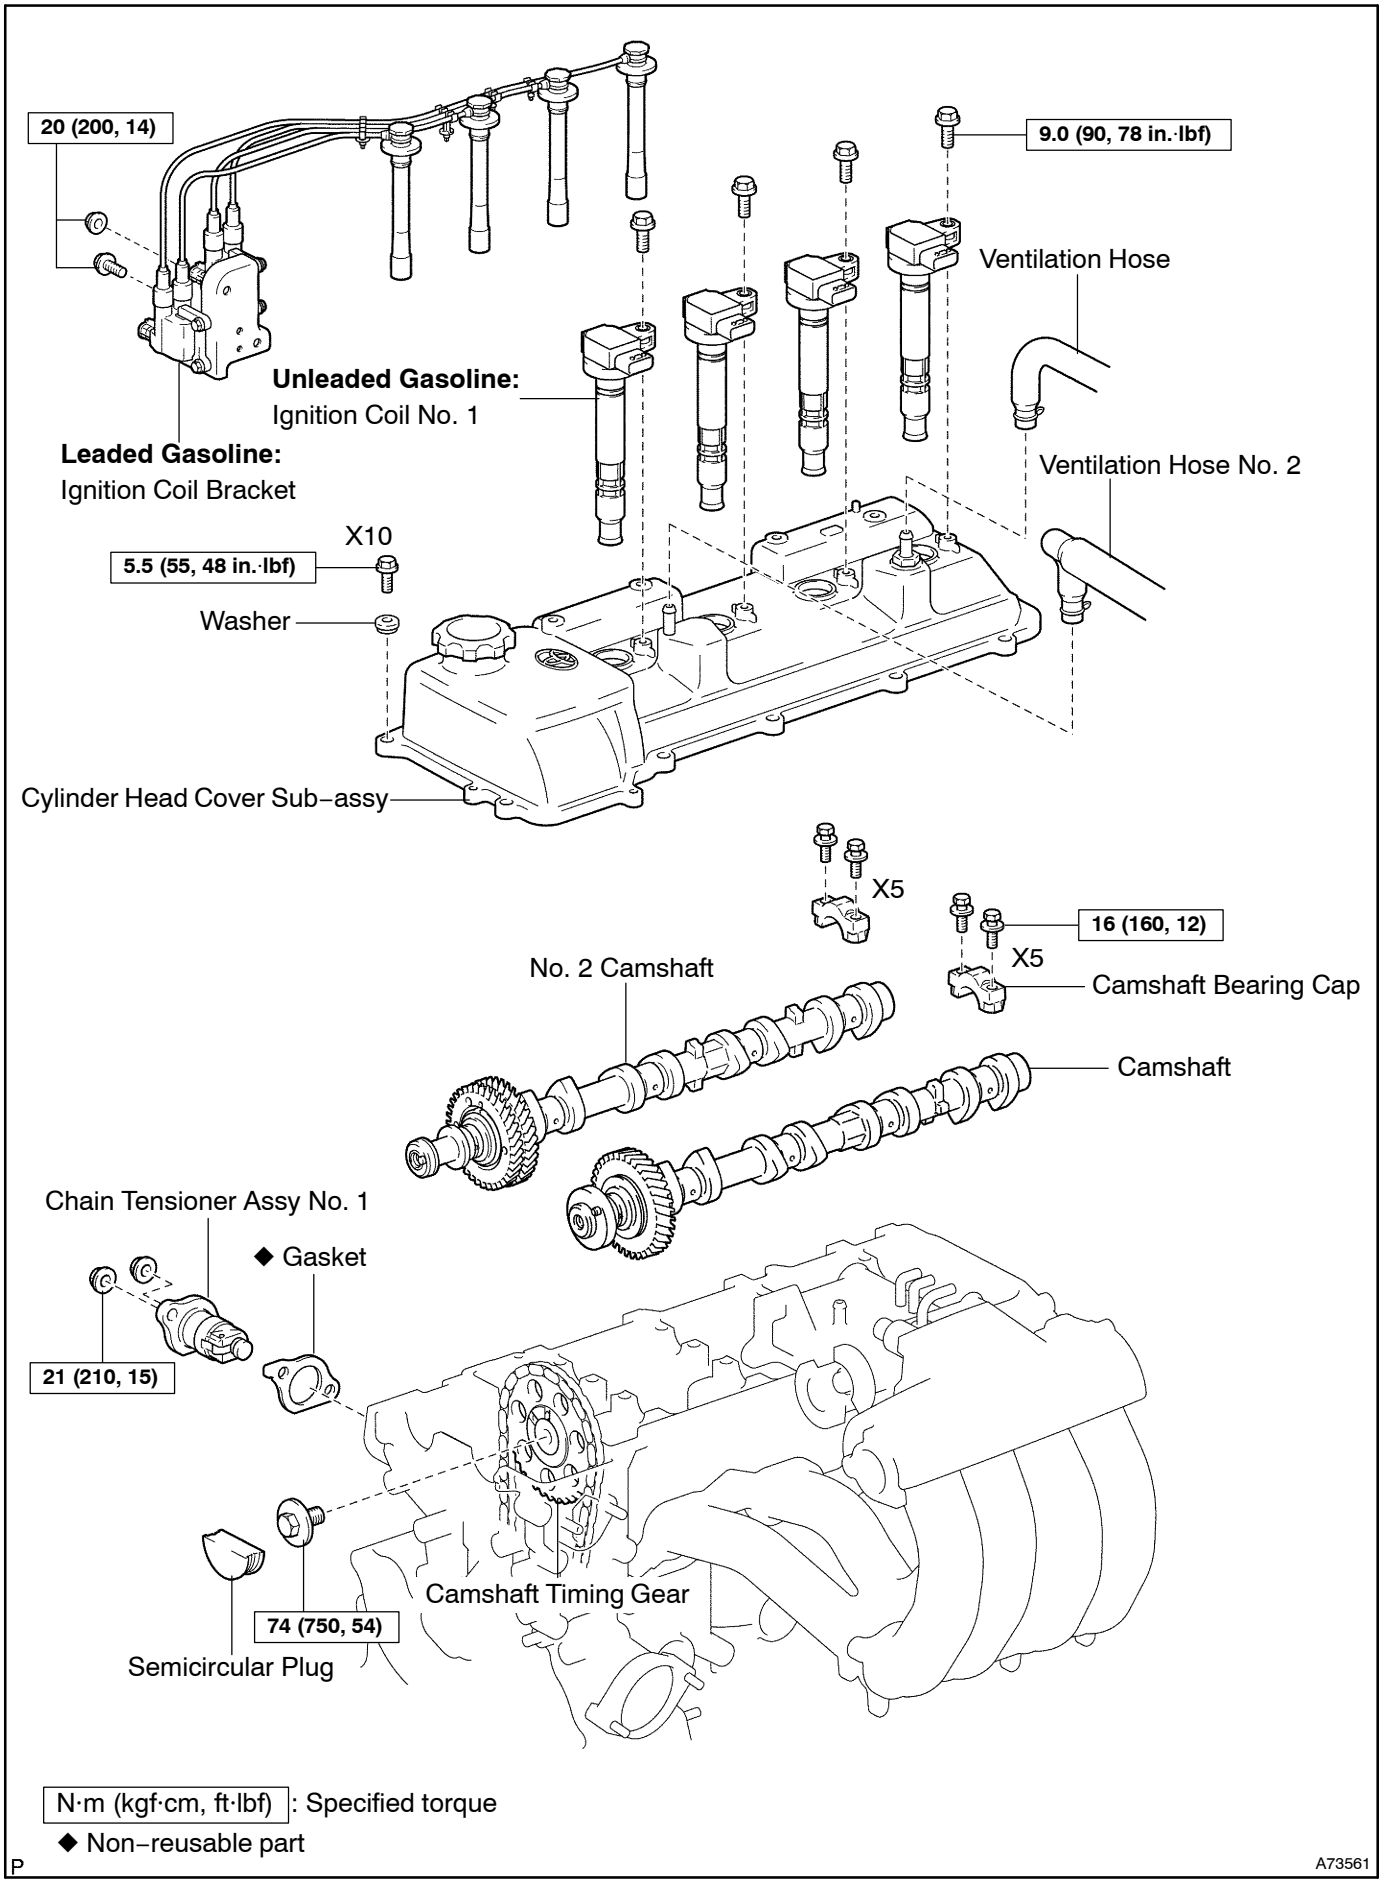



N·m (kgf·cm, ft·lbf) : Specified torque


◆ Non–reusable part

P

A73561

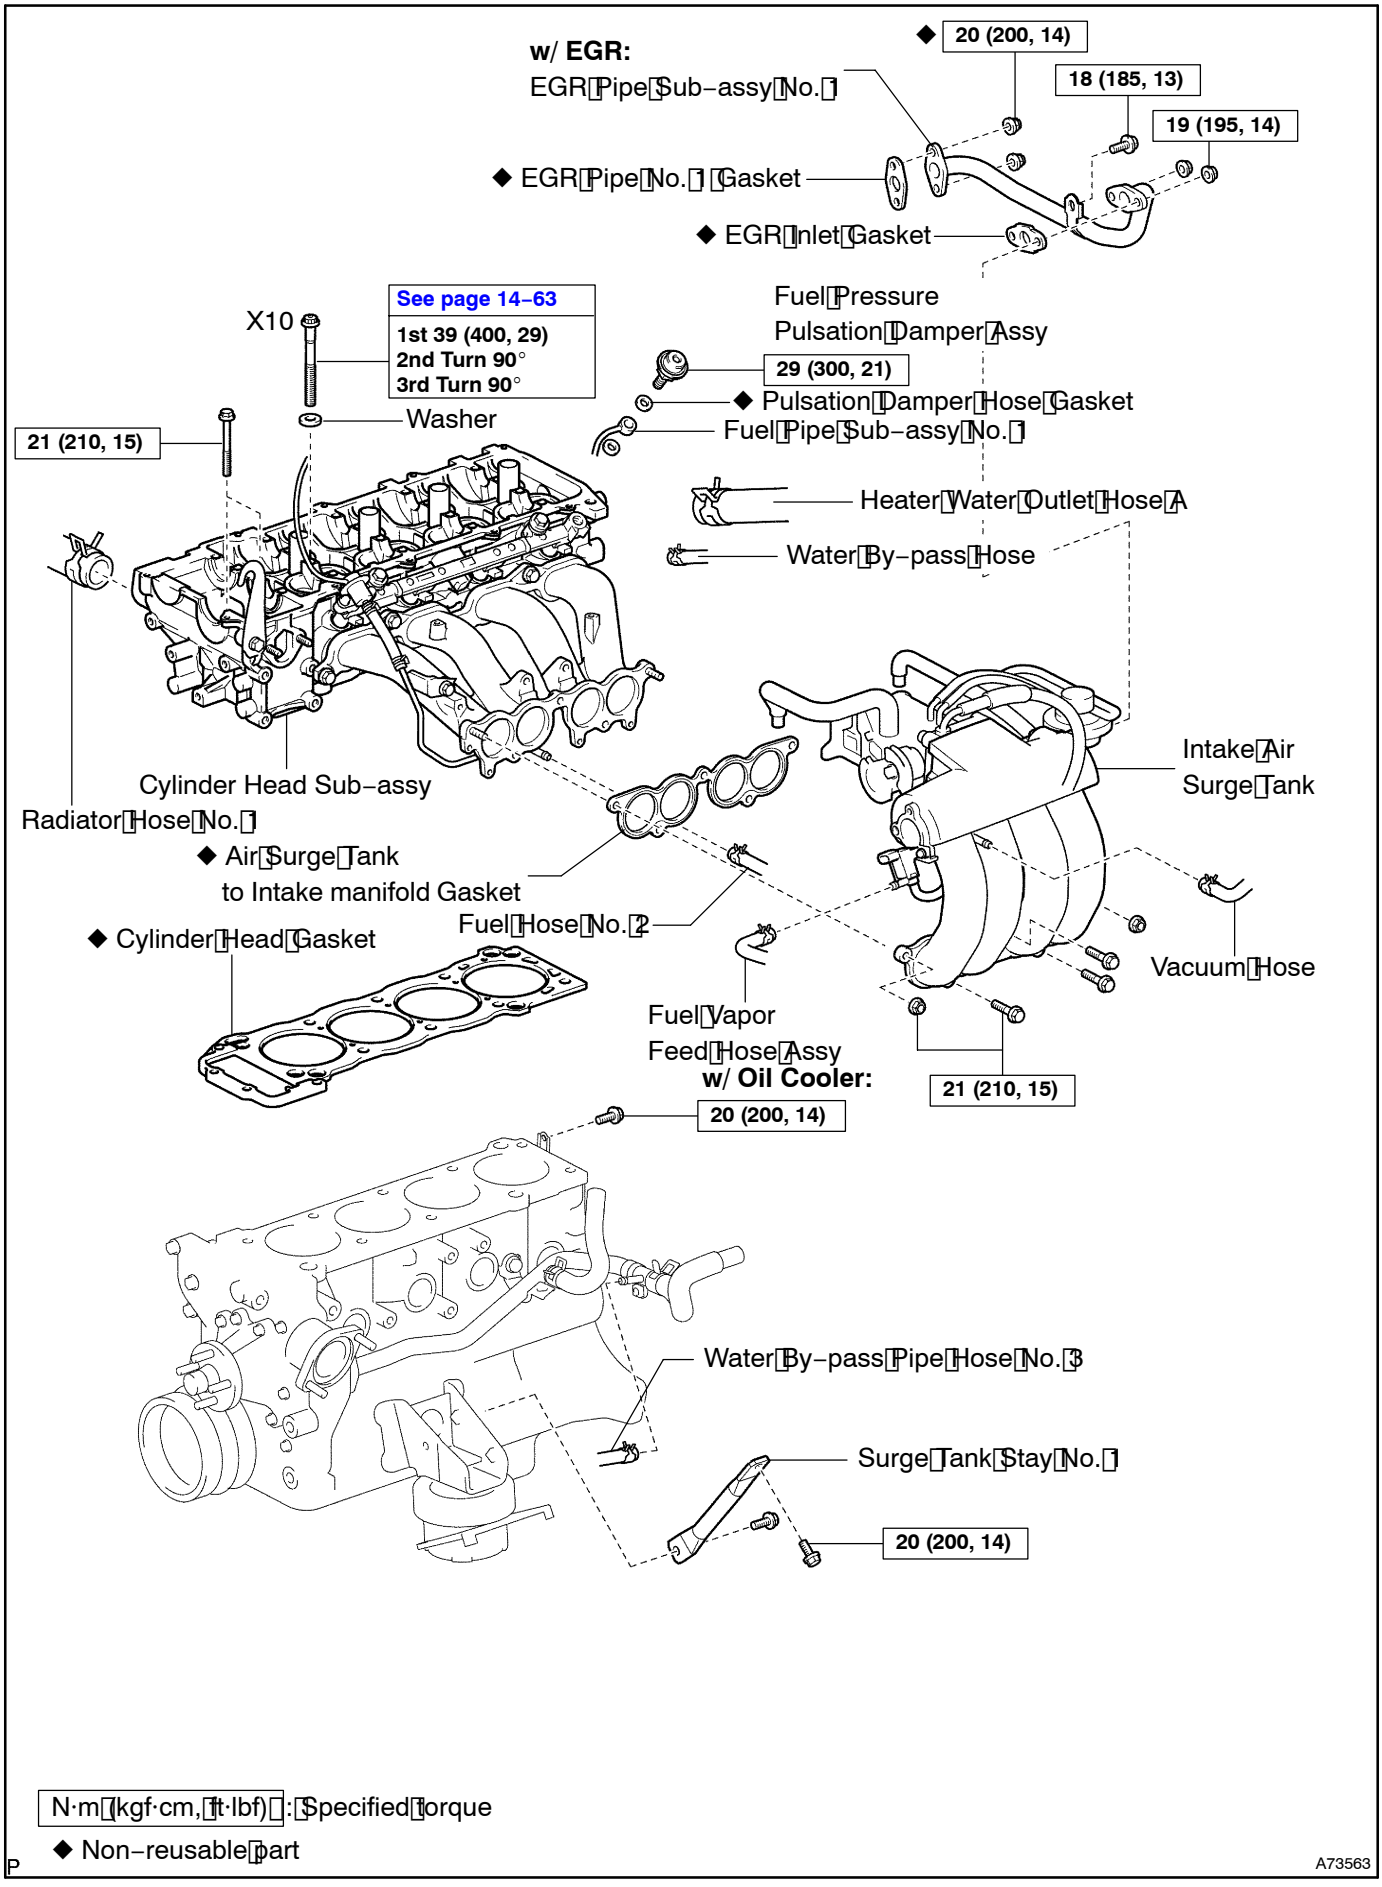
w/ EGR:
EGR Pipe Sub–assy No. 1
◆ 20 (200, 14)
18 (185, 13)
19 (195, 14)
◆ EGR Pipe No. 1 Gasket
◆ EGR Inlet Gasket
See page 14–63
X10
1st 39 (400, 29)
2nd Turn 90°
3rd Turn 90°
Fuel Pressure
Pulsation Damper Assy
29 (300, 21)
◆ Pulsation Damper Hose Gasket
Fuel Pipe Sub–assy No. 1
Washer
21 (210, 15)
Heater Water Outlet Hose A
Water By–pass Hose
Intake Air
Surge Tank
Cylinder Head Sub–assy
Radiator Hose No. 1
◆ Air Surge Tank
to Intake manifold Gasket
Fuel Hose No. 2
◆ Cylinder Head Gasket
Vacuum Hose
Fuel Vapor
Feed Hose Assy
w/ Oil Cooler:
21 (210, 15)
20 (200, 14)
Water By–pass Pipe Hose No. 3
Surge Tank Stay No. 1
20 (200, 14)
N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part
A73563

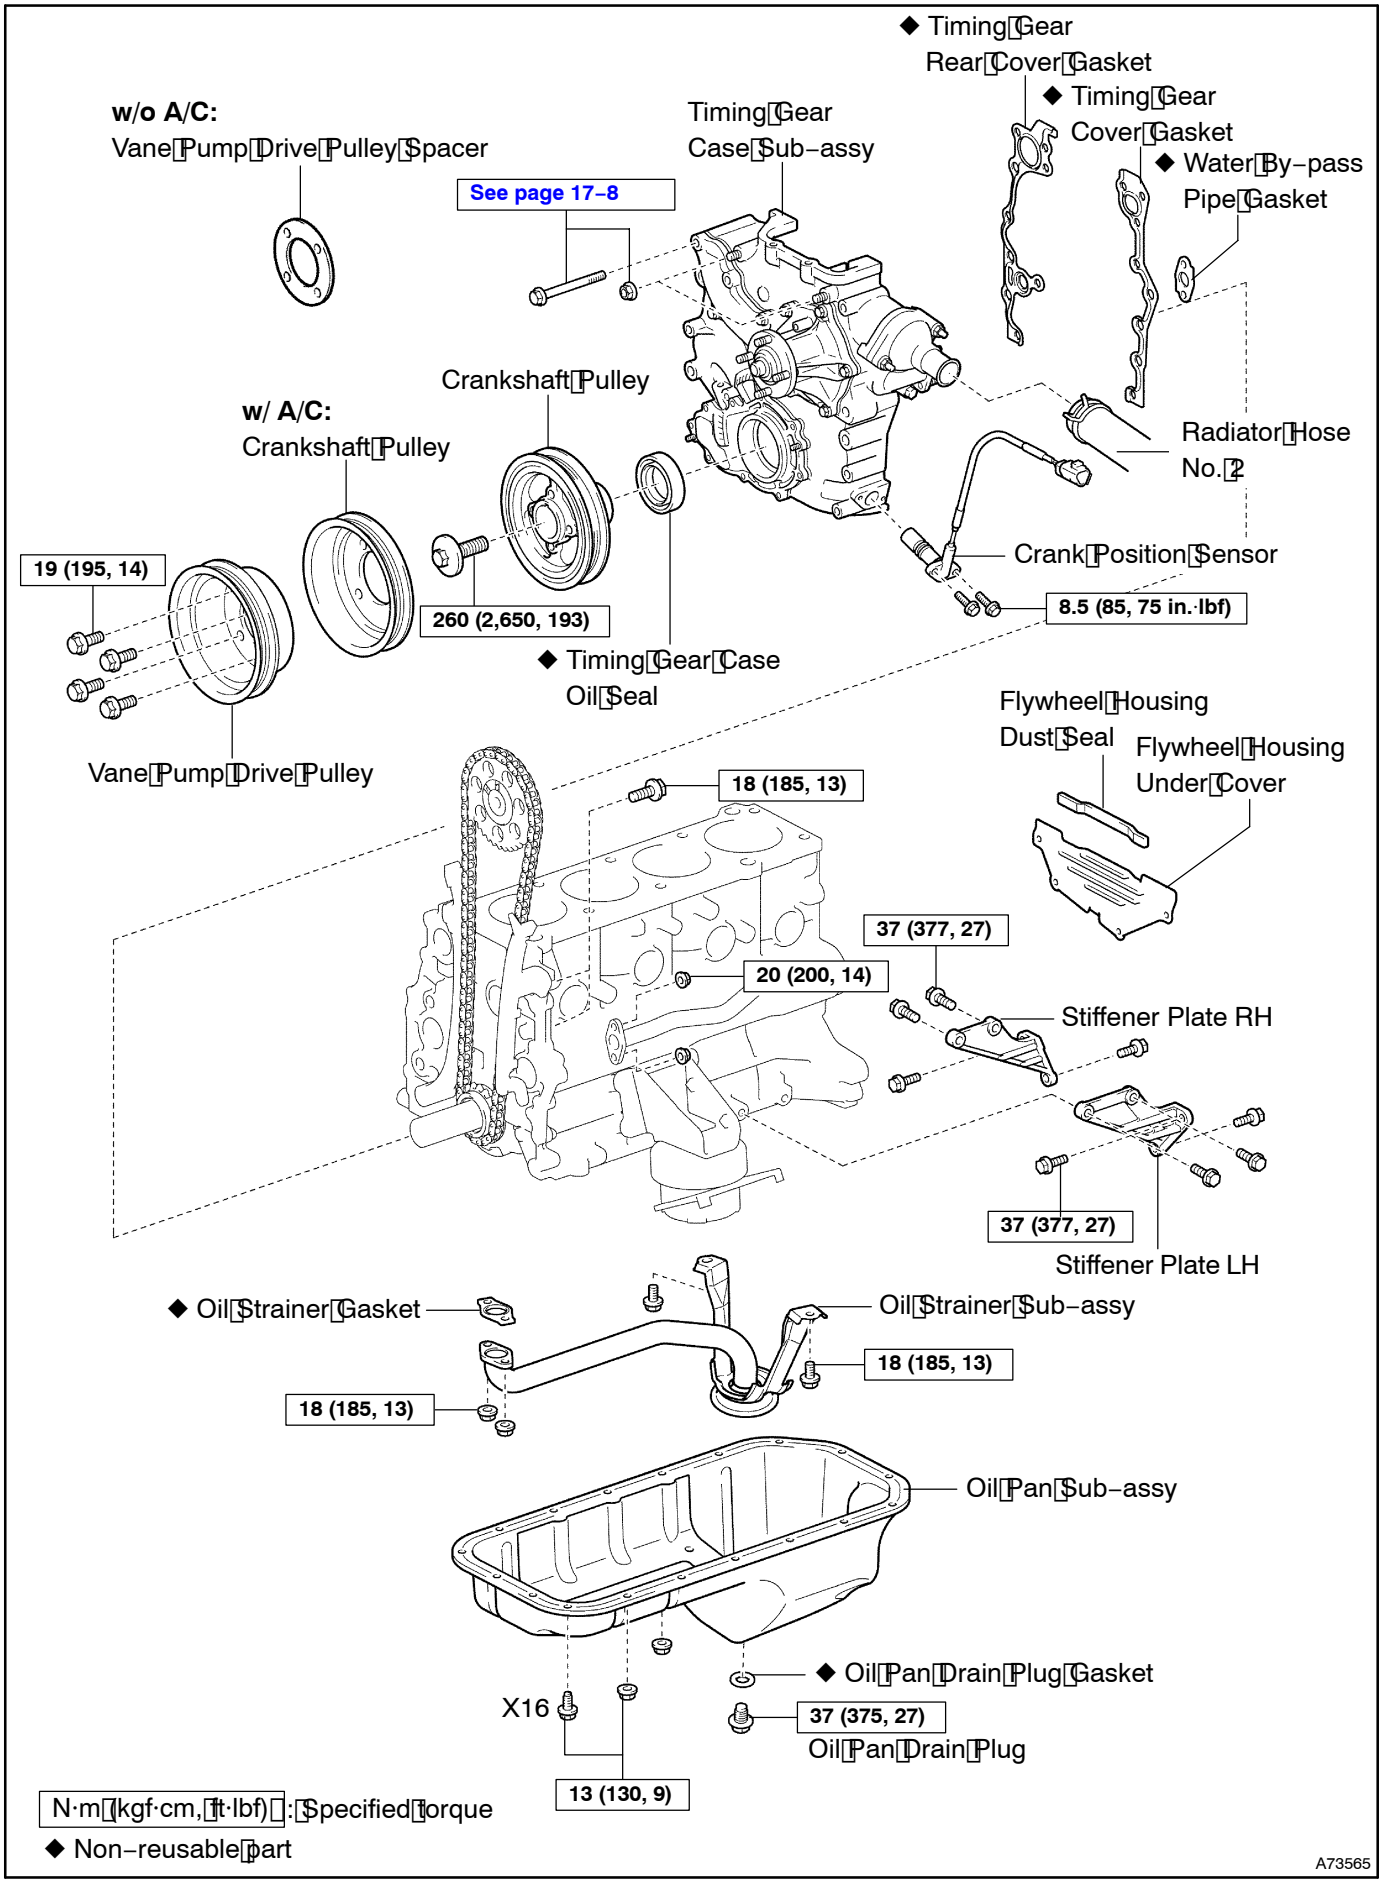
◆ Timing Gear Rear Cover Gasket
◆ Timing Gear Cover Gasket
◆ Water By–pass Pipe Gasket
w/o A/C:
Vane Pump Drive Pulley Spacer
Timing Gear Case Sub–assy
See page 17–8
Crankshaft Pulley
w/ A/C:
Crankshaft Pulley
Radiator Hose No. 2
Crank Position Sensor
19 (195, 14)
260 (2,650, 193)
8.5 (85, 75 in.·lbf)
◆ Timing Gear Case Oil Seal
Flywheel Housing Dust Seal
Flywheel Housing Under Cover
Vane Pump Drive Pulley
18 (185, 13)
37 (377, 27)
20 (200, 14)
Stiffener Plate RH
37 (377, 27)
Stiffener Plate LH
◆ Oil Strainer Gasket
Oil Strainer Sub–assy
18 (185, 13)
18 (185, 13)
Oil Pan Sub–assy
◆ Oil Pan Drain Plug Gasket
X16
37 (375, 27)
Oil Pan Drain Plug
13 (130, 9)
N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part
A73565

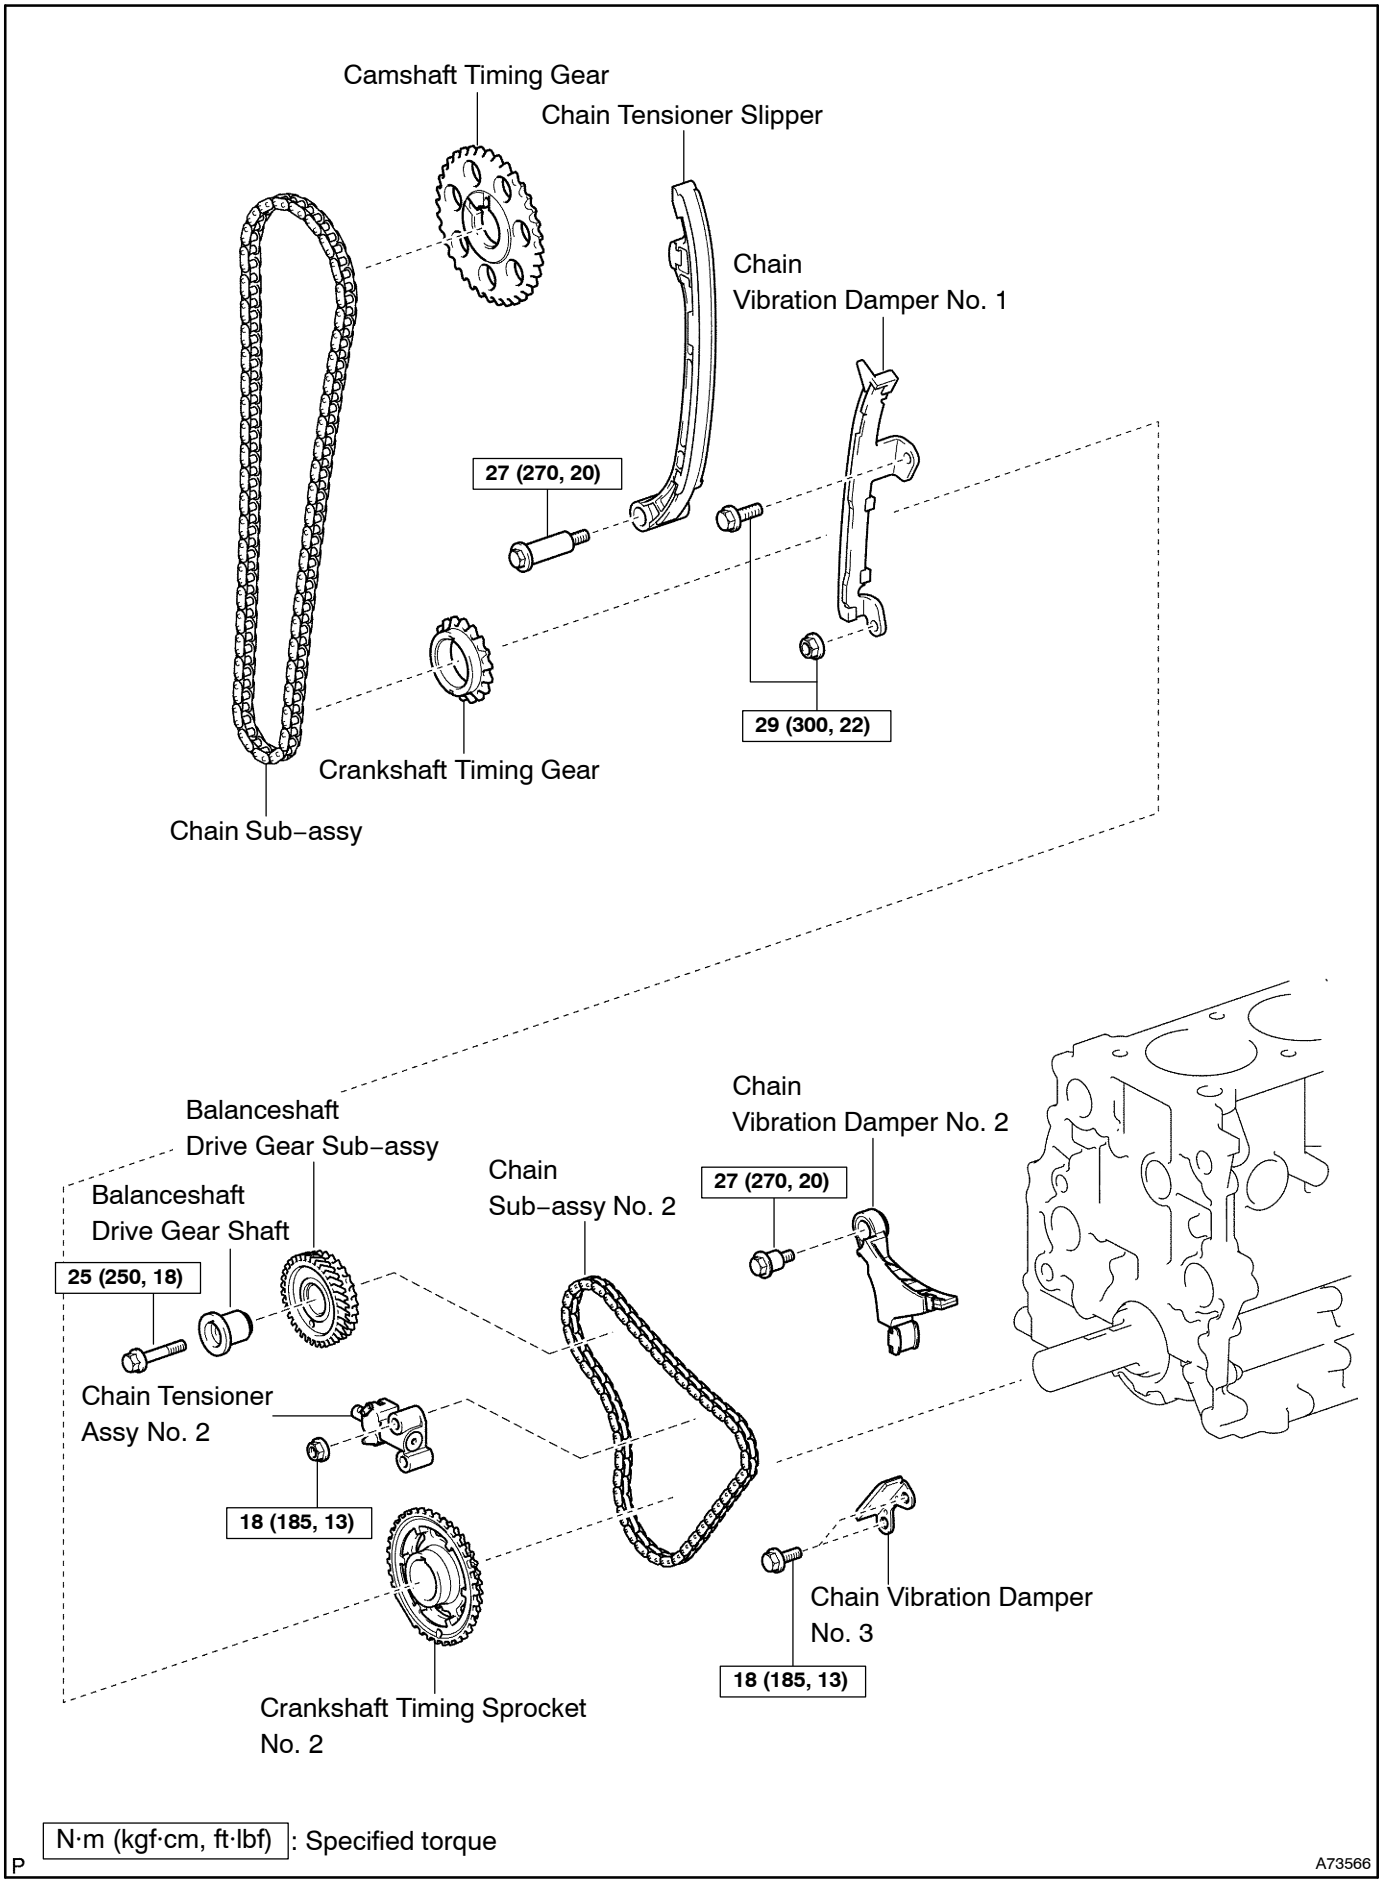
Camshaft Timing Gear
Chain Tensioner Slipper
Chain
Vibration Damper No. 1
27 (270, 20)
29 (300, 22)
Crankshaft Timing Gear
Chain Sub–assy
Balanceshaft
Drive Gear Sub–assy
Balanceshaft
Drive Gear Shaft
25 (250, 18)
Chain Tensioner
Assy No. 2
18 (185, 13)
Chain
Sub–assy No. 2
Chain
Vibration Damper No. 2
27 (270, 20)
Chain Vibration Damper
No. 3
18 (185, 13)
Crankshaft Timing Sprocket
No. 2
N·m (kgf·cm, ft·lbf): Specified torque
P
A73566