


DIFFERENTIAL CARRIER ASSY REAR

COMPONENTS


2906C–01

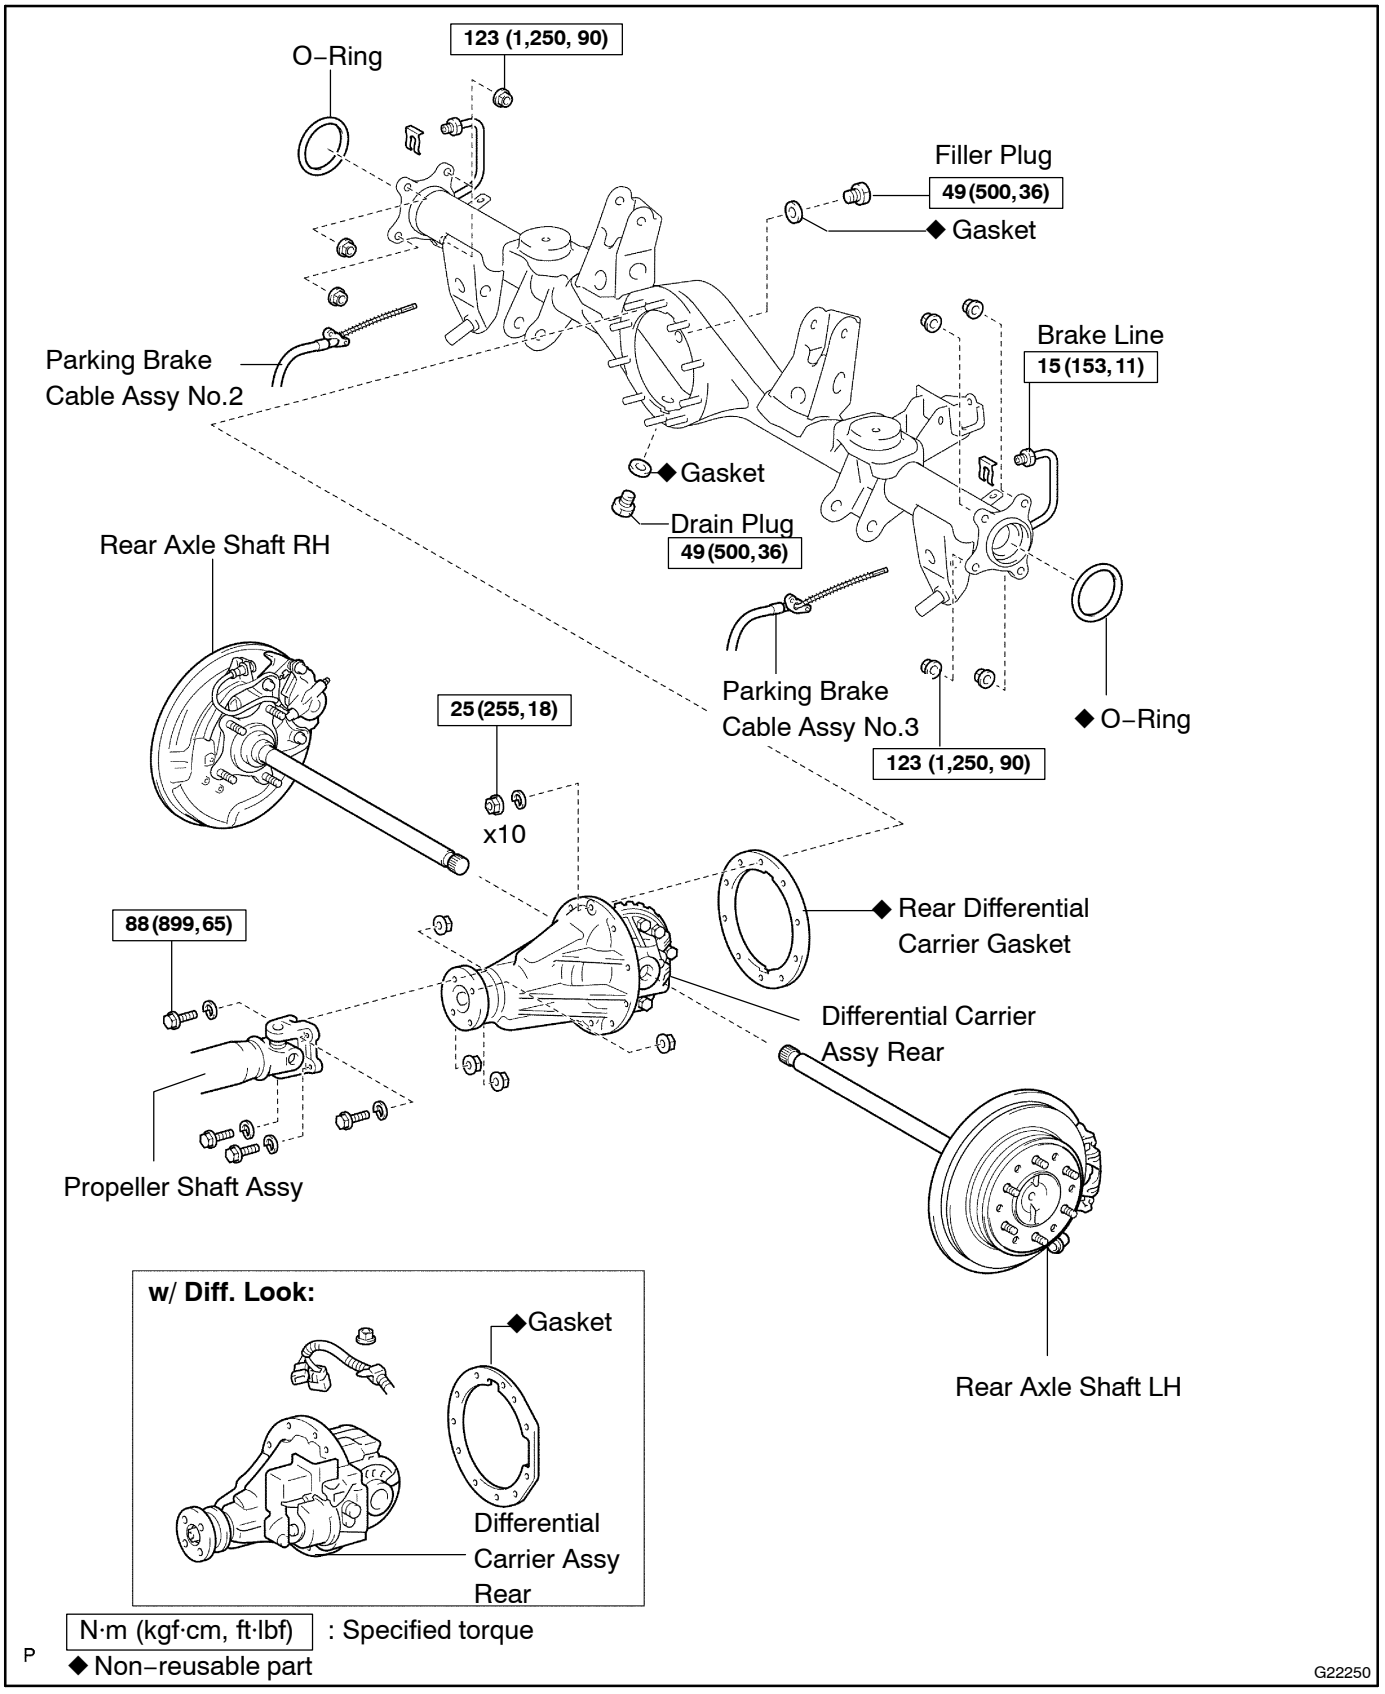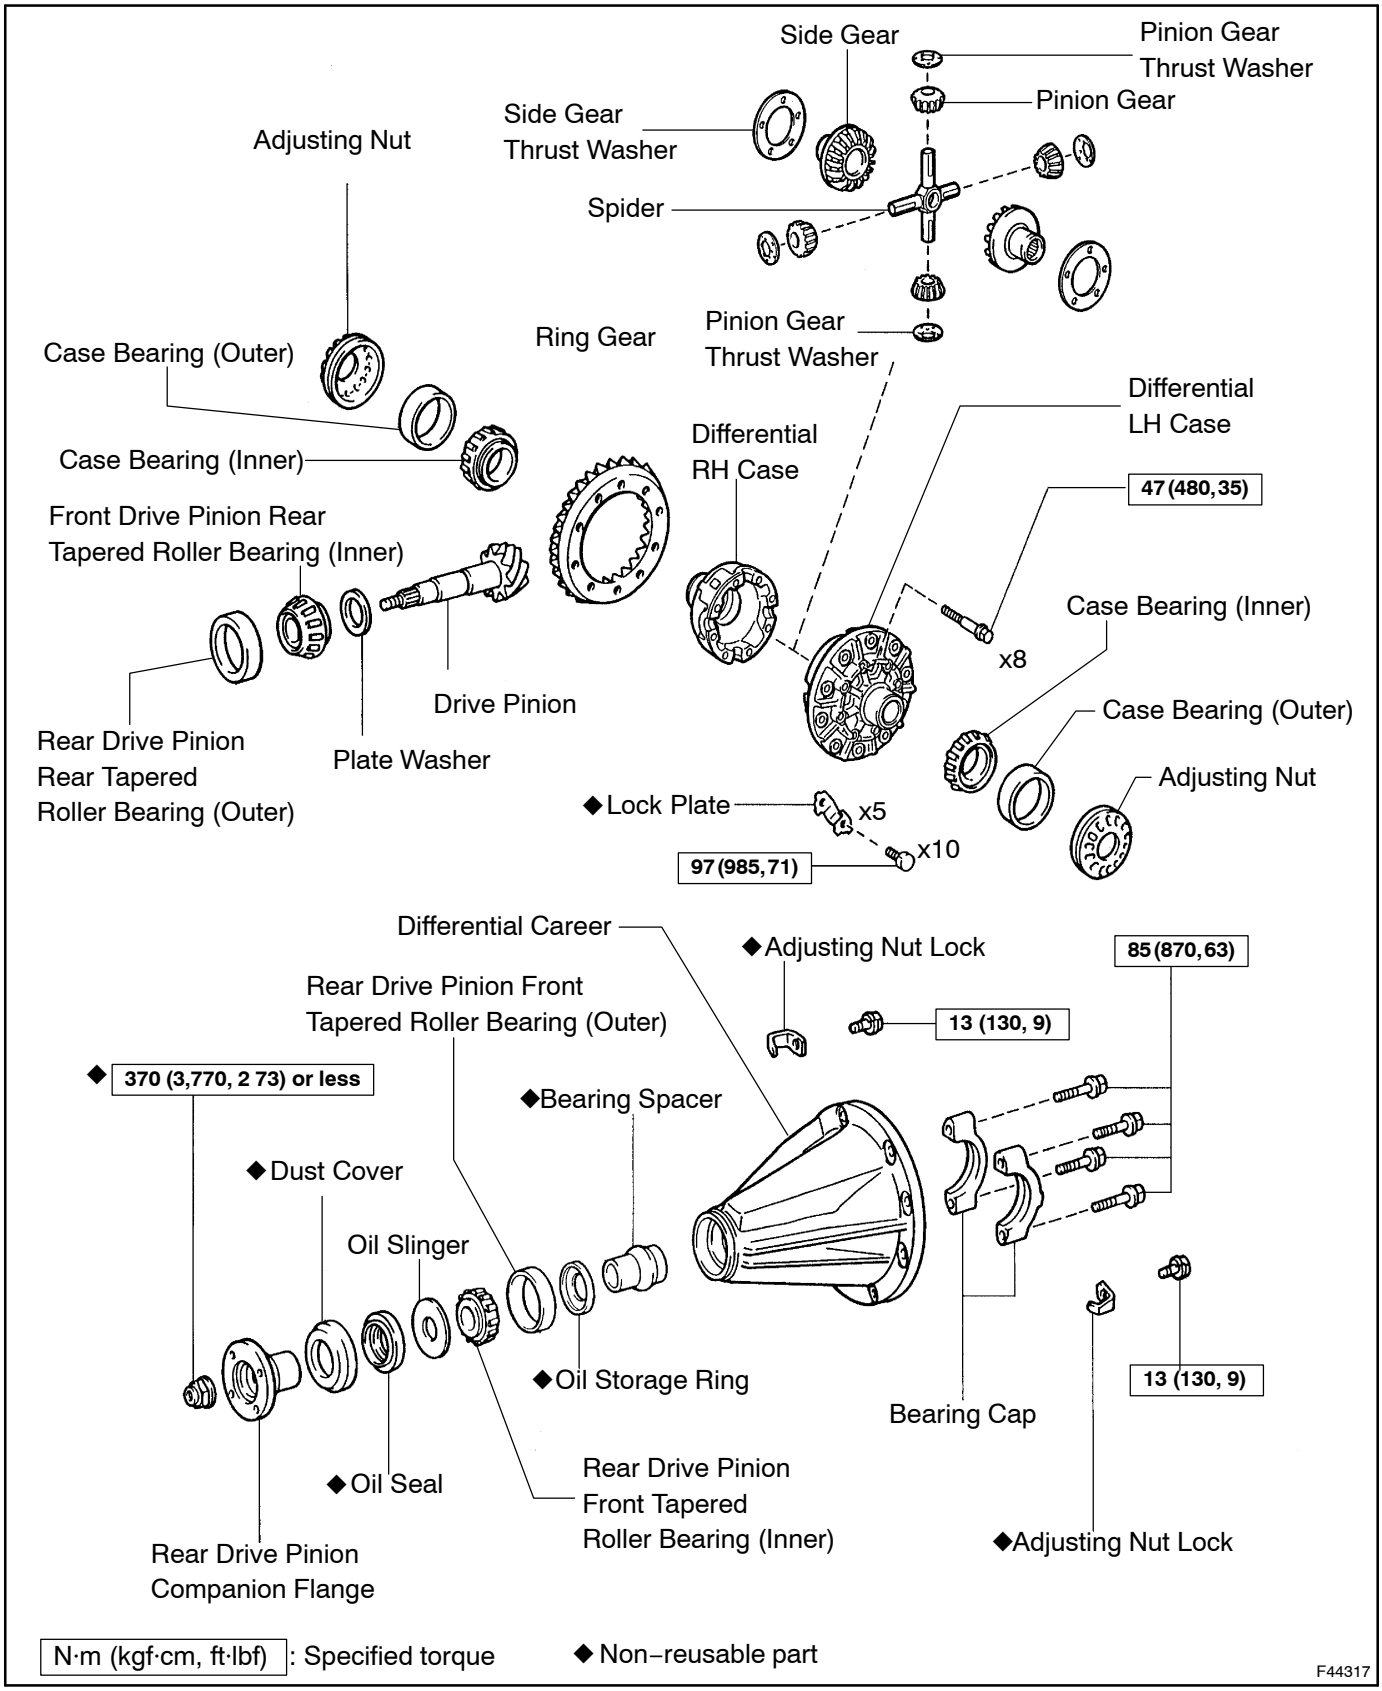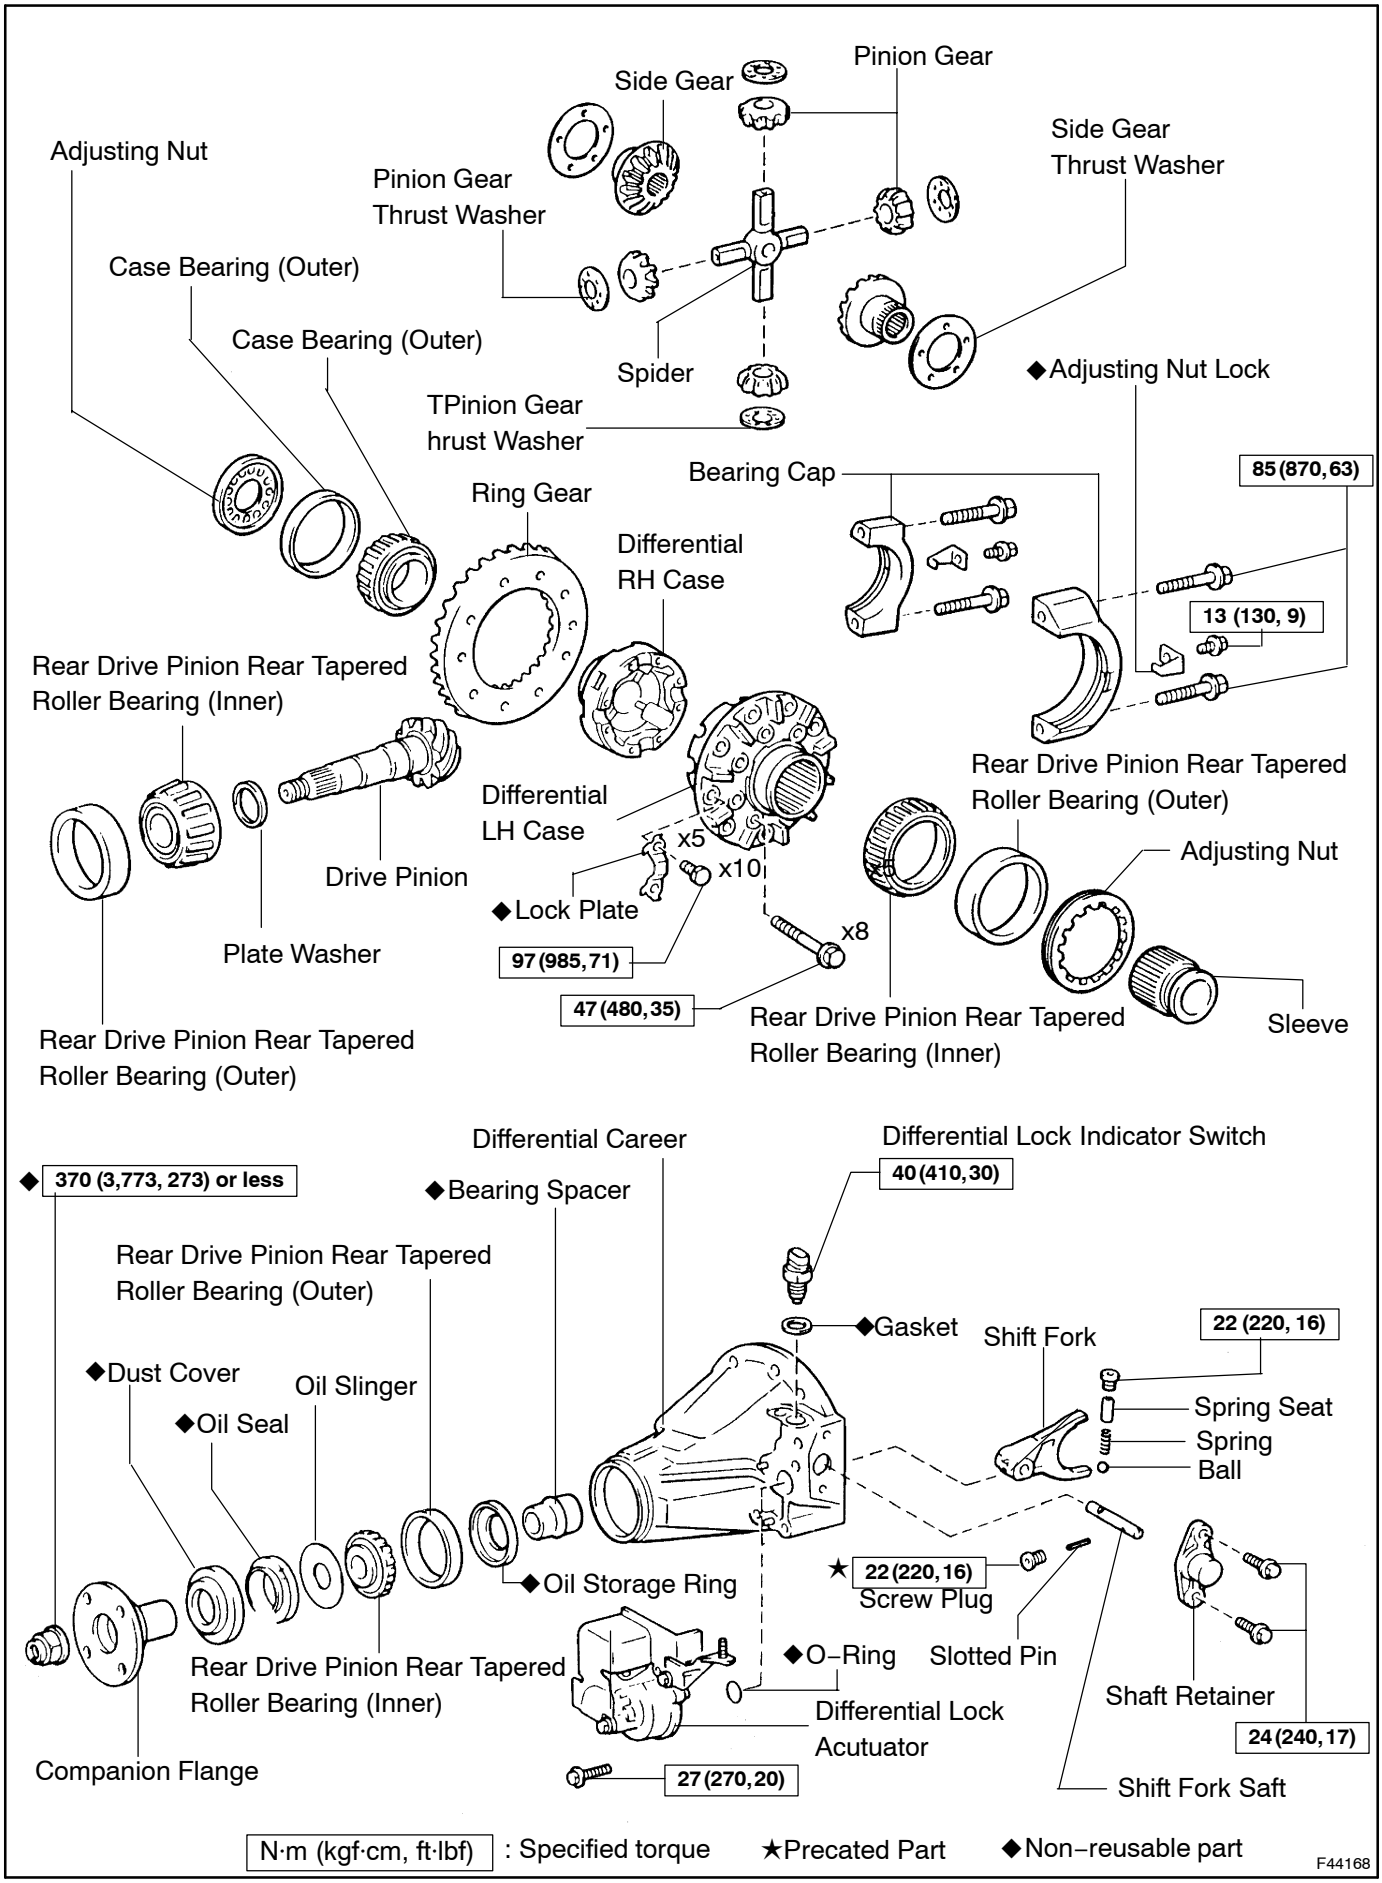


Side Gear
Pinion Gear Thrust Washer
Pinion Gear
Side Gear Thrust Washer
Adjusting Nut
Spider
Ring Gear
Pinion Gear Thrust Washer
Case Bearing (Outer)
Differential LH Case
Case Bearing (Inner)
Differential RH Case
47 (480, 35)
Front Drive Pinion Rear Tapered Roller Bearing (Inner)
x8
Case Bearing (Inner)
Drive Pinion
Case Bearing (Outer)
Rear Drive Pinion Rear Tapered Roller Bearing (Outer)
Plate Washer
Adjusting Nut
◆Lock Plate
x5
x10
97 (985, 71)
Differential Career
◆Adjusting Nut Lock
85 (870, 63)
Rear Drive Pinion Front Tapered Roller Bearing (Outer)
13 (130, 9)
◆ 370 (3,770, 2 73) or less
◆Bearing Spacer
◆Dust Cover
Oil Slinger
◆Oil Storage Ring
Bearing Cap
13 (130, 9)
◆Oil Seal
Rear Drive Pinion Front Tapered Roller Bearing (Inner)
◆Adjusting Nut Lock
Rear Drive Pinion Companion Flange
N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part
F44317


Pinion Gear
Side Gear
Adjusting Nut
Side Gear Thrust Washer
Pinion Gear Thrust Washer
Case Bearing (Outer)
Case Bearing (Outer)
Spider
◆Adjusting Nut Lock
TPinion Gear hrust Washer
Bearing Cap
85 (870, 63)
Ring Gear
Differential RH Case
13 (130, 9)
Rear Drive Pinion Rear Tapered Roller Bearing (Inner)
Rear Drive Pinion Rear Tapered Roller Bearing (Outer)
Differential LH Case
x5
x10
Adjusting Nut
Drive Pinion
◆Lock Plate
x8
Plate Washer
97 (985, 71)
47 (480, 35)
Sleeve
Rear Drive Pinion Rear Tapered Roller Bearing (Inner)
Rear Drive Pinion Rear Tapered Roller Bearing (Outer)
Differential Career
Differential Lock Indicator Switch
◆ 370 (3,773, 273) or less
◆Bearing Spacer
40 (410, 30)
Rear Drive Pinion Rear Tapered Roller Bearing (Outer)
◆Gasket
Shift Fork
22 (220, 16)
◆Dust Cover
Oil Slinger
Spring Seat
◆Oil Seal
Spring
Ball
◆Oil Storage Ring
★ 22 (220, 16)
Screw Plug
Rear Drive Pinion Rear Tapered Roller Bearing (Inner)
◆O–Ring
Slotted Pin
Shaft Retainer
Differential Lock Acutuator
24 (240, 17)
Companion Flange
27 (270, 20)
Shift Fork Saft
N·m (kgf·cm, ft·lbf) : Specified torque
★Precated Part
◆Non–reusable part
F44168

LSD:

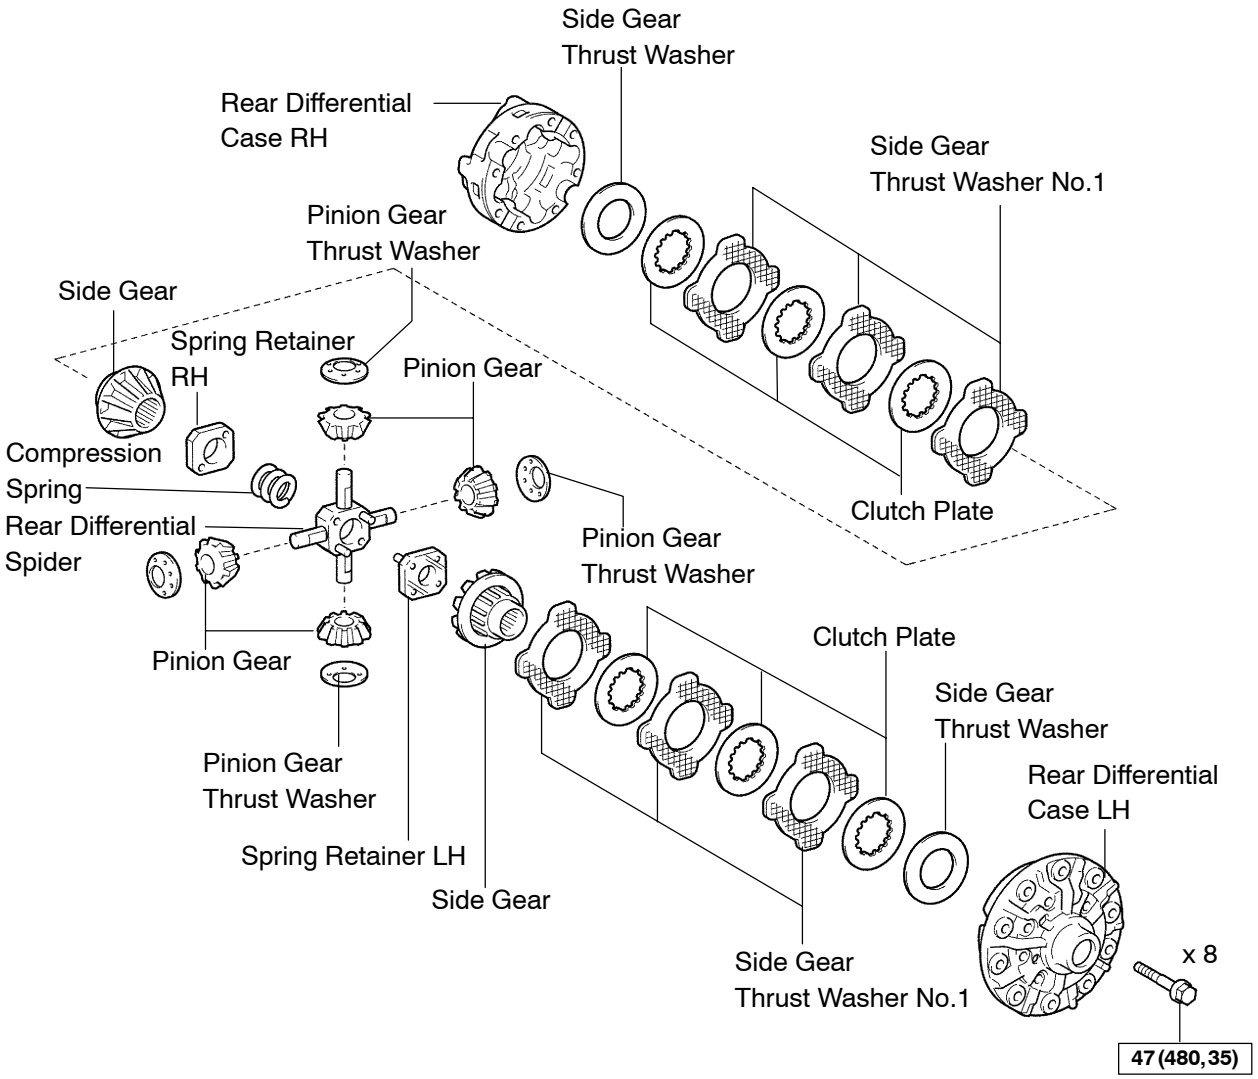

N·m (kgf·cm, ft·lbf) : Specified torque

P

C88910