

CAUTION LABEL ATTACHMENT POSITION


1 After using a degreasing agent to clean the surfaces of the body where the caution labels will be attached, attach the caution labels to the positions shown in the illustration.
HINT:
- *Attach each caution label with its orientation the same as the numbers shown in the illustration.*
- *Make sure the caution label is not attached over a spot weld.*
- *When attaching the caution label, make sure not to touch the label's adhesive surface.*
- *To prevent the edges of the caution label from peeling, apply extra pressure to the label's periphery.*
- *If the work area's temperature is 5°C or less, the caution label's adhesive will deteriorate. It is recommended that you heat the label to 20 to 40°C.*

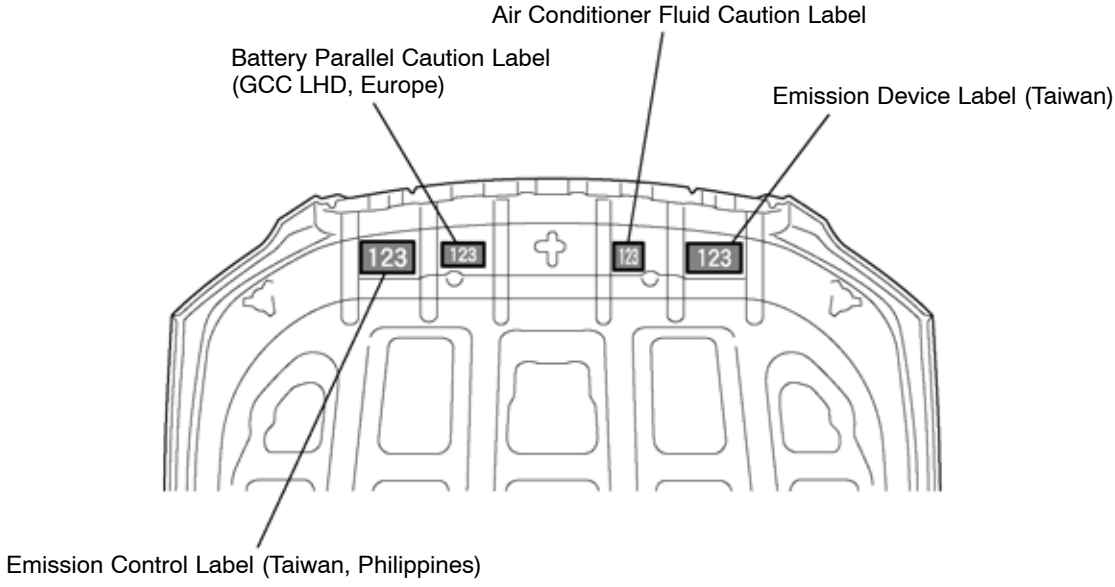


[3 Door]




[5 Door]




F43375

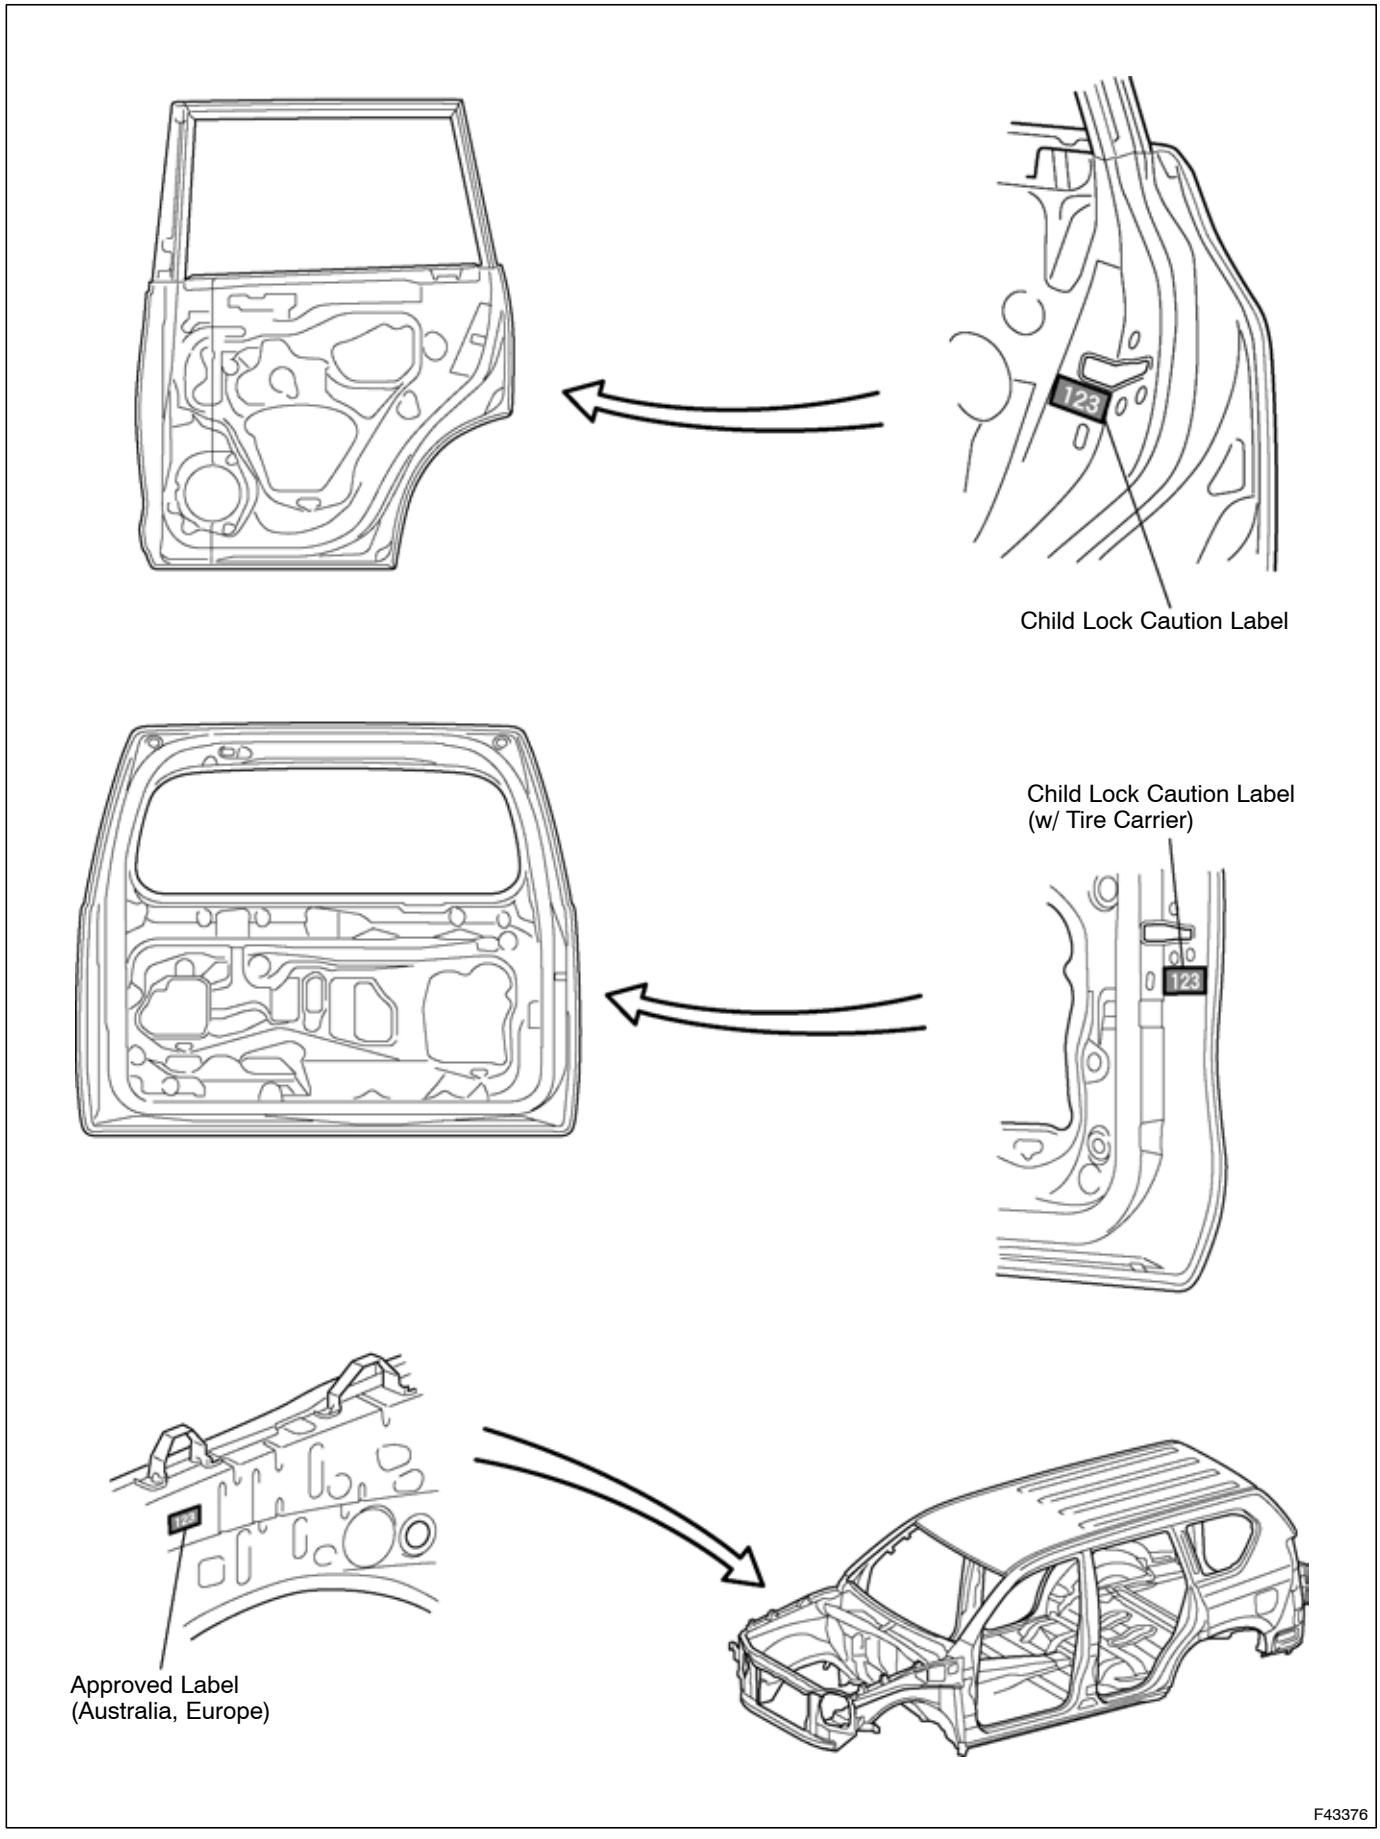
123
Child Lock Caution Label
Child Lock Caution Label
(w/ Tire Carrier)
123
123
Approved Label
(Australia, Europe)
F43376

[LHD]

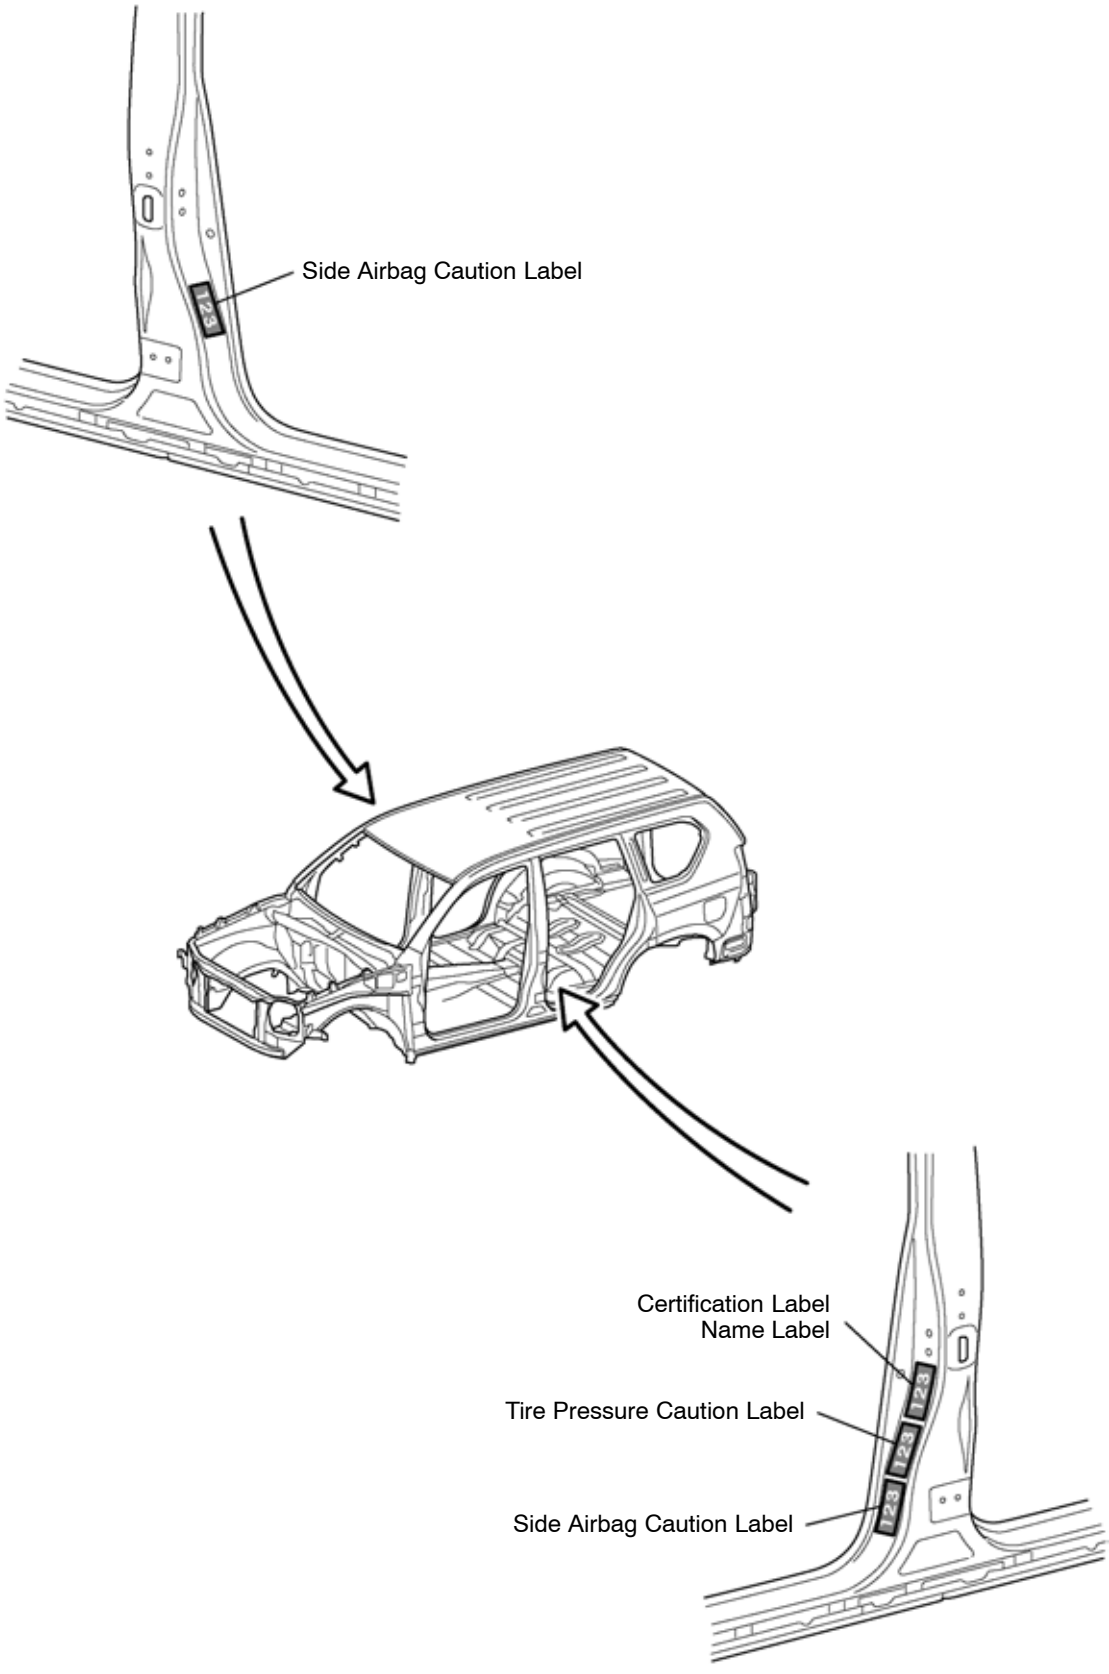
Side Airbag Caution Label
Certification Label
Name Label
Tire Pressure Caution Label
Side Airbag Caution Label
F43377

[RHD]

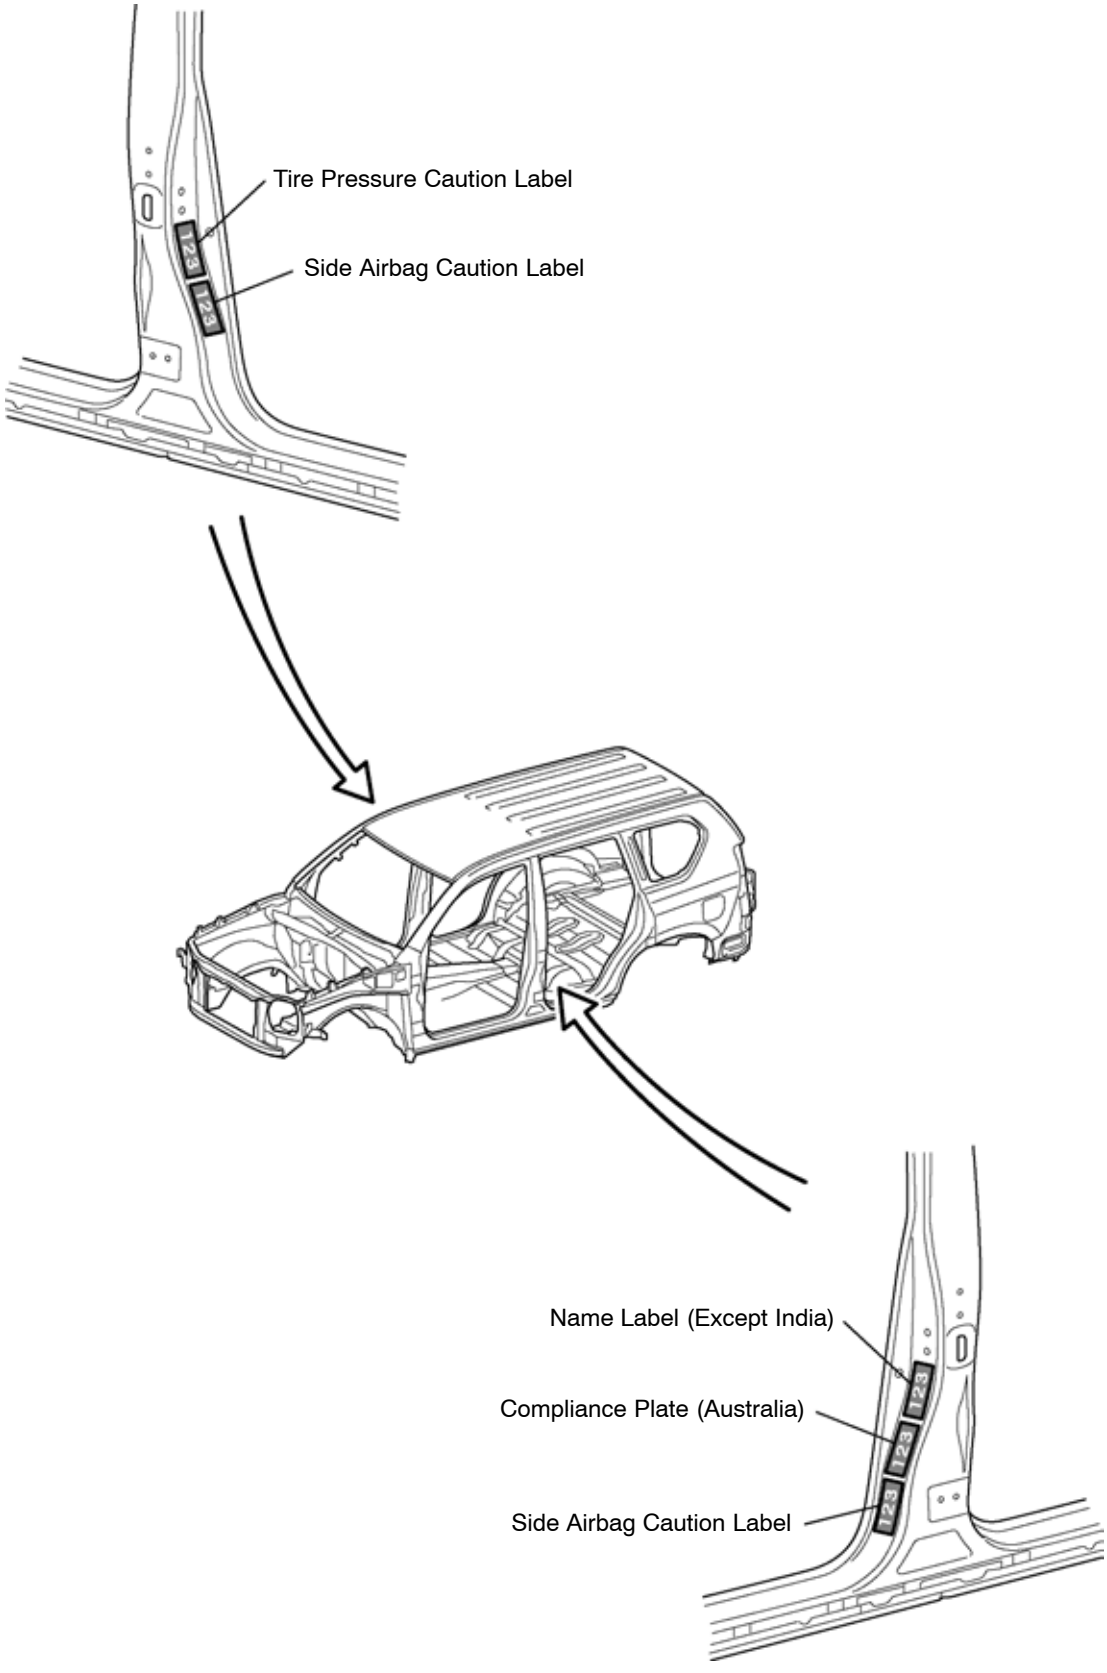
Tire Pressure Caution Label
Side Airbag Caution Label
Name Label (Except India)
Compliance Plate (Australia)
Side Airbag Caution Label
F43378