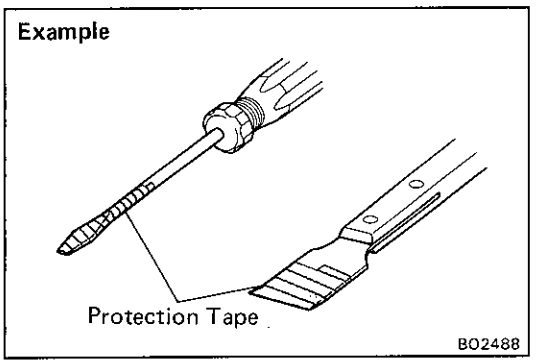
GENERAL INFORMATION

HANDLING PRECAUTIONS

If there is a possibility that the body and/ or parts may be damaged, first remove the danger before performing repair operations.

Example:

1. Apply protection tape to the body adjacent to the body parts when removing and installing.



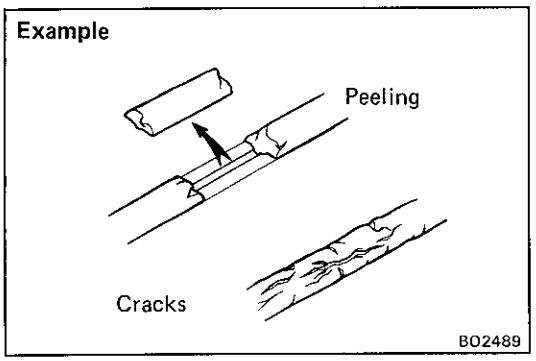
2. When prying off the body parts with a screwdriver or scraper etc., be sure to apply protection tape to the tip or blade to prevent damage to the paint film or body parts.

ANTI-RUST TREATMENT

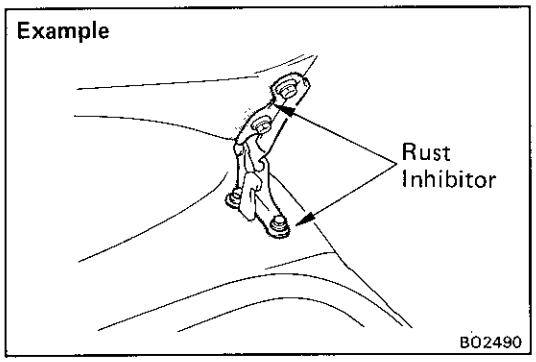
If anti-rust agents are damaged while repairing other parts, be sure to repair the anti-rust agent.

Example:

1. If body sealant, paint film or undercoat are damaged by peeling, cracks, etc., be sure to repair each with an anti-rust agent.



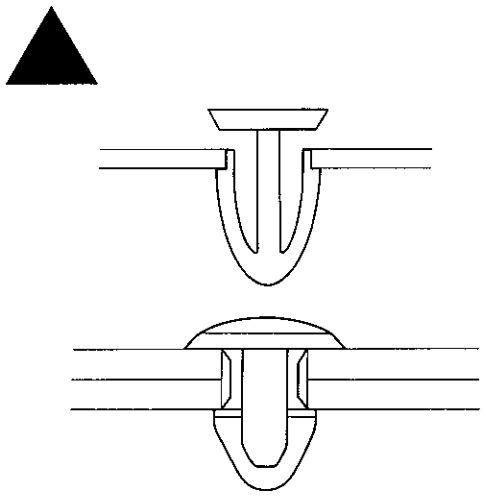
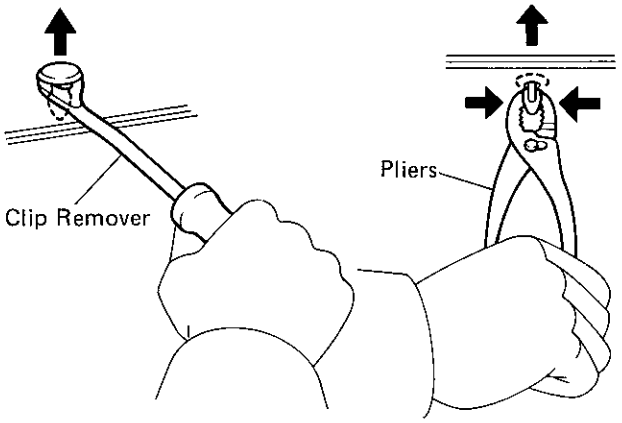
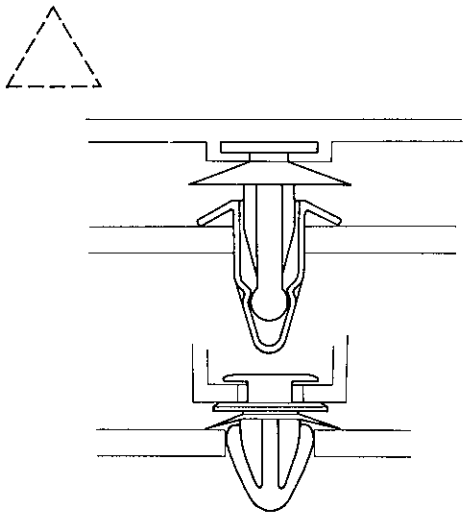
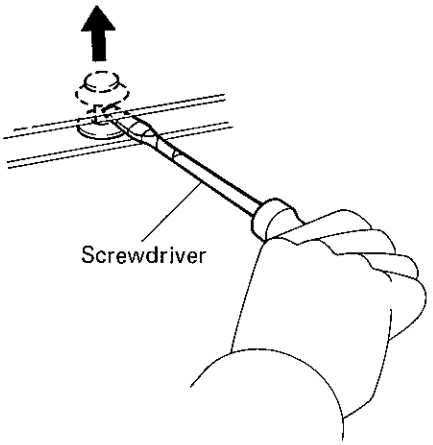
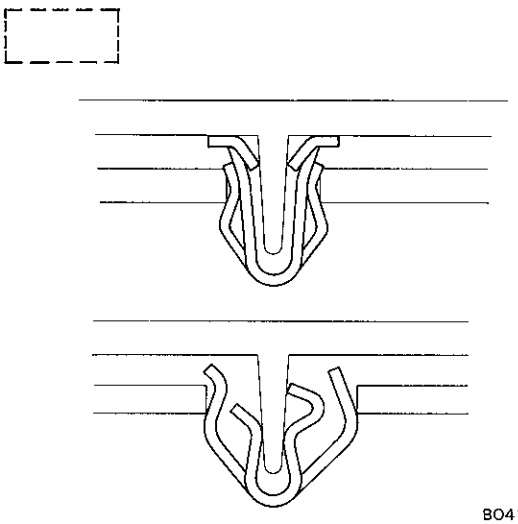
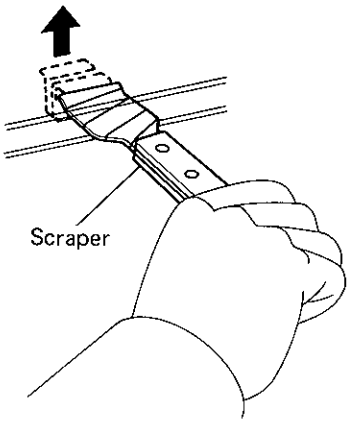
2. If a hinge or exterior body panel is loosened or removed, be sure apply rust inhibitor after repairs.



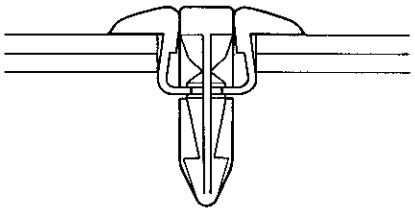
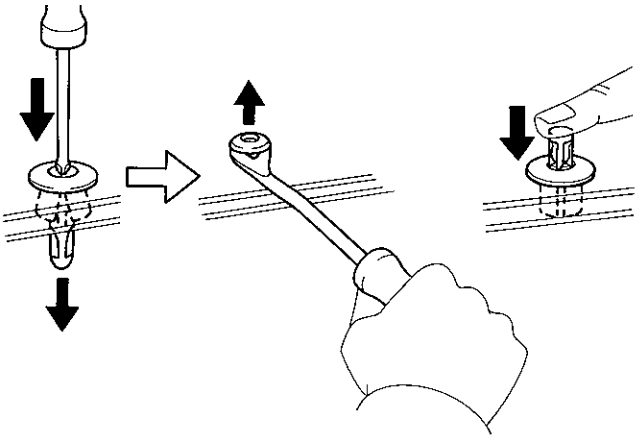
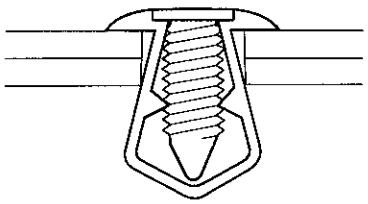
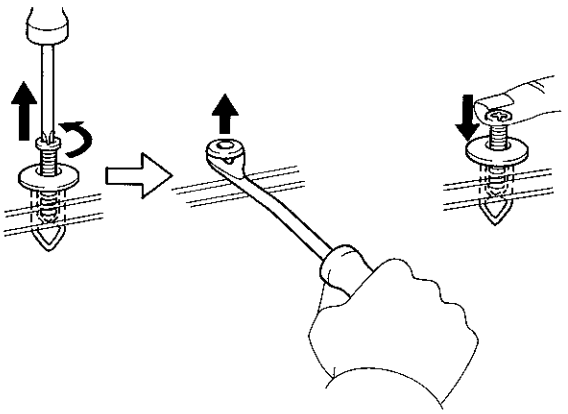
CLIPS

The removal and installation methods of typical clips used in body parts are shown in the table below.

HINT: If the clip is damaged during the operation, always replace it with a new clip.

Shape (Example)	Removal/Installation
 BO4116	 BO4117
 BO4118	 BO4119
 BO4120	 BO4121

CLIPS (Cont'd)

Shape (Example)	Removal/Installation
 BO4122	Removal Installation  BO4123
 BO4124	Removal Installation  BO4125