ROCKER OUTER PANEL (CUT): Short Body




F24690A

Symbol meaning

REMOVAL	: Remove Weld Points	: Cut and Join Location
		: Cut Location for Supply Parts
INSTALLATION	: MIG Plug Weld	: Butt Weld

F24690B

REMOVAL·INSTALLATION

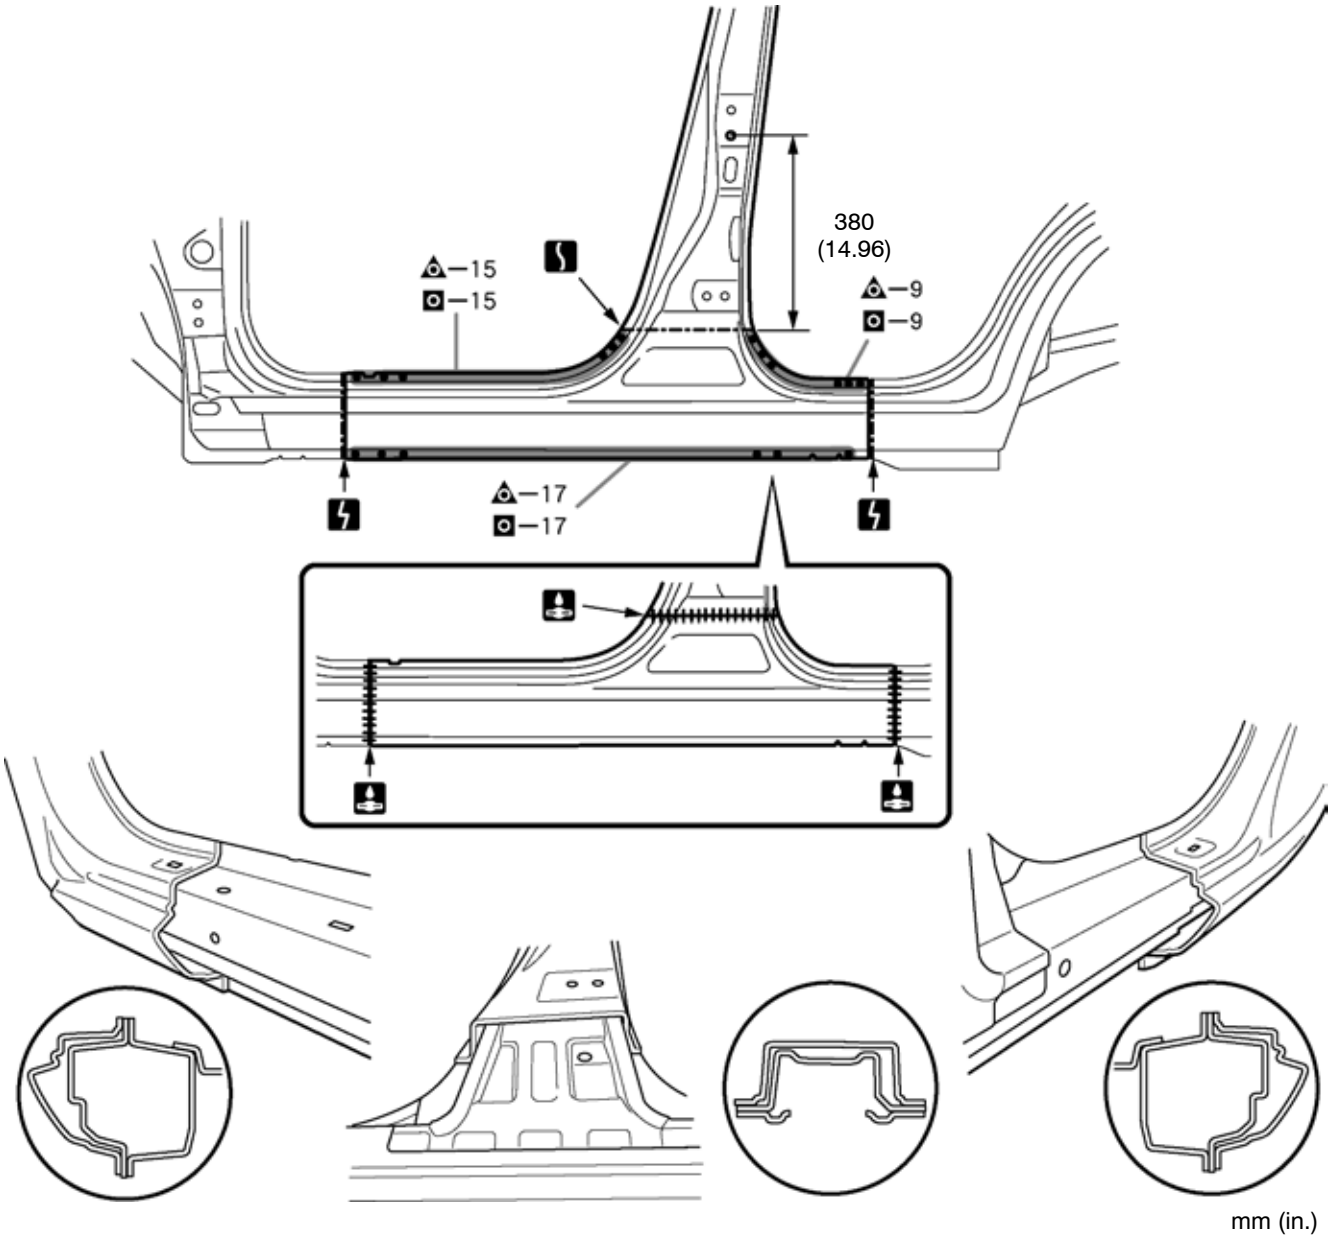

mm (in.)

F24690

INSTALLATION POINT

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.