
BODY LOWER BACK PANEL (ASSY)

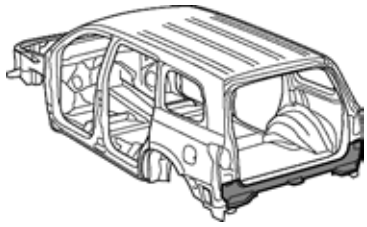

F29835A


With the back door opening reinforcement and body lower back inner panel removed.

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: Spot Weld : Plug Weld

F29835B

REMOVAL·INSTALLATION

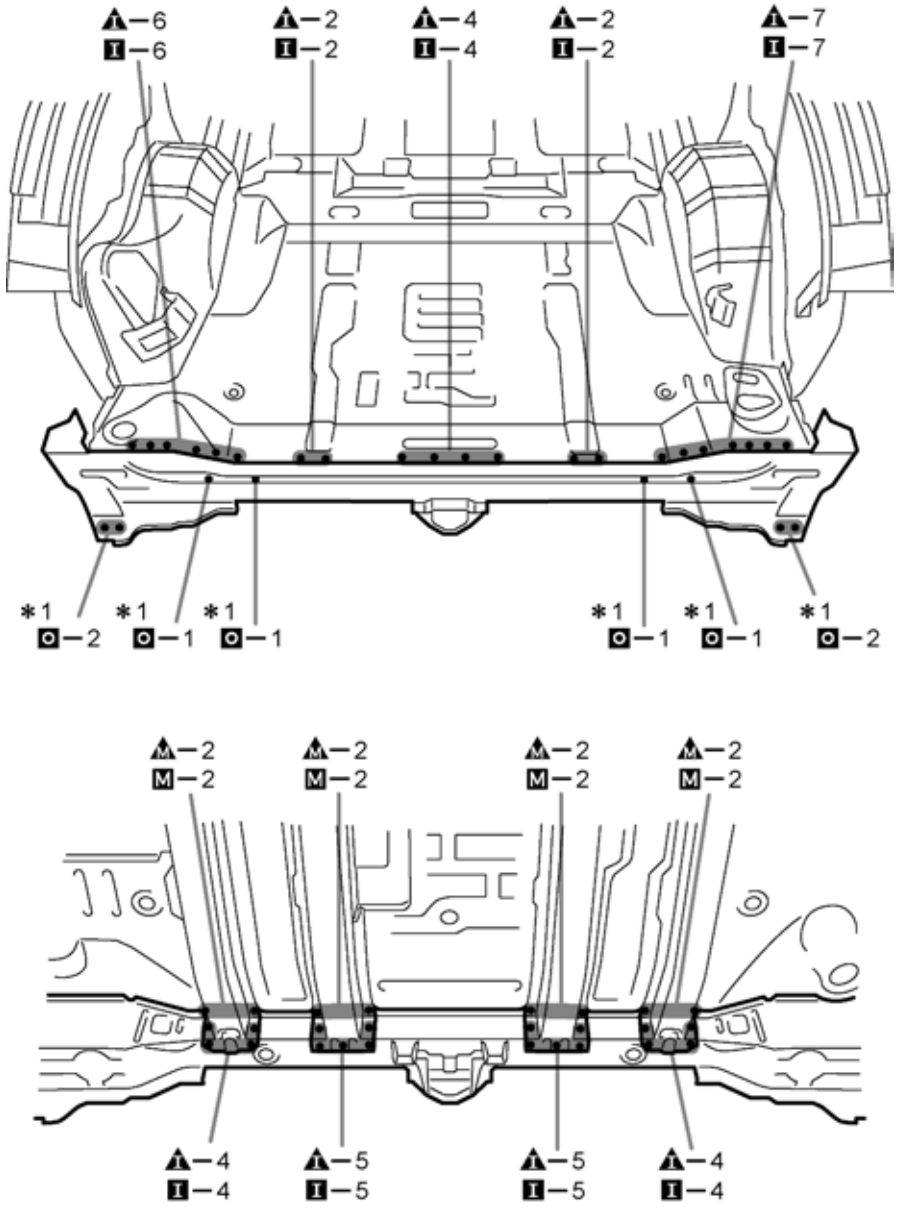

F29835

INSTALLATION POINT


1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.


2 *1 is only for installation.

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: Spot Weld : Plug Weld

F29835B

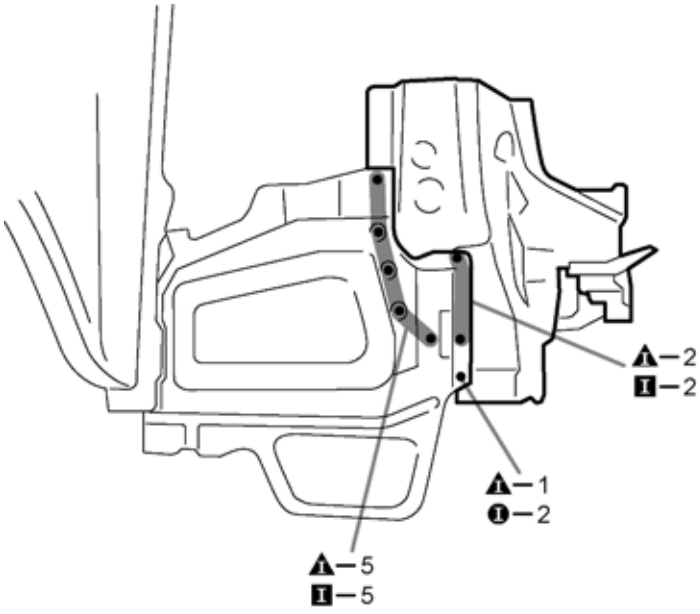

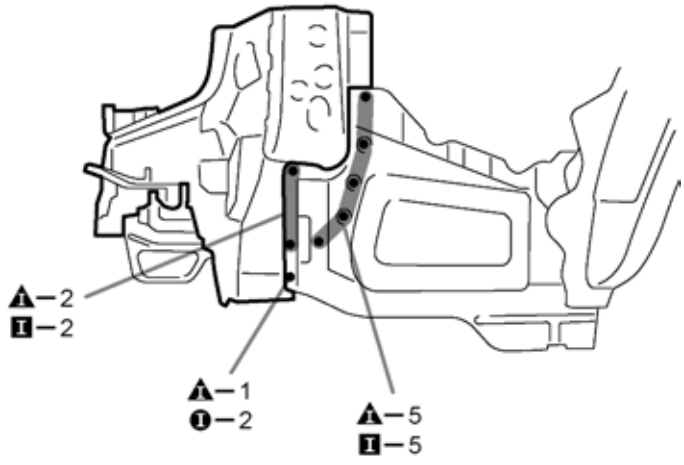

F29836

INSTALLATION POINT

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
3 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
4 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.