

BODY LOWER BACK PANEL (ASSY): Hatchback


F22861A

REPLACEMENT

REMOVAL

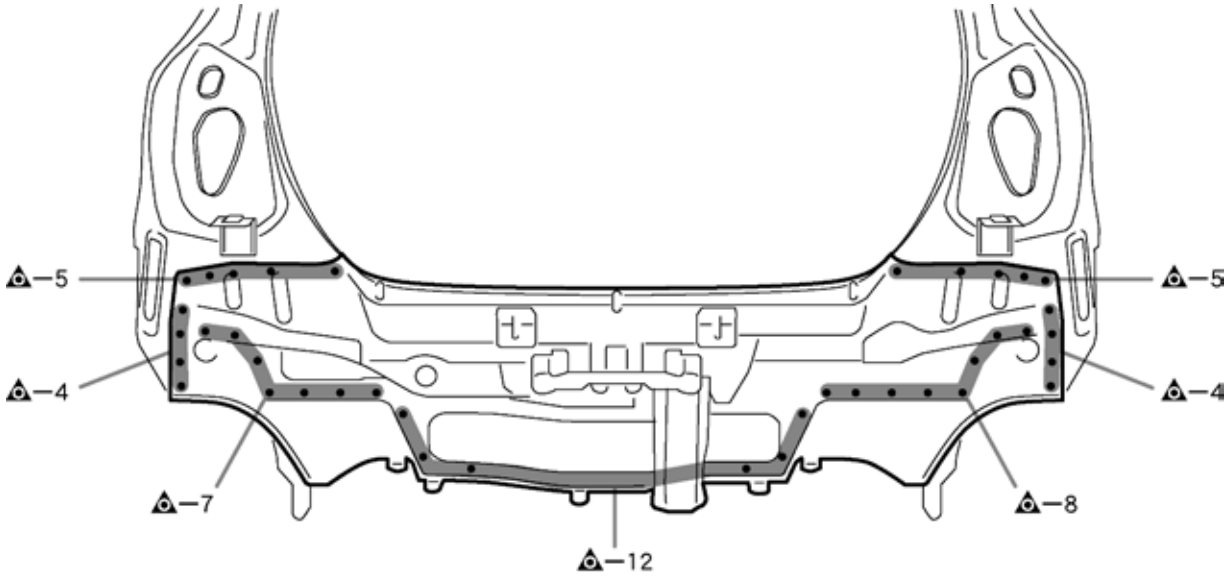


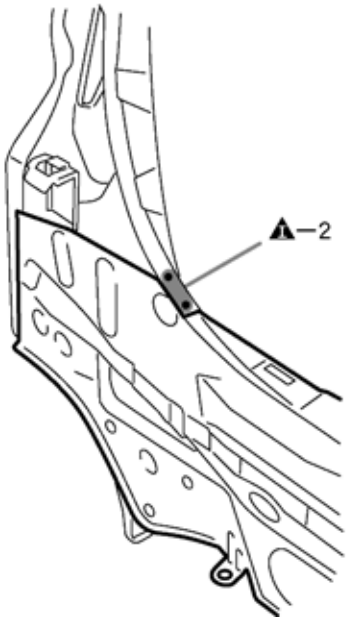

F23325

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

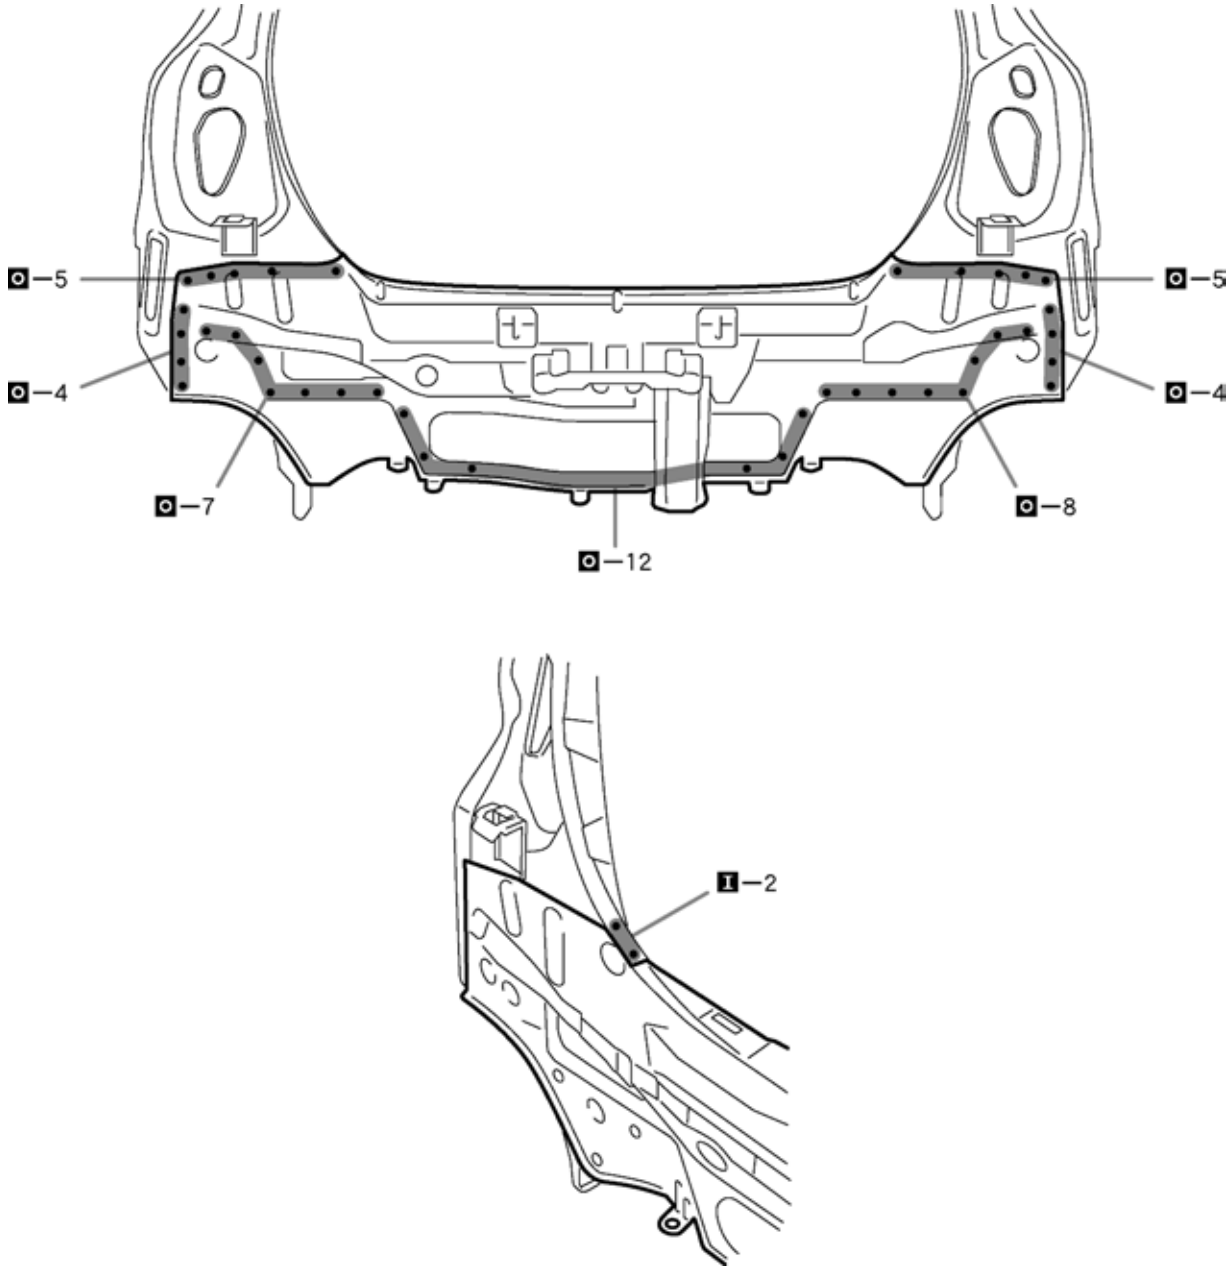

F23326

POINT


1 Inspect the fitting of the back door, rear combination light and other related parts before welding as this affects the appearance of the finish.


BODY LOWER BACK PANEL (ASSY): Sedan


F24844A

REPLACEMENT

REMOVAL

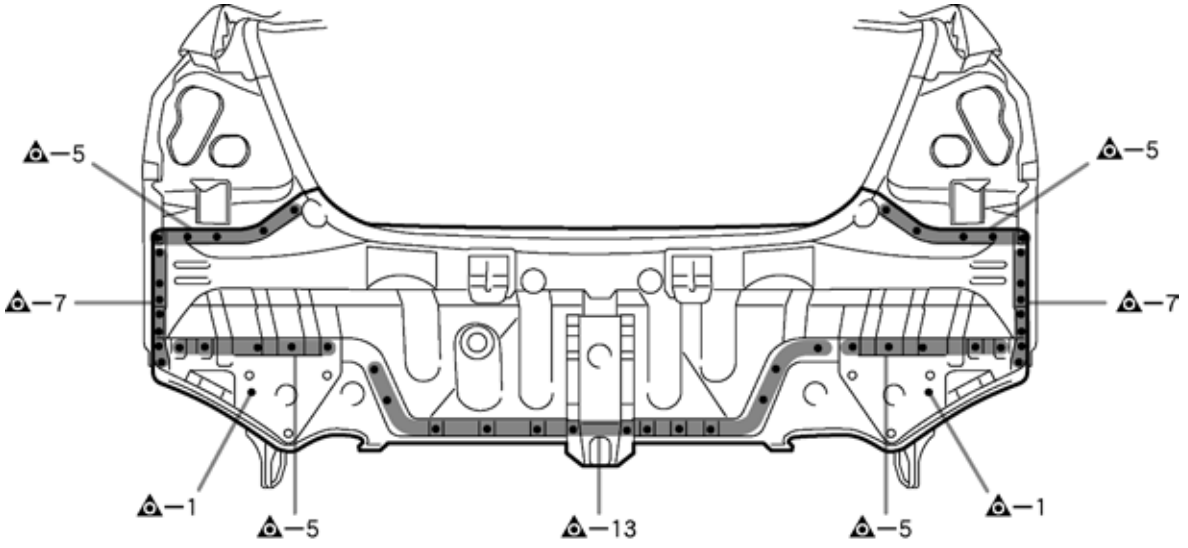


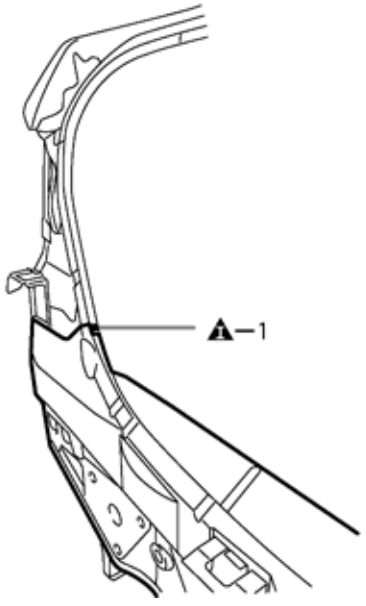

F24844-1

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

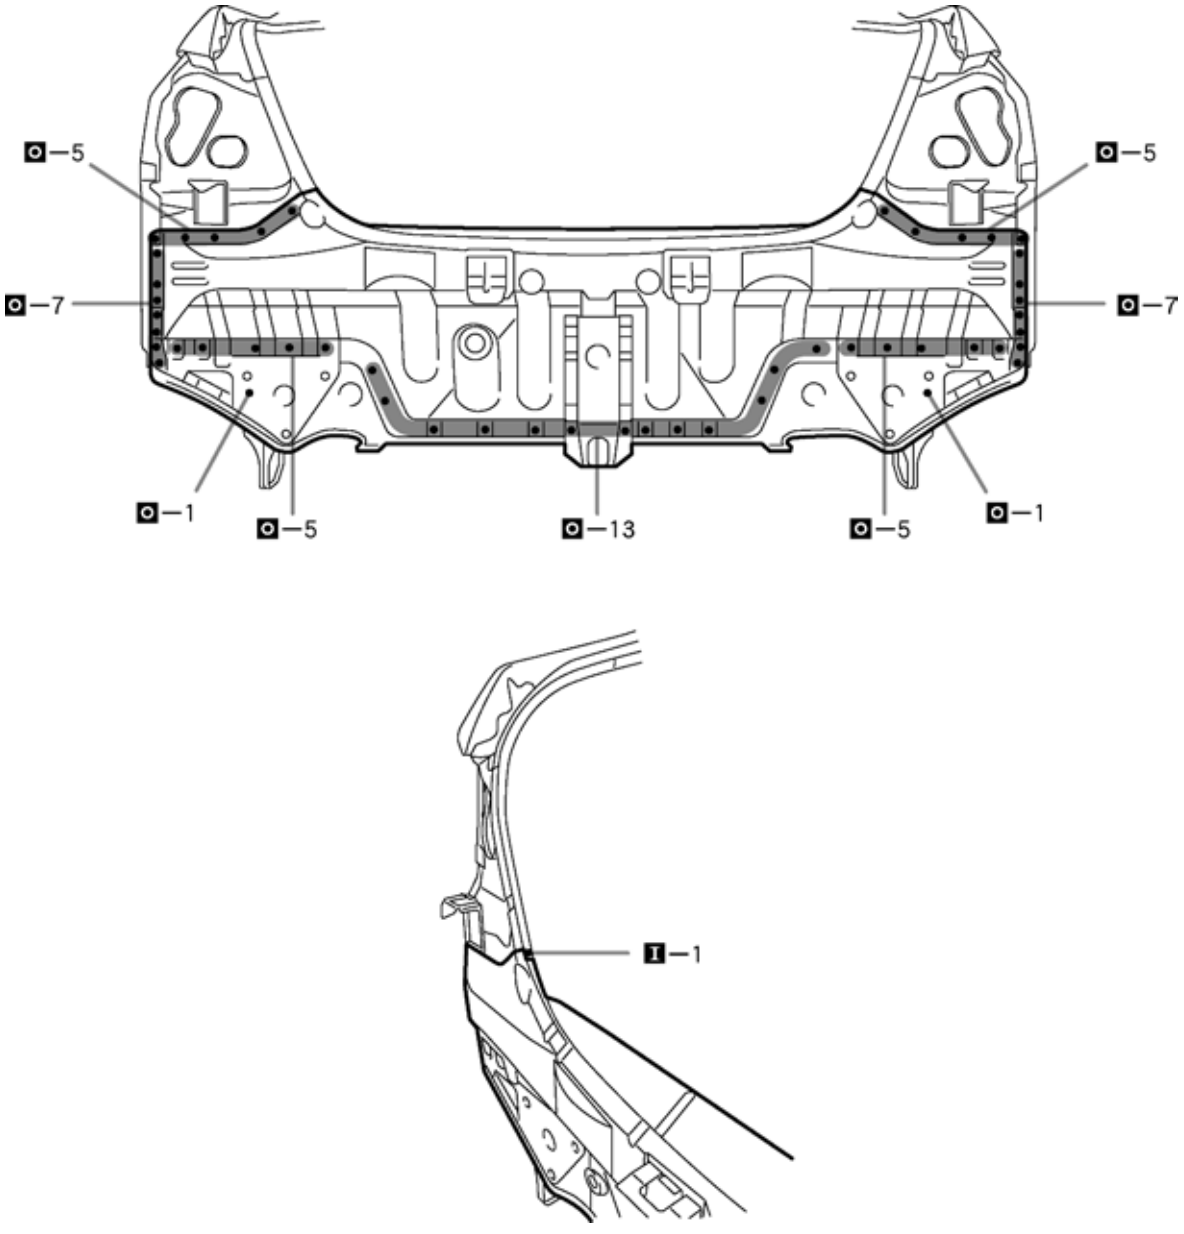

F24844-2

POINT

1 Inspect the fitting of the back door and rear combination light and other related parts before welding as this affects the appearance of the finish.