

FRONT SIDEMEMBER REINFORCEMENT (ASSY)


F22829A

REPLACEMENT
With the radiator support and front fender apron removed.

REMOVAL

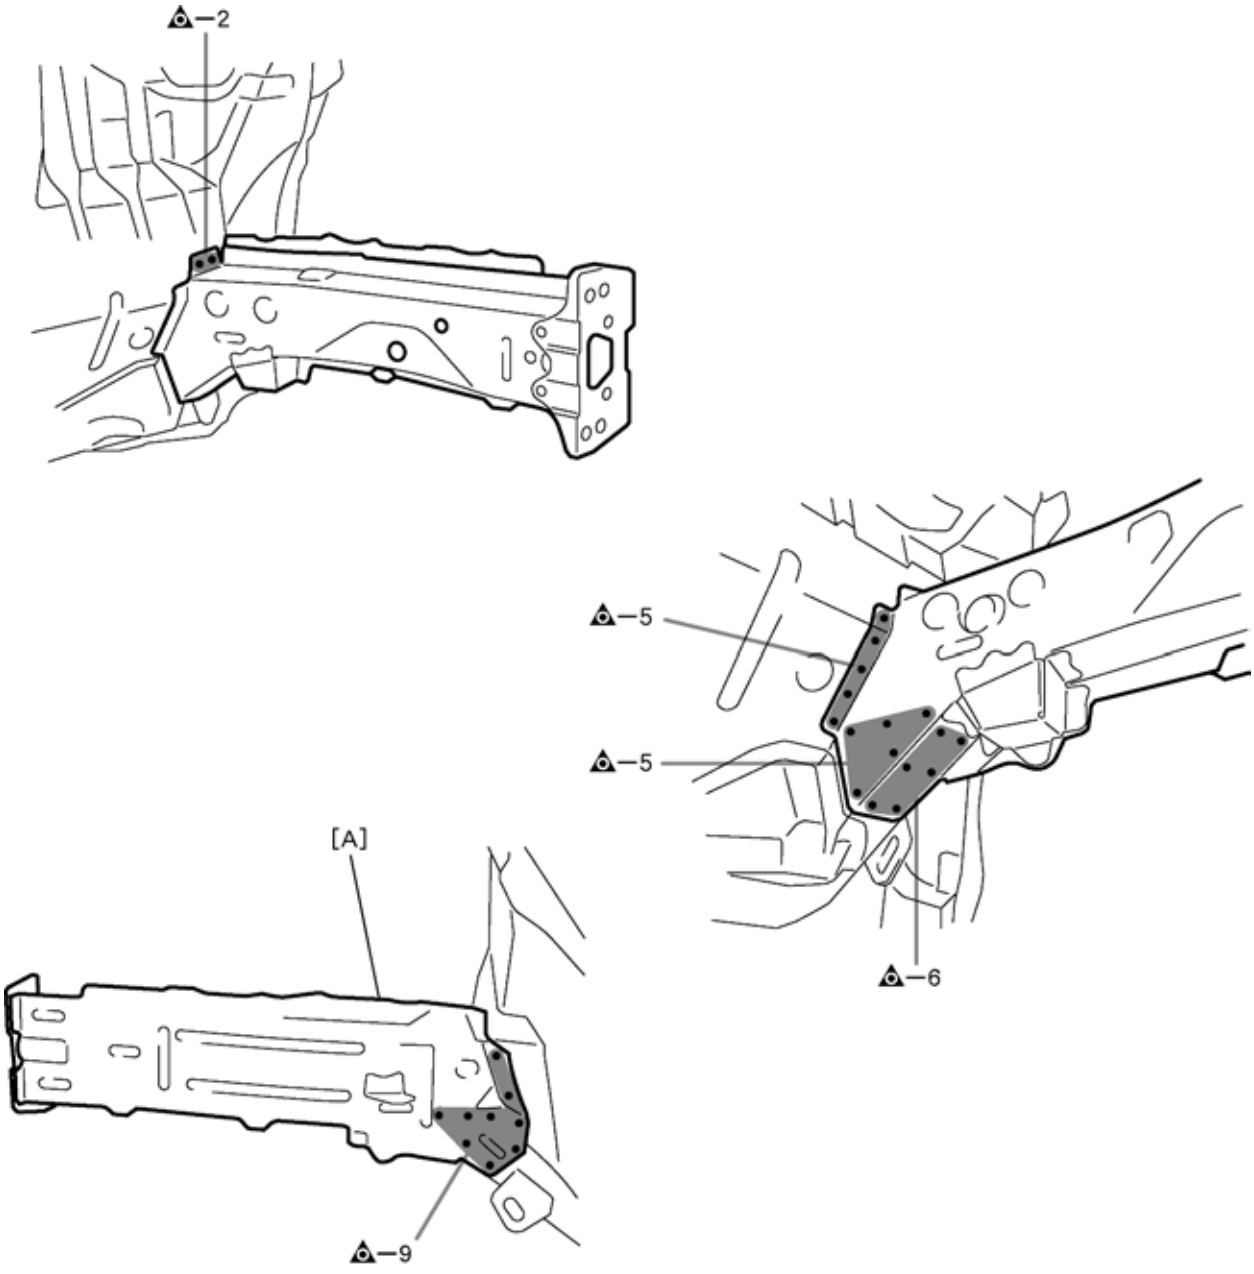


F22829

POINT
1 Remove [A] at the same time.

PART NAME
[A] Front Sidemember Outer Plate

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

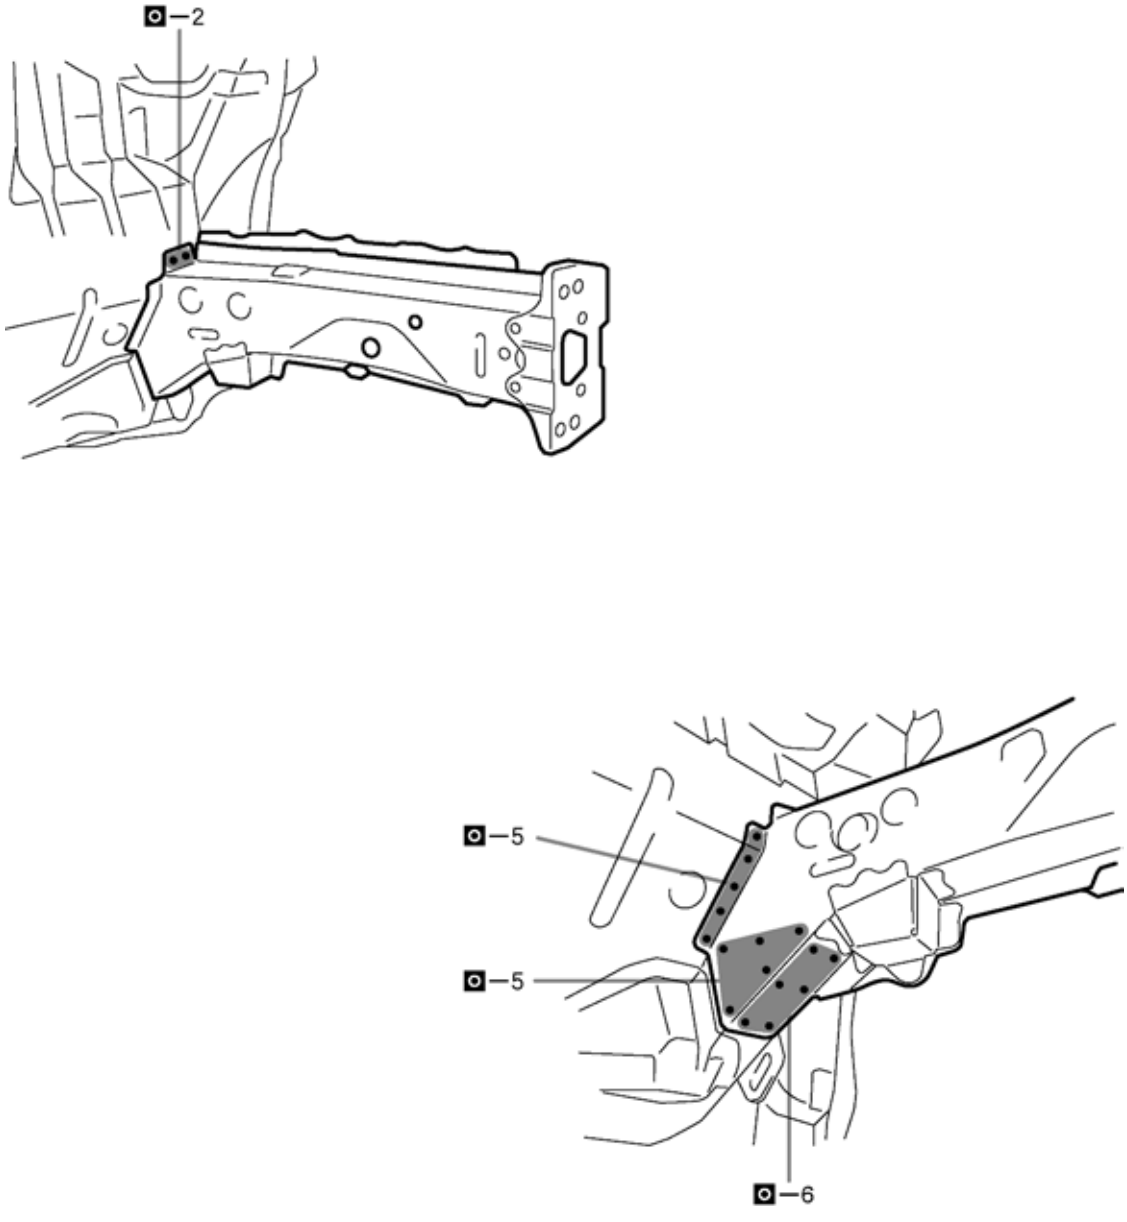


F22830


POINT

1 Make sure to attach correctly in accordance with the body dimension diagram as this part affects the front wheel alignment.

[LH]

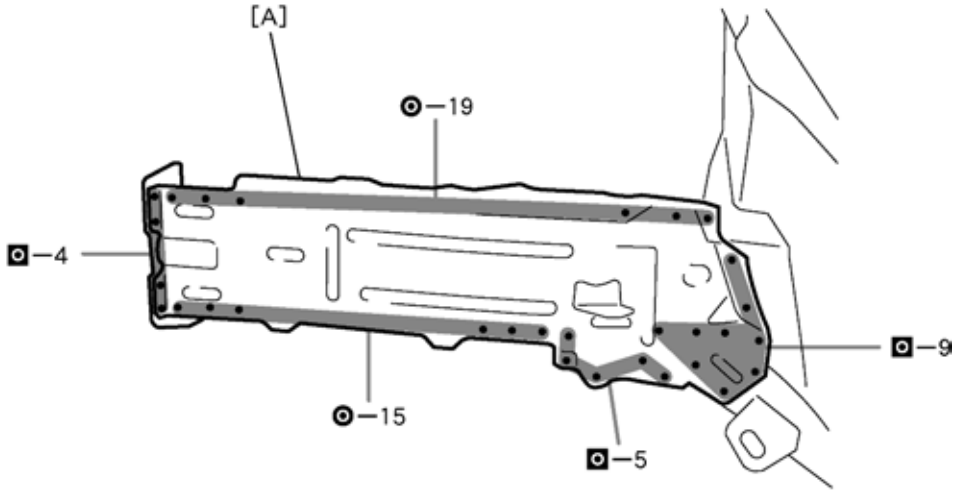

[RH]

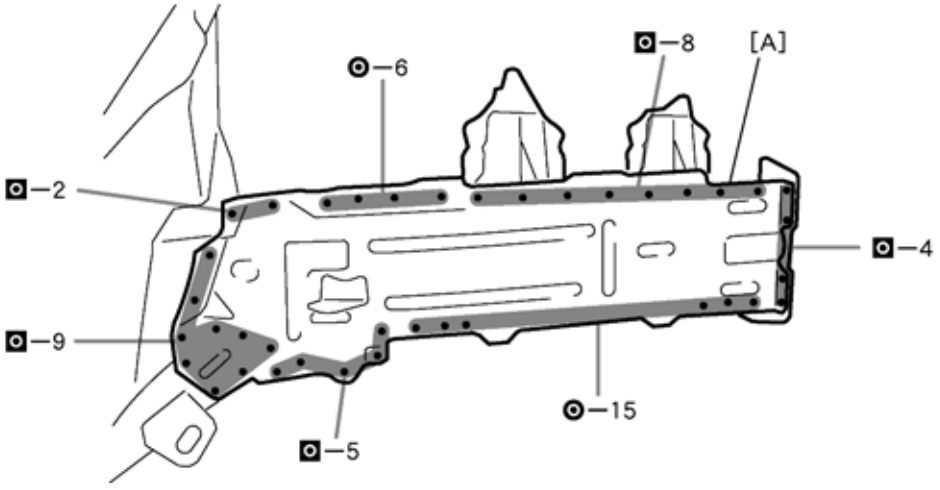

F22831

PART NAME

[A] Front Sidemember Outer Plate